

INSTALLATION INSTRUCTIONS

Item# 14226-XXX-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Loosen the decorative screws (F) from the canopy (D), detach the metal frame (H). Thread two mounting screws (B) into mounting plate (A) spaced the same distance apart as the holes on canopy (D). (You can adjust the length of screws if necessary.)

4. Attach mounting plate (A) to junction box (Not included) using outlet box screws (E) (Size: #8-32N*L1"). The side of the mounting plate (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 3)

5. Connect electrical wires as shown in Fig.3, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (A) using the green screw (C) provided.

6. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Placing the canopy (D) to the ceiling by aligning the protruding mounting screws (B) all the way through the mounting plate (A) and twisted onto the holes of canopy (D). Tighten the mounting screws (B) to fasten the fixture until held firmly against the ceiling.

8. Secure metal frame (H) with canopy (D) by using decorative screws (F). Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Dimmable with ELV and/or LED compatible wall dimmer switches.

The LED module includes 5 CCTs

(2700K/3000K/3500K/4000K/5000K), please select the desired color temperature before installation.

Replacing LED module (Fig. 2)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 2)

Warning: Turn off power at the circuit breaker before replacing LED module.

a. To remove the fixture frame (H) from the fixture, loosen decorative screws (F), To remove the canopy (D) from the ceiling, loosen mounting screws (B), remove the wire connectors and place the canopy (D) on a clear flat surface. (Fig.1&Fig.2)

b. Loosen screws (K) to separate lens (J) and LED module (I) from canopy (D).

c. Reverse steps a-c for installing the new LED module (I).

Note: The LED module should be provided by a specified supplier.

Fig.1

Set#A-020

-Mounting plate

-Ground Screw

-Outlet Box Screw*2

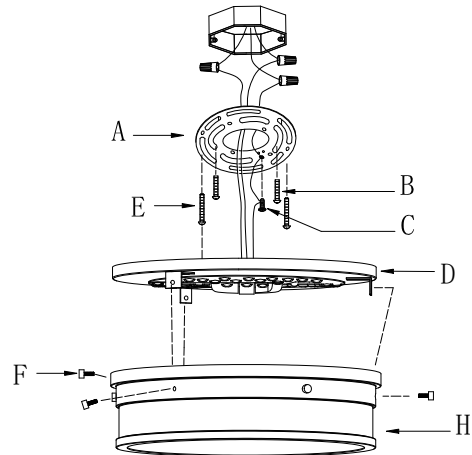


Fig.2

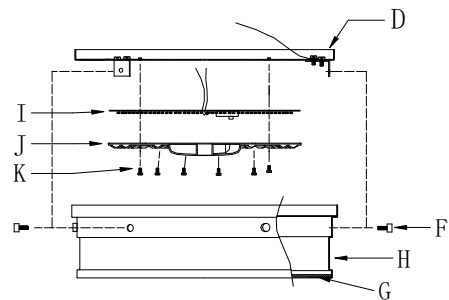


Fig. 3

FIXTURE WIRES
Black or
Smooth



HOUSE WIRES
Black
(Hot)

FIXTURE WIRES
White or
Ribbed



HOUSE WIRES
White
(Neutral)

FIXTURE WIRES
Bare
Copper
(Ground)




HOUSE WIRES
Green
(Ground)



american
lighting
association

Fig.4

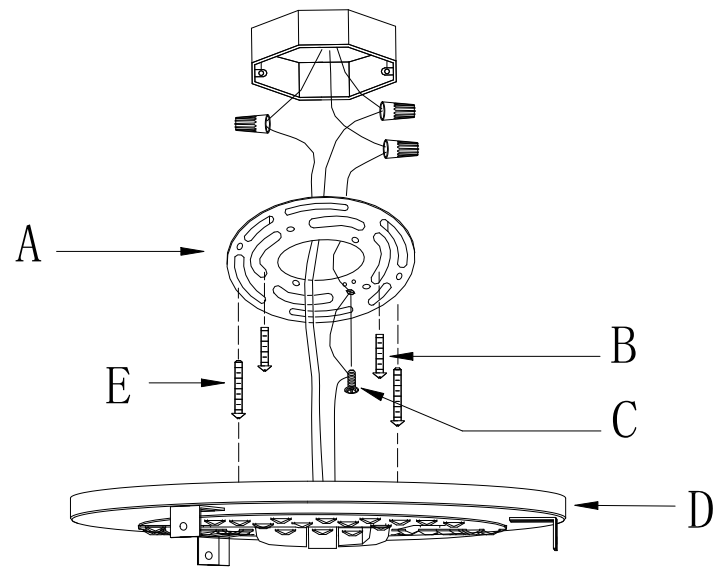

a. Hardware Bag:

- A. Mounting plate*1
- B. Mounting Screw*2
- C. Ground screw*1
- E. Outlet Box Screw*2

