


237709-001 Meredith Large Chandelier

PARTS ENCLOSED:

ITEM	DESCRIPTION	QTY.
(A)	Mounting plate	1
(B)	Mounting Plate Screws	8
(C)	Canopy	1
(D)	Canopy Screw	4
(E)	Main Body	1
(F)	Glass	198 Pcs + 02 Pcs extra
(G)	PVC Washer	198 Pcs + 07 Pcs extra
(H)	Extension Pipe	1
	(18" - 2 Pcs, 12" - 2 Pcs, 6" - 2 Pcs)	
(I)	Bulb (not included)	7

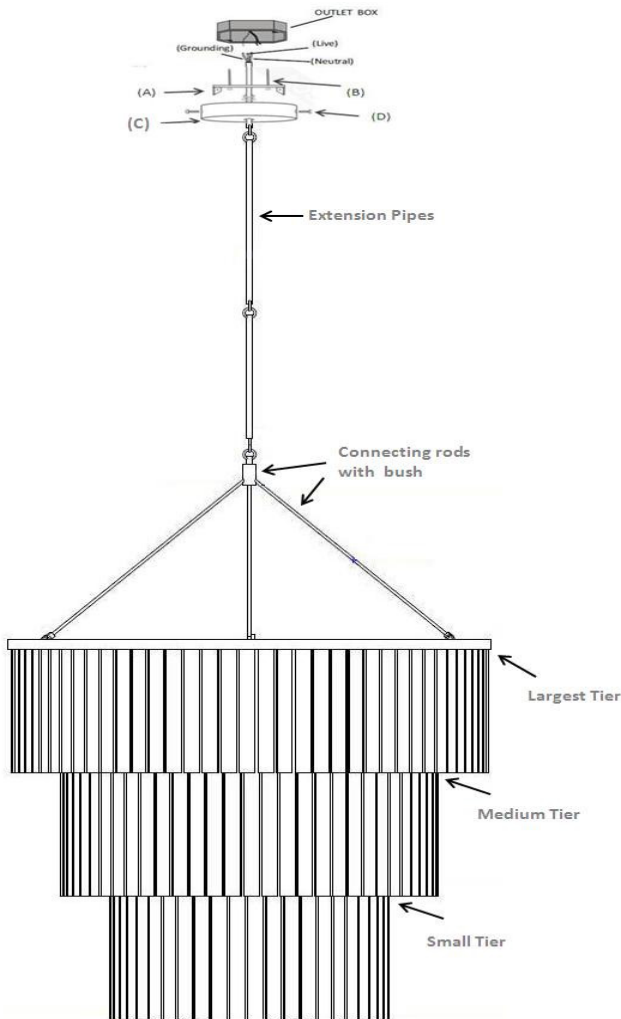

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial - type applications of very heavy Pendants.
2. It is recommended to use 7 x 40 - Watt maximum Type B standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The manufacturer and distributor accept no liability for incorrect installation.
5. For indoor use only.
6. Keep away from children.

WARNINGS:

1. Turn - off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instruction may result in a risk of fire or electric shock. Please read all instructions completely before installation.

TO ASSEMBLE:

1. Carefully unpack the pendant. Do not discard any material till assembly is complete.
2. Remove all the packing from the Chandelier.
3. Turn OFF power to the Outlet box where the ceiling light will be installed.
4. At this step, one person is needed to hold the largest tier and one person pass the quad wire from centre hole and rotate the quad clock wise on the tier for fixation.
5. Attach the three connecting rods to largest tier ring with the help of quick Link.
6. Pass the quad wire from the bush of three rods.
7. Attach Extension Pipe hooks onto the three connecting wire bush ring & pass the attached electric cable through the desired amount of pipes, keeping the ring part of the pipes toward the ceiling.
8. Gently pull wiring down from ceiling junction box and allow to hang
9. Remove the Mounting Plate (A) from the Canopy (C) by unscrewing Top Screw (D)
7. Attach Terminal Mounting Plate (A) to the ceiling Outlet Box.
8. Attach the Ground Wire, Neutral wire & Live wire to respective wires of the Outlet Box.
9. Install the Canopy (C) to Mounting plate (A) and fix it by Canopy Screw (D).
10. Now attach the medium size ring to the largest ring with the help of quick link
11. Link after that attach the smallest size ring to the medium ring with the help of quick link.
12. Install 7 Type B bulb maximum 40 watt (not included) into the Socket
13. Put the PVC washer onto the hook and hang the glass after it. Repeat the same procedure on all the glass.
11. Restore Power to the Outlet box and test ceiling light fixture.

CARE INSTRUCTIONS:

To clean, use a soft dry cloth only. Do not use any chemical or abrasive cleaners.