


24351-001 & 24352-001 Meredith Linear Chandelier

PARTS ENCLOSED:

ITEM	DESCRIPTION	QTY.
(A)	Mounting plate	1
(B)	Mounting Plate Screws	6
(C)	Canopy	1
(D)	Canopy Screw	4
(E)	Main Body	1
(F)	Glass	180 Pcs + 02 Pcs extra
(G)	PVC Washer	180 Pcs + 06 Pcs extra
(H)	Extension Pipe	2 Set
	(12" - 4 Pcs, 6" - 2 Pcs)	
(I)	Bulb (not included)	8

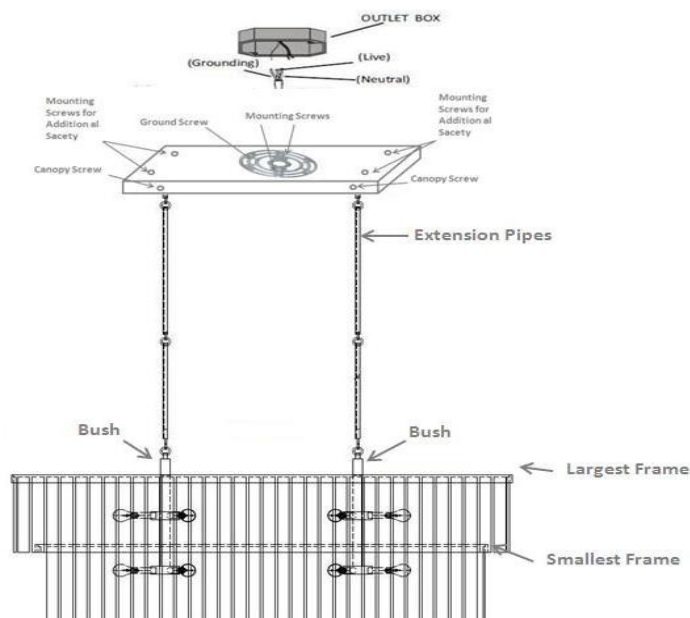

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial - type applications of very heavy chandelier.
2. It is recommended to use 8 x 40 - Watt maximum Type B standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The manufacturer and distributor accept no liability for incorrect installation.
5. For indoor use only.
6. Keep away from children.

WARNINGS:

1. Turn - off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instruction may result in a risk of fire or electric shock. Please read all instructions completely before installation.

TO ASSEMBLE:

1. Carefully unpack the chandelier. Do not discard any material till assembly is complete.
2. Remove all the packing from the Chandelier.
3. Turn OFF power to the Outlet box where the ceiling light will be installed.
4. At this step, one person is needed to hold the largest frame and one person pass the quad wire from centre hole and align the holes and tighten the quad one by one
5. Attach Extension Pipe hooks onto the bush & pass the attached electric cable through the desired amount of pipes, keeping the ring part of the pipes toward the ceiling.
6. Gently pull wiring down from ceiling junction box and allow to hang
7. Remove mounting plate from the canopy by unscrewing the side screws.
8. Align holes in mounting plate with holes in junction box and attach with two mounting screw and mark location of 4 dry wall anchor installation for additional mounting screws. Remove mounting plate.
9. Drill 5/16" pilot holes in ceiling. Position dry wall anchor over 'hole and gently tap anchor into ceiling until cap prongs are embedded in ceiling and cap is snug against surface. Then put the mounting plate align with ceiling holes and tighten heavy mounting screw until resistance is felt. Now, attach mounting plate to junction box using mounting screws.
10. Attach the Ground Wire, Neutral wire & Live wire to respective wires of the Outlet Box.
11. Install the Canopy to Mounting plate and fix it by Canopy Screw .
12. Now attach the smallest frame to the largest frame with the help of quick Link.
13. Install 8 Type B bulb maximum 40 watt (not included) into the Socket
14. Put the PVC washer onto the hook and hang the glass after it. Repeat the same procedure on all the glass.
15. Restore Power to the Outlet box and test ceiling light fixture.

CARE INSTRUCTIONS:

To clean, use a soft dry cloth only. Do not use any chemical or abrasive cleaners.