

A—N—D


# VALE SERIES CEILING/WALL

DESIGNER  
CAINE HEINTZMAN

INSTRUCTIONS



SCAN HERE

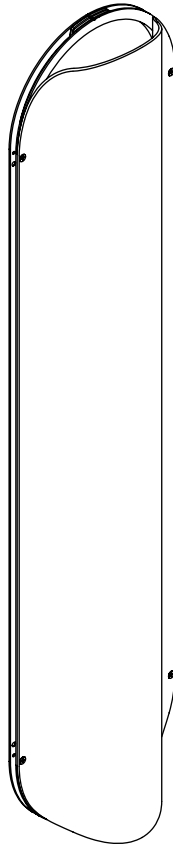

NORTH AMERICA



A-N-D.COM

# INSTALLATION NOTES

---

It is recommended that two people install the Vale Ceiling/Wall: one to gently support the luminaire while the other makes the electrical and mechanical connections.

Both installers should wear clean gloves and take great care not to damage the luminaire.



## CARE INSTRUCTIONS

Always wear clean gloves when handling the luminaire. Clean finished surfaces with a soft, lint-free cloth. Clean acrylic diffuser with a soft lint-free cloth and soap and water if necessary.

For replacement parts contact A-N-D directly. Never exceed the recommended wattage, as doing so may damage the luminaire or cause a fire.



## WARNING

The luminaire must be installed by a qualified electrician in a dry indoor location.

Failure to meet any or all of these criteria will not only damage the luminaire, but will void both the warranty and all of its certifications.

Always ensure circuit breaker is off prior to making electrical connections.

# LED DRIVER OPTIONS

A—N—D

The Vale CW LED driver varies depending on dimming requirements and input voltage.

Use the ordering code to determine the selected driver:  
ie. VAL-1-CW-ANT-CLR-27-010-120

DIMMING --- INPUT VOLTAGE


## PHASE CUT DIMMING (PC)

M-28 SERIES - ES POWER

INPUT: 120VAC

OUTPUT: 24VDC, 24W

L x W x H: 89 x 42 x 31

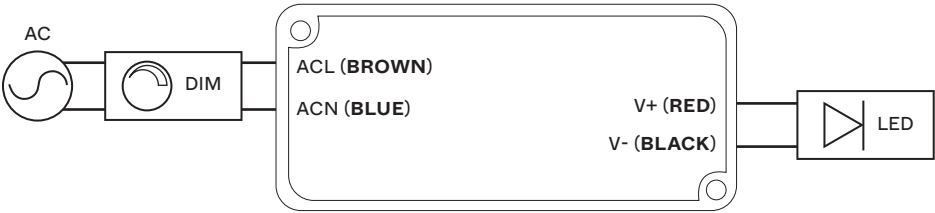


## 0-10 + PWM DIMMING (010)

Q22-P SERIES - ES POWER

INPUT: 110-277VAC

OUTPUT: 24VDC, 22W

L x W x H: 89 x 42 x 31

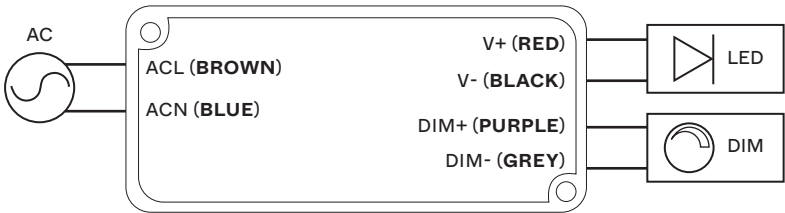

# COMPONENTS

---

① JUNCTION BOX (NOT INCLUDED)

② WIRE NUT (4)

③ LED DRIVER

④ UNIVERSAL BACKPLATE

⑤ #8-32 MOUNTING SCREWS (2)

⑥ JUMP WIRE

⑦ WAGO CLIPS (2)

⑧ COVER PLATE


⑨ FRAME

⑩ LED COMPONENT


⑪ M4 X 35MM (2)

⑫ LENS

⑬ CLEAR LENS SCREW(4)

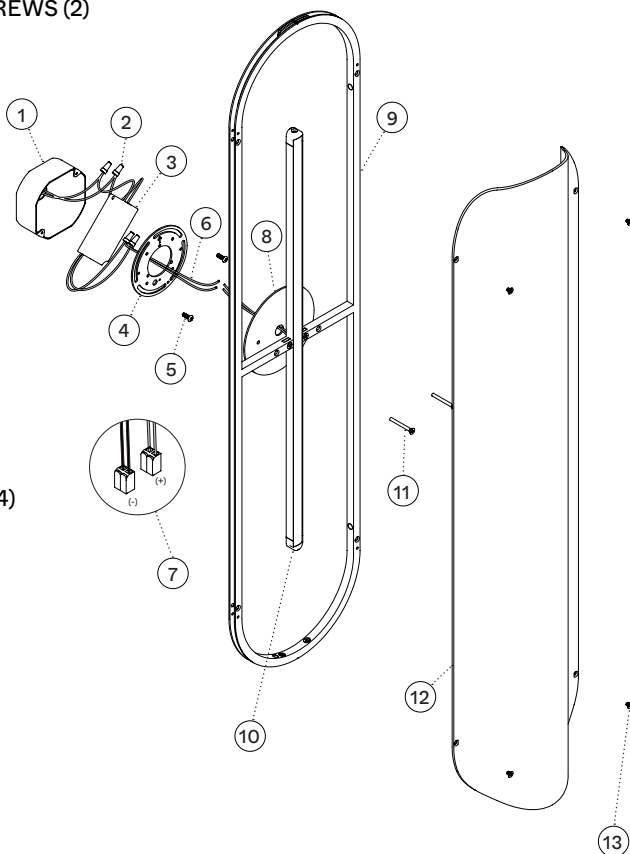

The Vale Ceiling/Wall can be installed on a ceiling or wall, vertically or horizontally.

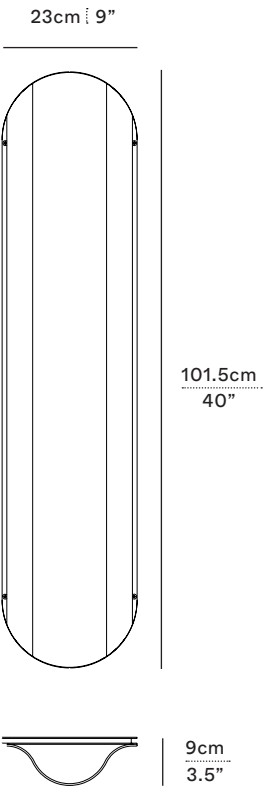


# INSTALLATION

## STEP 1

Connect driver, jump wire, and dimming wires if applicable. Refer to the driver model options on **PAGE 3**.

Put the driver into the enclosure and attach the universal mounting plate to the electrical enclosure using the provided #8-32 screws. Connect the wires from the fixture through the backplate to the jump wires.

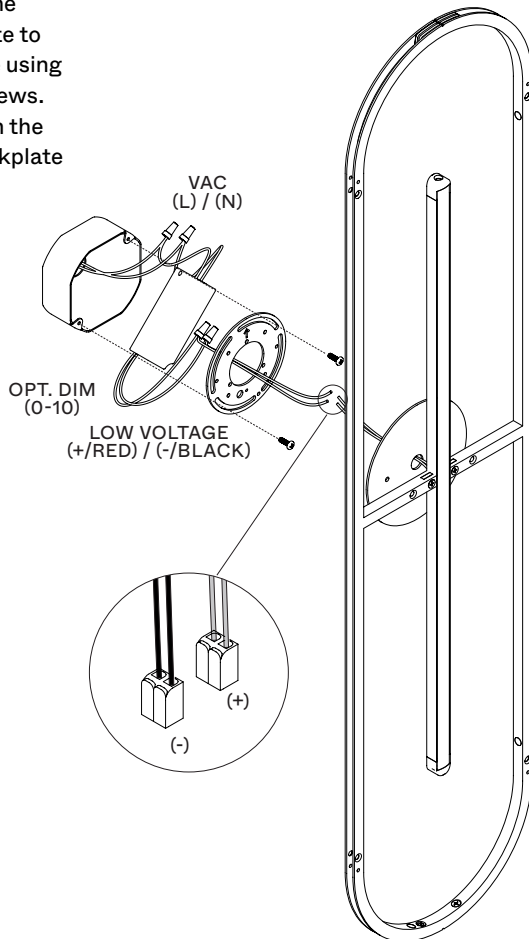


REFER TO PAGE 3: DRIVER OPTIONS FOR MORE DETAILS

---

**STEP 2**

Tuck wires into the electrical enclosure. Attach the M4 x 35mm screws through the frame, coverplate and into the universal backplate.

Tighten until secure.

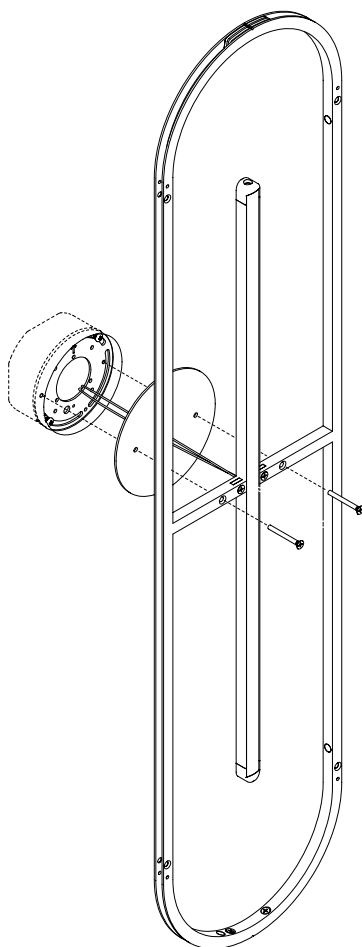


# INSTALLATION

---

## STEP 3

Using the clear polycarbonate screws, mount the lens to the frame. Do not overtighten.

Your installation is now complete.

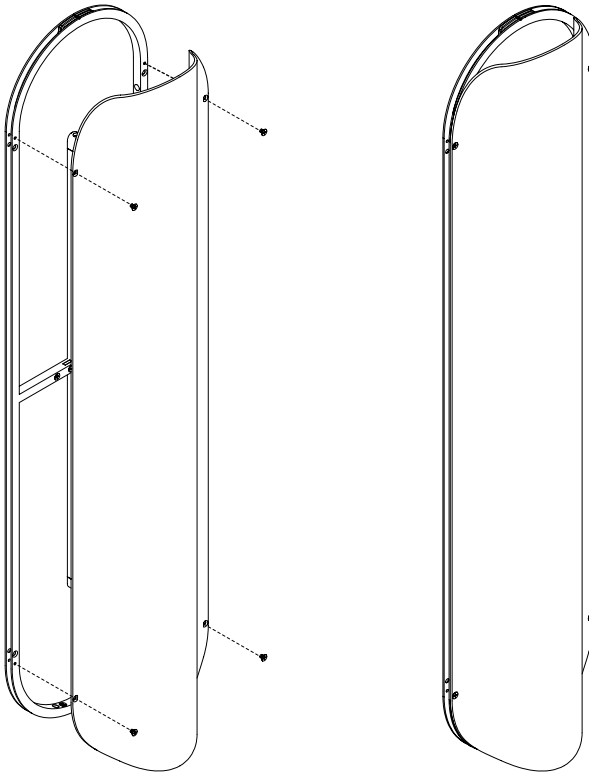

## A—N—D

For support, please contact:  
[info@a-n-d.com](mailto:info@a-n-d.com)  
+1 604 563 6938

1951 Franklin St,  
Vancouver, BC  
Canada V5L 0C7