
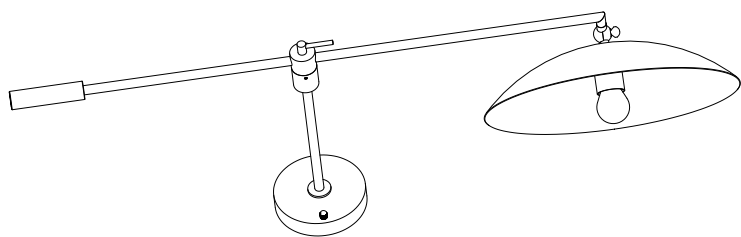







ASSEMBLY & INSTALLATION INSTRUCTION


Model: Lance scone



3D VIEW

ACCESSORIES LIST			
No.	Name	Image	Qty
1	LAMP BODY		1
2	MOUNTED PLATE		1
3	BULB LIGHT E26		1
4	PLASTIC ANCHOR (NOT INCLUDED)		4
5	UMBRELLA SCREW (NOT INCLUDED)		4
6	FINIALS		2

REQUIRED TOOL

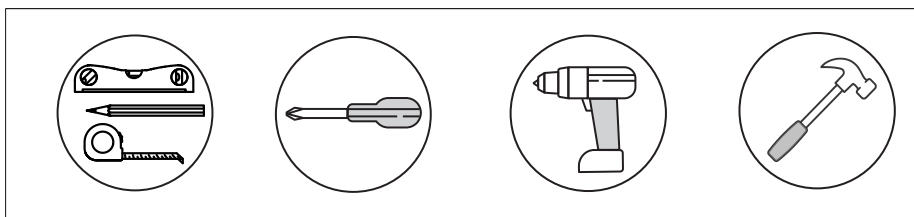

! Attention

Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

When assembling, place all parts on a soft, clean, and flat surface such as a carpet to prevent scratches.

! WARNING

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb. Do not touch or look directly at the bulb when fixture is illuminated. Keep flammable materials away from lit bulb.



THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

ASSEMBLY & INSTALLATION INSTRUCTION

Model: Lance sconce

- 1 Use a Mounting plate(2) to mark where you'll drill holes on the wall.



TOOLING

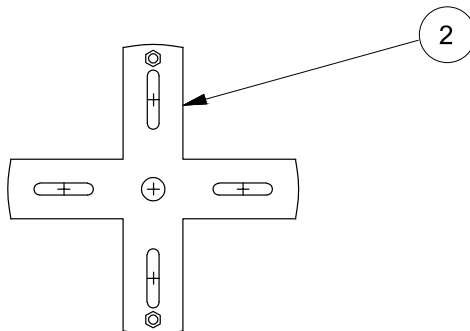

! Caution: Do not drill holes for plastic anchors in the same location as the in-wall electrical channel.


- 2 Selecting the correct drill bit and using a drill to bore holes at the marked locations to the specified depth as illustrated.

TOOLING

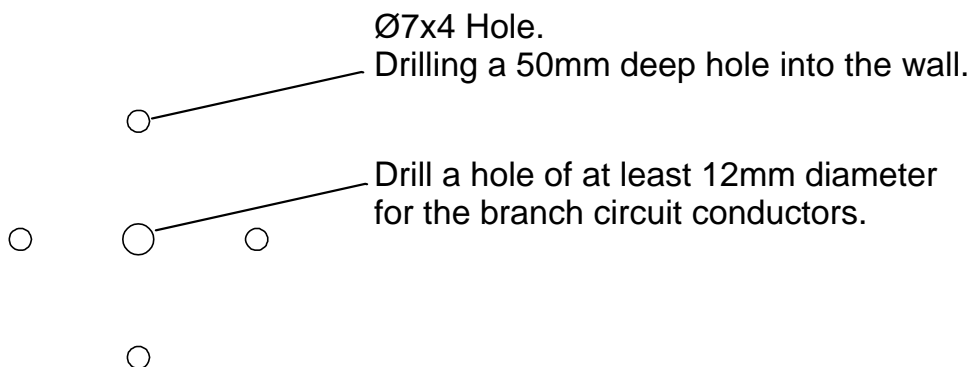

- 3 Mount plastic anchor(4) into the hole on the ceiling

TOOLING

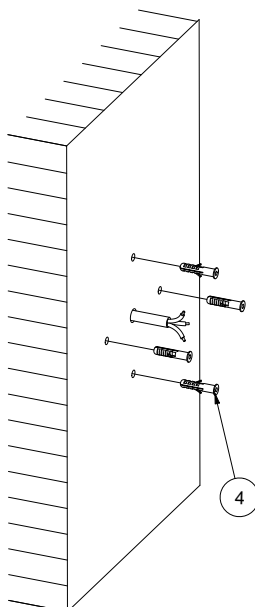



ASSEMBLY & INSTALLATION INSTRUCTION

Model: Lance sconce

4

Mount the mounted plate(2) to the ceiling by using umbrella screw(5) and screw it to plastic anchor(4) in the last step



TOOLING

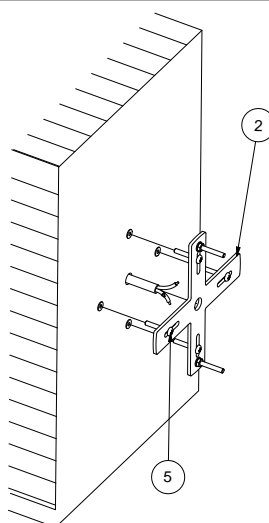

5

- Attach the neutral wire from power source to the slot opposite of the neutral wire (usually white) on the terminal in the canopy lamp and secure it with a screw.
- Attach the hot wire from power source to the slot opposite of the hot wire (usually black) on the terminal in the canopy lamp and secure it with a screw.
- Attach the ground wire from power source to the slot opposite of the ground wire on the terminal in the canopy lamp and secure it with a screw.

TOOLING

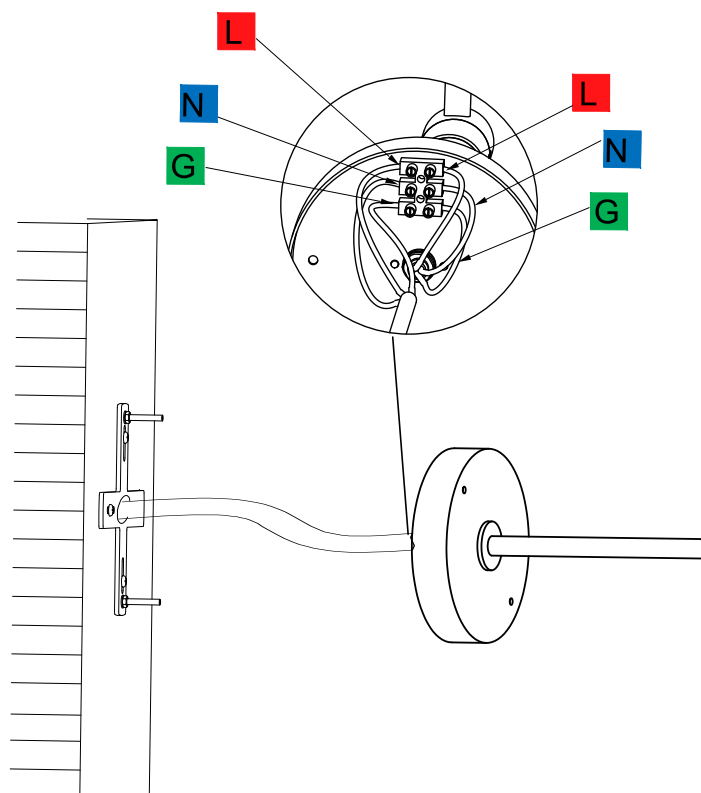


! Caution: Turn off main power before wiring

ASSEMBLY & INSTALLATION INSTRUCTION

Model: Lance sconce


6

Mount the lamp body(1) to the ceiling though the sink screw on the mounted plate(2) and lock it with finials bolt(6)

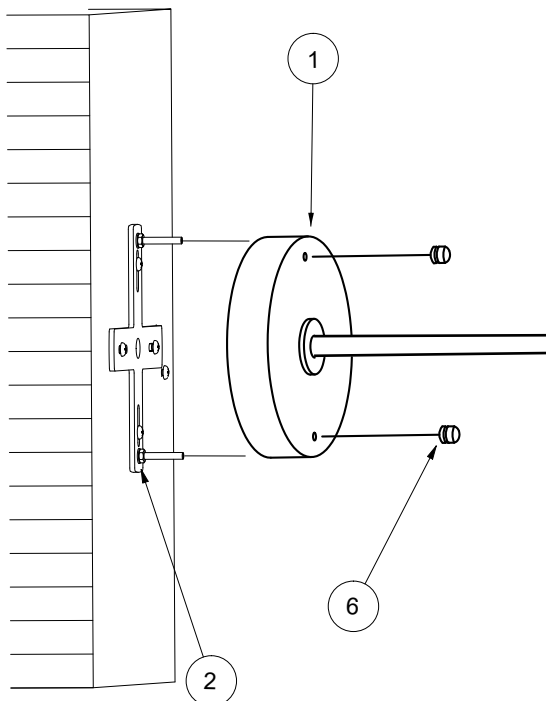

7

Insert and twist the bulb light(3) to the light socket in lamp body(1)

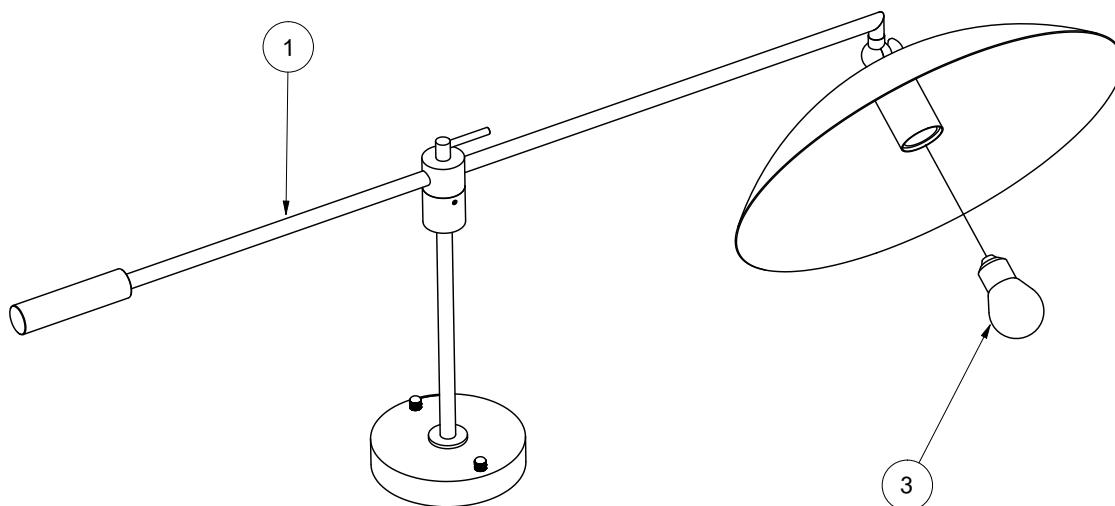


ASSEMBLY & INSTALLATION INSTRUCTION

Model: Lance scone

8

Twist the lever on the lamp body(1) counter clock wise to free the rotate max 180° of the lamp body and twist it clock wise to lock the rotate of the lamp body(1).

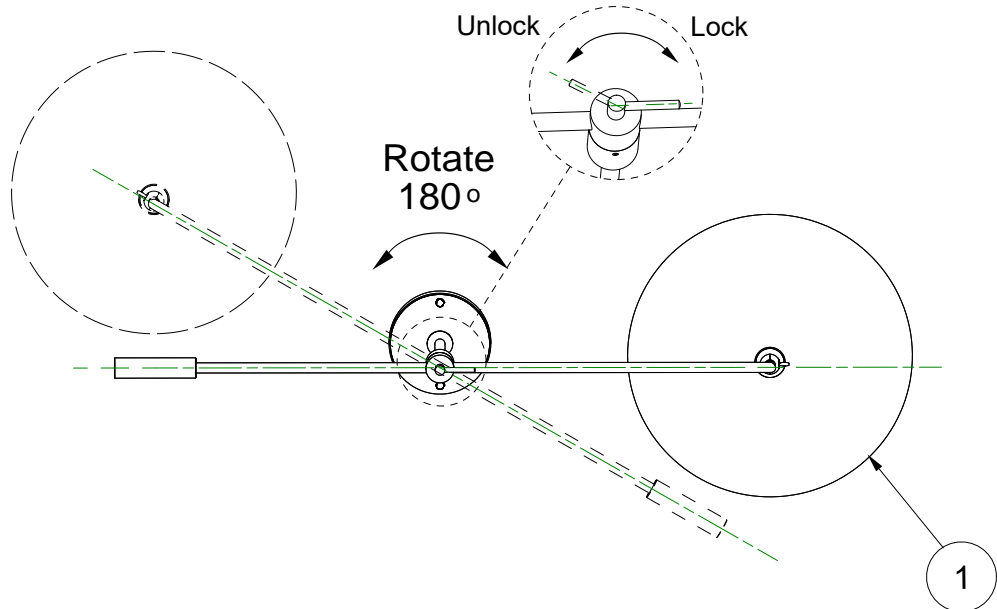

9

Twist the lever on top the lamp shade counter clock wise to free the rotate max 90° of the lamp shade and twist it clock wise to lock the rotate of the lamp shade.

