
Bola Pendant Collection
Installation Guide



Pablo®

PRIOR TO ASSEMBLY AND INSTALLATION, PLEASE READ THE FOLLOWING CAREFULLY.

IMPORTANT INFORMATION

- We recommend all ceiling mounted or flush wall fixtures be installed by a licensed electrician.Prior to installation, we advise carefully reviewing the assembly guide.
- Turn off power to the junction box before installing the lamp.
- Set the light switch to the off position.
- This fixture is specifically designed for indoor use and is not suitable for bathrooms or humid environments.
- Incorrectly wiring the fixture could potentially damage the fixture, LED, or components and void the warranty.
- Disassembling, modifying, or attempting to repair this fixture may void the warranty. For technical assistance, contact
- Pablo Designs' customer service department.
- All assembly guides are available for download on Pablodesigns.com in case this document is lost or damaged.

BOLA SPECIFIC

- When installing multiple lamps, wire them in parallel to achieve optimal light quality from each lamp. Wiring in series will lead to a gradual loss of light performance as the lamps move further away from the building power source.
- When installing multiple lamps of varying sizes, ensure the appropriate transformer is used for each light source.
- Incorrectly wiring the wrong size transformer to the LED can lead to the failure of both the light source and the transformer.

MATERIALS/ FINISHES

- Glass is fragile and can be easily damaged if mishandled.
- Opal glass is handblown, the artisanal craftsmanship can reveal subtle imperfections like air bubbles, thickness variations, or scratches, which emphasize the materials unique craft, exclusivity, and authenticity.
- Use provided gloves when handling lamps to avoid fingerprints.

CLEANING INSTRUCTIONS


- Only use a soft lint-free cloth for cleaning this fixture, dampened with water or a mild cleanser if needed. Avoid using alcohol, solvents, or abrasive cleaners, as they may harm the lamp finish.


LIGHT SOURCE REPLACEMENT

- Contact manufacturer for replacement


Contents

BOLA PENDANTS SHIP IN MULTIPLE BOXES IN ORDER TO ENSURE THE SAFETY OF ALL COMPONENTS.

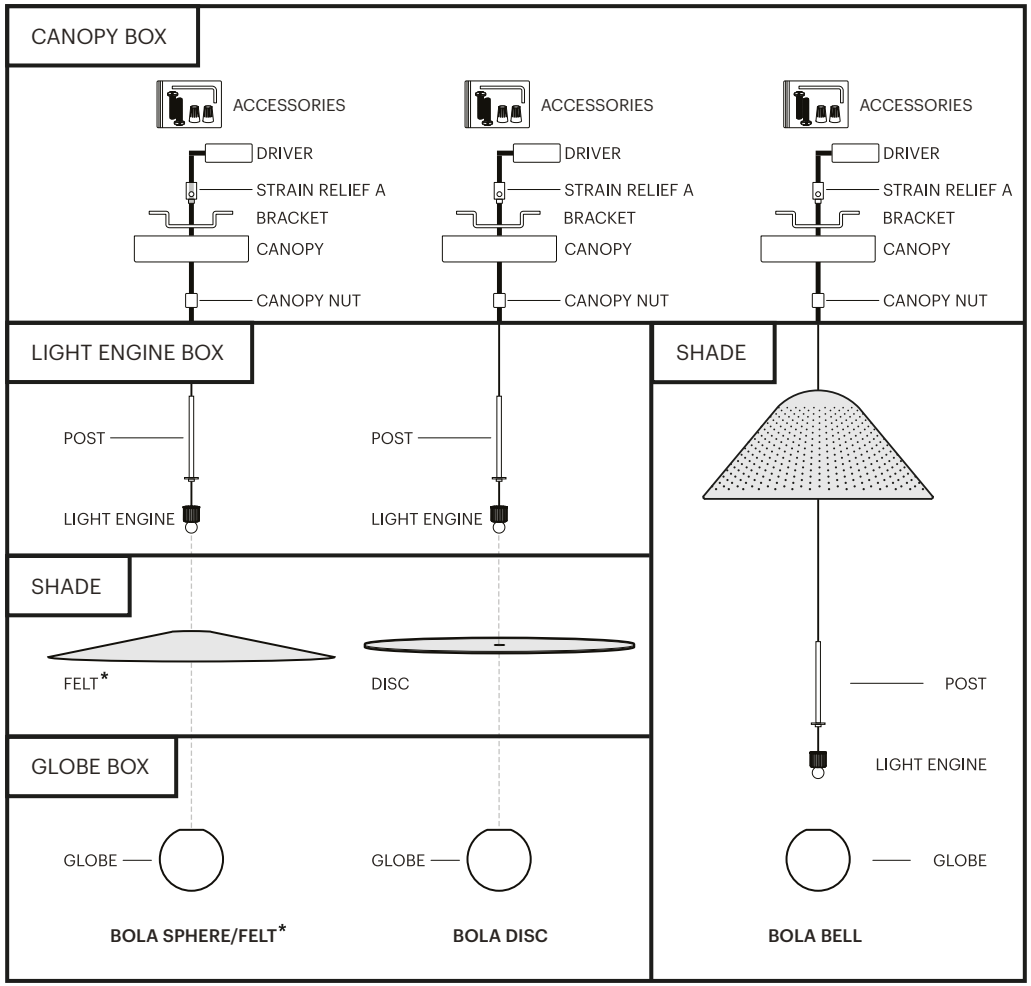



STEEL CABLE



STRAIN RELIEF B

FOR BOLA BELL 30, BOLA DISC 32 AND BOLA FELT 32, 42, 52; A STEEL SUPPORT CABLE KIT WILL BE

TECHNICAL SPECIFICATIONS

	POWER - LUMINOSITY - COLOR TEMP	DRIVER INPUT	DRIVER OUTPUT	DRIVER LOAD
BOLA 4,5 UNV. DTW (DISC 12,18)	6W - 290 lm - 2700-1800K DTW	120-277VAC, 0.06A 50/60Hz	300mA CC	10-20V, 40VDC LED, 6W MAX
BOLA 6 UNV. DTW (BELL 12, DISC 22, FELT 24)	12W - 800 lm - 2700-1800K DTW	120-277VAC, 0.12A 50/60Hz	350mA CC	15-34V, 42VDC LED, 12W MAX
BOLA 8,10,12,16 UNV. DTW (BELL 20,30, DISC 32, FELT 32,42,52)	20W - 1710 lm - 2700-1800K DTW	120-277VAC, 0.22A 50/60Hz	600mA CC	20-36V, LED, 22W MAX
BOLA 4,5 US. CCT (DISC 12,18, HALO 12)	6W - 290 lm - 3000K CCT	120-277VAC, 0.08A 50/60Hz	200mA CC	20-40V, 40VDC LED
BOLA 6 US. CCT (BELL 12, DISC 22, FELT 24)	12W - 800 lm - 3000K CCT	120-277VAC, 0.15A 50/60Hz	350mA CC	20-42V, 42VDC LED
BOLA 8,10,12,16 US. CCT (BELL 20,30, DISC 32, FELT 32,42,52)	20W - 1710 lm - 3000K CCT	120-277VAC, 0.2A 50/60Hz	500mA CC	20-42V, LED,


IF THERE ARE MISSING OR DAMAGED PARTS, PLEASE CONTACT US AS SOON AS POSSIBLE TO FILE A REPORT. CLEAR PHOTOS AND DESCRIPTIONS WILL ENABLE OUR CUSTOMER SERVICE TEAM TO QUICKLY AND EFFECTIVELY ADDRESS YOUR CLAIM.

(415) 865-5000
888 MARIN STREET
SAN FRANCISCO, CA 94124
INFO@PABLODESIGNS.COM
[**INFO@PABLODESIGNS.EU**]


Bola Pendant Collection
Installation Guide

Pablo


1 Remove the contents of the canopy box and separate key items.

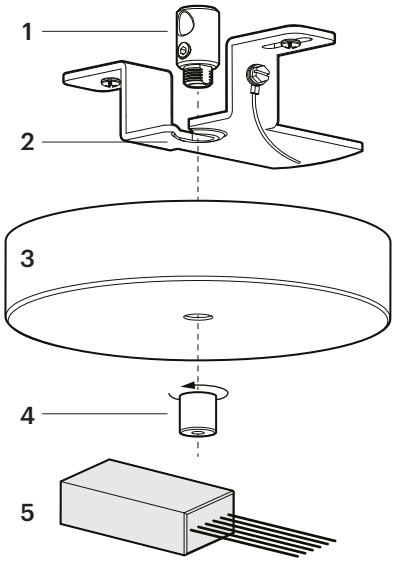

2 Peel protective later from VHB tape (included) and secure DRIVER to MOUNT BRACKET.

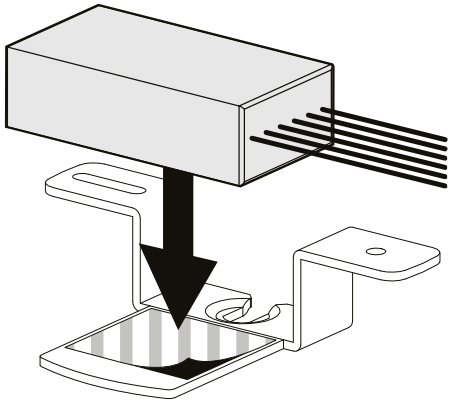


3 Secure MOUNT BRACKET to junction box using appropriate anchoring hardware (included).

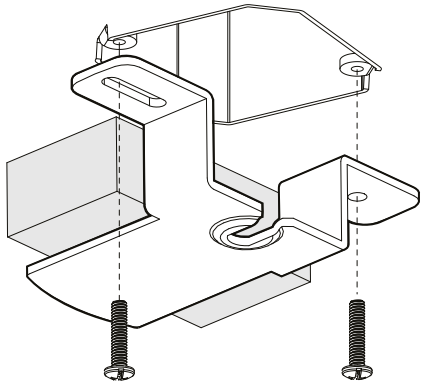


4 Weave power cord from LIGHT ENGINE through all necessary parts based on lamp model.

FIG. 01

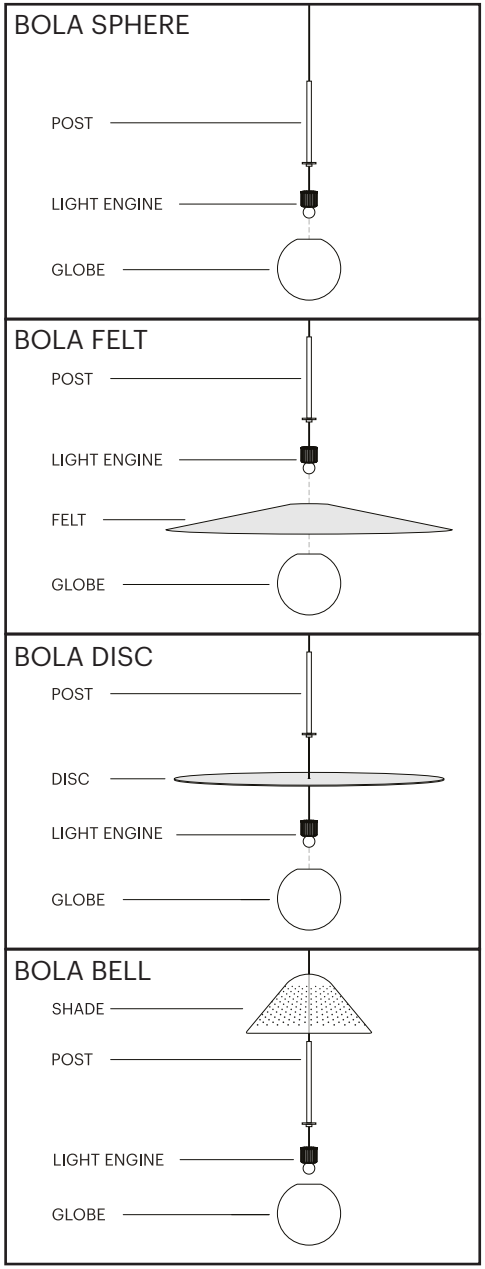


5 THIS STEP IS ONLY FOR BOLA BELL 30, BOLA DISC 32, BOLA FELT 32,42,52. FOR OTHER LAMP VARIANTS, MOVE ON TO STEP 6.

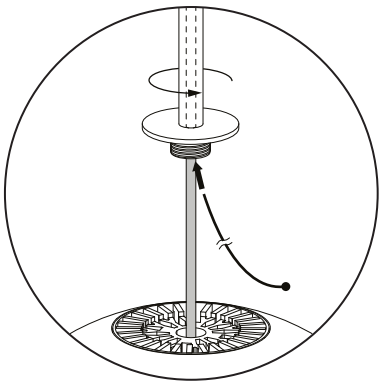


Feed Steel cable (included) through the POST until the crimped ball end bottoms out.


6 Thread POST onto LIGHT ENGINE. (NOTE! For Bola Disc; DISC will be trapped in between POST and LIGHT ENGINE. See FIG. 01).

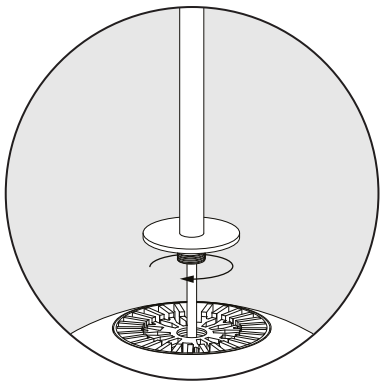

7 Unthread both set screws using included hex tool. Weave cables(s) through CANOPY NUT, CANOPY, AND STRAIN RELIEF.

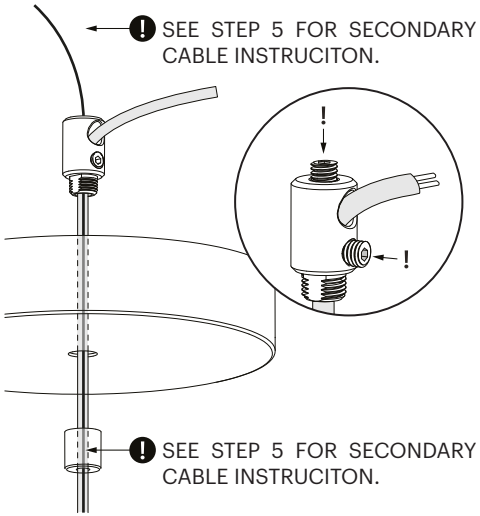

8 Set desired lamp height and secure STRAIN RELIEF A (NOTE: thread both set screws using included hex tool).

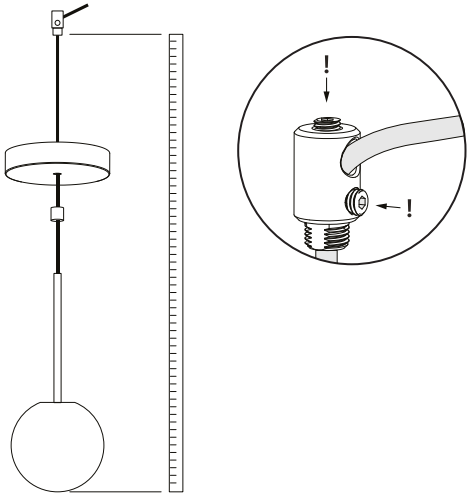

If employing SECONDARY CABLE, add included STRAIN RELIEF B now. Feed cable through both holes and tighten screws as demonstrated in Figure 02.


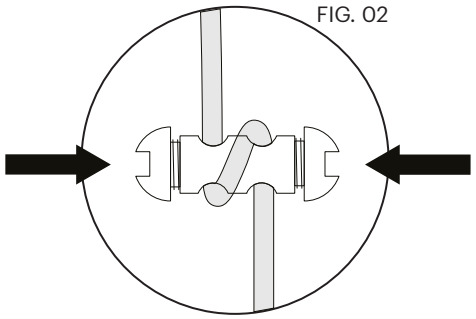



FIG. 02

The location of STRAIN RELIEF B will determine the lamp's hang height.

Pull SECONDARY CABLE down through STRAIN RELIEF A until it stops.

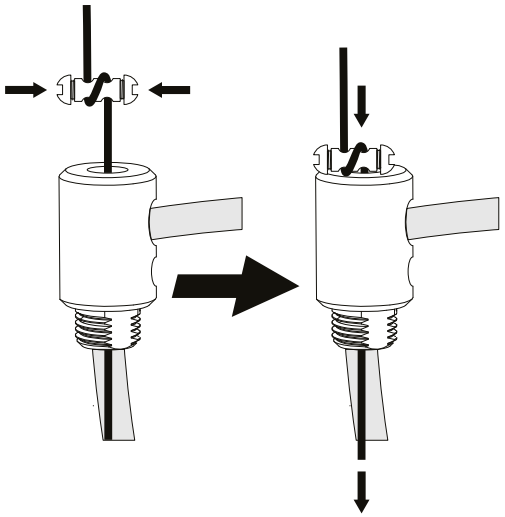

Place assembly onto the BRACKET and adjust the FABRIC POWER CABLE until desired appearance is reached.

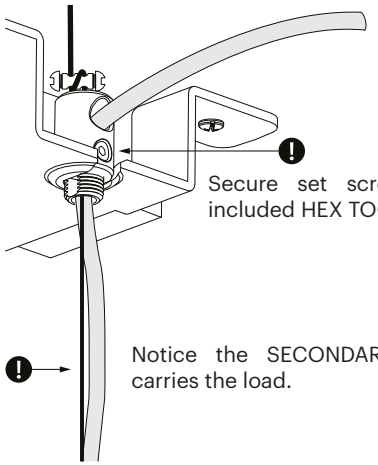

9 Set STRAIN RELIEF A onto MOUNT BRACKET ensuring parts nest properly (see Figure 03).



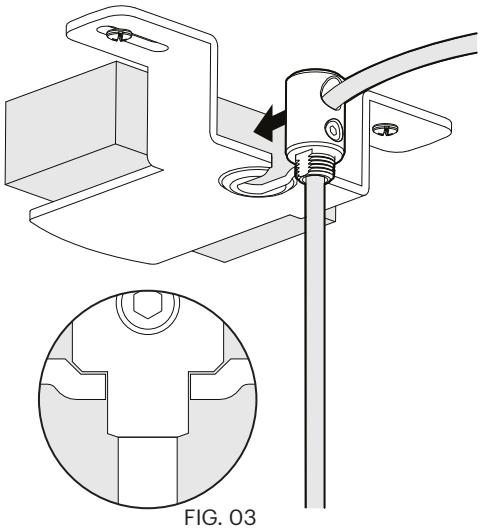


FIG. 03


10 Trim excess cable(s). For the power cable, cut 6" from STRAIN RELIEF A.

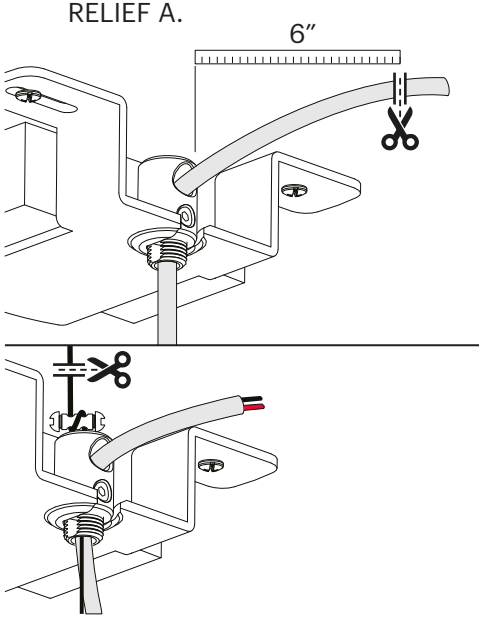

11 Wire DRIVER to BUILDING (black to black/white to white). Wire DRIVER to LAMP (black to blue/red to red). [Pink(-) and purple(+) wires are intended for use in 0-10V dimming installations.]

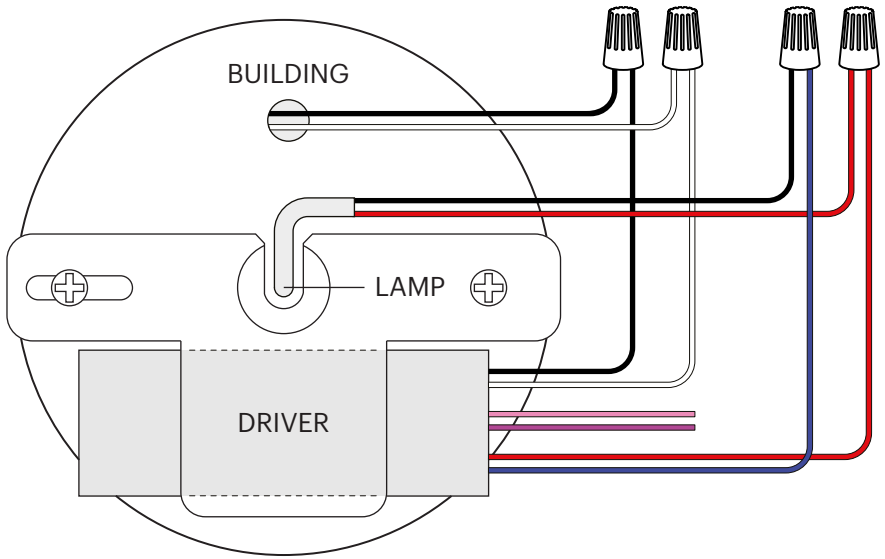

12 Once wiring is complete and lamp has been tested, secure CANOPY COVER with CANOPY NUT.

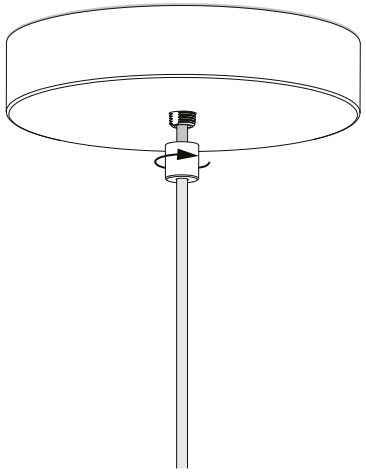

13 Carefully thread GLOBE DIFUSER onto the LIGHT ENGINE. (Note: the FELT SHADE must be placed onto lamp before adding the GLOBE DIFFUSER).

