




WARNING!

Be sure electrical power is OFF before and during installation or maintenance.
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.
All LEDs are included in your lamp. Never touch the LED surface with your bare hands as this may reduce the life of your LED.
Do not alter, relocate or remove any electrical component.

Ref.	/	Light bulb
116	/	1x E-26
269	/	1x E-26
303	/	1x E-26
304	/	1x E-26
1134	/	1x E-26
1140	/	1x E-26
1141	/	1x E-26
1151	/	1x E-26
1180	/	1x E-26
1181	/	1x E-26
1182	/	1x E-26
1183	/	1x E-26
1217	/	1x E-26
1231	/	1x E-26
1233	/	1x E-26
1236	/	1x E-26
1237	/	1x E-26
1239	/	1x E-26
1240	/	1x E-26
1241	/	1x E-26
1242	/	1x E-26
1243	/	1x E-26
1244	/	1x E-26
1250	/	1x E-26
1276	/	1x E-26
1277	/	1x E-26
1280	/	1x E-26
1283	/	1x E-26
1299	/	1x E-26
1310	/	1x E-26
1036	/	1x E-26
1309	/	1x E-26
1363	/	1x E-26
1287	/	1x E-26
1426	/	1x E-26
1427	/	1x E-26
1479	/	1x E-26
1480	/	1x E-26
1476	/	1x E-26
1477	/	1x E-26
1478	/	1x E-26
1481	/	1x E-26
1482	/	1x E-26
1483	/	1x E-26
1484	/	1x E-26
1485	/	1x E-26
1486	/	1x E-26
1487	/	1x E-26
1488	/	1x E-26
1490	/	1x E-26
1493	/	1x E-26
1494	/	1x E-26
1495	/	1x E-26
1496	/	1x E-26
1509	/	1x E-26
1537	/	1x E-26
1546	/	1x E-26
1610	/	1x E-26
1648	/	1x E-26
1655	/	1x E-26
1656	/	1x E-26
1657	/	1x E-26

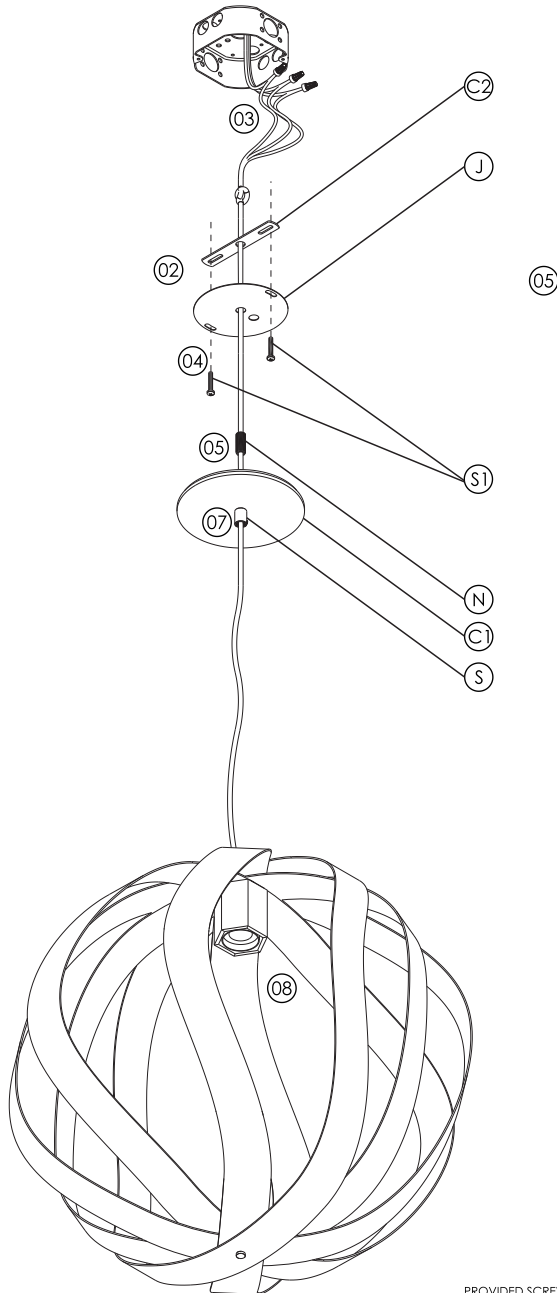

Input Voltage: 120V - 240 V
Input Frequency: 60 Hz

Material: Natural Wood Veneer and MDF
Weight:

Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

- Remove the protecting package from the pieces taking care to not harm any parts with cutting surfaces or objects. Lay the parts of the fixture on some horizontal surface in order to connect them, if needed use the protecting package to soften the surface and protect the parts from getting scratched or harmed.

MAKING ELECTRICAL CONNECTIONS

- Pass the energy cable through the strain relief (S) fixed in the canopy (C1), through the nipple (N), junction box cover (J) and crossbar (C2).
- Make the electrical connections in accordance with all applicable local codes.
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.
- Screw the crossbar (C2) and junction box cover (J) in the junction box using the provided screws (S1).
- Once the crossbar and junction box cover are fixed in the ceiling, screw the nipple (N) on it and insert the excess energy cable into the junction box through the strain relief (S).
- Once the nipple is fixed on the junction box, screw the strain relief (S) on the nipple until the canopy is fixed and tight against the ceiling.
- Adjust the height of the pendant and fasten the strain relief screw to lock the energy cable.
- Install an UL Listed E-26 lightbulb (not included) taking care to not exceed the recommended wattage rating of 25W.

Turn on the energy power, your luminaire is ready for use.

PROVIDED SCREWS



ATTENTION!

FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.
It's recommended to read these instructions completely and carefully before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsibility of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual. The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation. See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.



WARNING!

Be sure electrical power is OFF before and during installation or maintenance.
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.
All LEDs are included in your lamp. Never touch the LED surface with your bare hands as this may reduce the life of your LED.
Do not alter, relocate or remove any electrical component.

REF / Ligh bulb
1189 / 1x E-26
1190 / 1x E-26

Color Temperature: Lamp dependent
CRI: Lamp dependent
Luminous Flux: Lamp dependent
Total Power: Lamp dependent

Input Voltage: 127V - 240V
Input Frequency: 60 Hz

Material: Natural Wood Veneer, MDF and Acrylic
Weight:

Turn off the electrical power before starting the installation, and keep it turned off until the installation is completed.



This assembly may require the work of two people so it can be secure and well executed.

INSTALLING THE LUMINAIRE

- ① First, remove the finishing screws (S2) at the base, to have access to the socket.
- ② Install an UL Listed E26 LED bulb on the sockets, with a Max 25W wattage.
- ③ Pass the power supply cable through the strain relief (S), threaded tube nipple (N), canopy (C), junction box cover (J) and crossbar (CB). Adjust the cable length so it is equivalent to the desired height for the luminaire to be installed.
- ④ Make the electrical connections in compliance with all the safety standards and local electrical codes.
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.
- ⑤ Using the (S1) screws, fixate the crossbar into the junction box.
- ⑥ Fixate the threaded nipple into the crossbar through the center hole of the canopy. Bring the canopy close to the junction box, fitting the nipple in its center hole. Using the strain relief, fixate them into the nipple. Once it's secure, tighten the screw on the strain relief to anchor the power cord.

Turn on the electrical power.

The luminaire is ready for use.

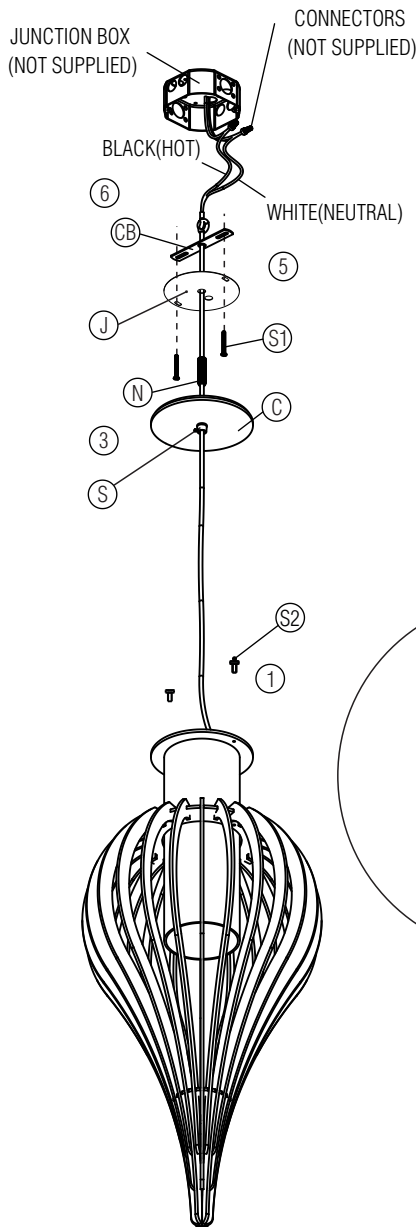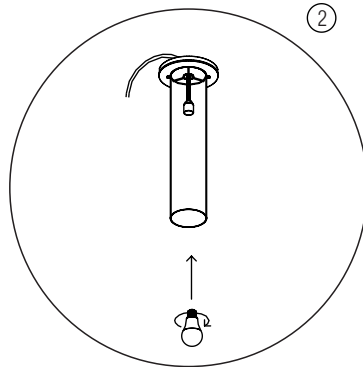

PROVIDED
SCREWS



ATTENTION!

FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.
It is recommended to read these instructions completely and carefully before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsibility of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual.
The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.
See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.