




FRONT

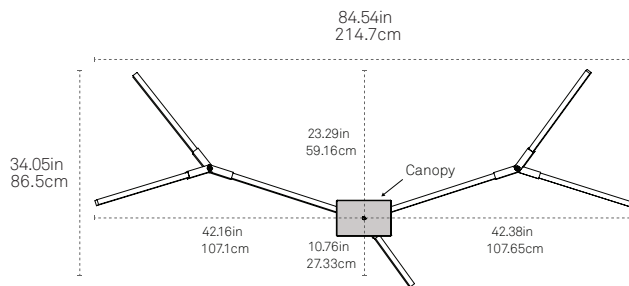

PLAN

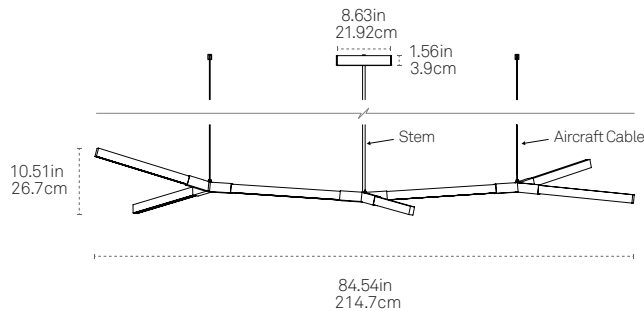

SIDE

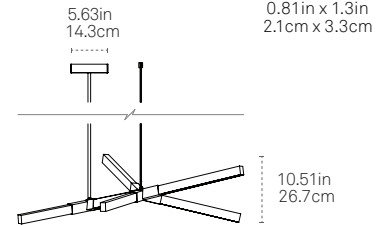

□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

SPECIFY PRODUCT OPTIONS:

MODEL

LIT-BRCH-BOUGH

WOOD

☐ ☐

METAL

☐ ☐

COLOR TEMP

☐ ☐ ☐ ☐

DRIVER

☐ ☐ ☐

OUTPUT

☐ ☐

STEM

☐ ☐ ☐

CEILING

☐

DESIGN

© 2023

PATENTS

U.S. Patent #D860510

MATERIALS

LED, Sustainably Sourced or
Reclaimed Wood, Steel

FEATURES

Fully Dimmable
1 x 60-inch drop stem and
2 x adjustable aircraft cables included

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

10.7 lbs / 4.85 kg

SHIPPING DIMENSIONS

Ships flat-packed in one box
62 in x 7 in x 11 in
12 lbs / 5.4 kg

LIGHT SPECIFICATION

Standard Brightness LEDs :
620 Lumens / 94 CRI (3000K) /
20W Power draw

High Brightness LEDs :

1137 Lumens / 90 CRI (3000K) /
40W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM I FINISH

Blackened

B L

Brushed Nickel

B N

Brushed Brass

B B

PREMIUM II FINISH

Polished Nickel

P N

Polished Brass

P B

* Custom options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V (2-wire+G Forward phase 1% dimming)

1 2 0

120V-277V (3-wire+G 1% dimming)

2 7 7

120V-277V (Universal dimming including 0-10V)**

0 1 0

** Recommended for European orders

LIGHT OUTPUT

Standard Brightness - 12V (Dimmable)

S B

High Brightness - 24V (Dimmable)

H B

STEM LENGTH*

60" length of 3/8" rigid steel stem

0 6 0

120" length of 3/8" rigid steel stem

1 2 0

180" length of 3/8" rigid steel stem

1 8 0

* Drop stem can be cut to length on site. 60" is included;
contact a sales representative for 120" and 180" pricing.

CEILING

Flat Ceiling

F

Sloped Ceiling**

S

** Canopy Dimension : 11.75"(L) x 5.5"(W) x 1.5"(H)




1 2 0

120V driver (2-wire+G Forward phase 1% dimming)

Full manufacturer's specification sheets can be found at
stickbulb.com/drivers/120

Compatible Controls: Lutron Neutral-wire Dimmers

For assistance selecting controls contact Lutron at 1.877.346.5338 or LEDs@lutron.com



| Product | Part Number | Low-End Setting/Load-Type Setting ¹ | Drivers per Control | | |
|---|---------------------|---|---------------------|-----------------|-------------------|
| | | | A: Not Ganged | B: End of Gang | C: Middle of Gang |
| RadioRA 2 adaptive dimmer | RRD-6NA- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| RA2 Select/RadioRA 2 600 W dimmer | RRD-6ND | Hi-lume 1% 2-Wire LTE LED ² | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| RadioRA 2 1000 W dimmer | RRD-10ND- | Set Device type to "INC/MLV Neutral Dimmer"; Set High-End Trim to 99%; Set Low-End Trim to 35% | 1-13 | 1-13 | 1-13 |
| RadioRA 2 Architectural RF GRAFIK T phase selectable dimmer | RRT-G5NEW- | Trim low-end per APM App Note (Lutron P/N 048534) | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| RadioRA 2 Architectural RF GRAFIK T dimmer | RRT-G25LW- | Trim low-end per APM App Note (Lutron P/N 048534) | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| RadioRA 2 C•L hybrid seeTouch keypad | RRD-HN | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 200 W max | 1-10, 200 W max | 1-10, 200 W max |
| RadioRA 2 GRAFIK T C•L hybrid keypad | RRT-GH | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS adaptive dimmer | HQRD-6NA- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS 600 W dimmer | HQRD-6ND- | Hi-lume 1% 2-Wire LTE LED ² | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| HomeWorks QS 1000 W dimmer | HQRD-10ND- | Hi-lume 1% 2-Wire LTE LED ² | 1-13 | 1-13 | 1-13 |
| Maestro Wireless 600 W dimmer | MRF2-6ND-120- | Trim low-end per APM App Note (Lutron P/N 048370) | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| Vive Maestro Wireless 600 W dimmer | MRF2S-6ND-120- | Trim low-end per APM App Note (Lutron P/N 048370) | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| HomeWorks QS GRAFIK T hybrid keypad | HQRT-GH | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS Architectural GRAFIK T dimmer | HQRT-G25LW- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS Architectural GRAFIK T phase selectable dimmer | HQRT-G5NEW- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS designer C•L hybrid seeTouch keypad | HQRD-HN | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 200 W max | 1-10, 200 W max | 1-10, 200 W max |
| GRAFIK T C•L 250 W dimmer | GT-250M-, GTJ-250M- | Set low-end trim per dimmer installation instructions | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| Caséta Wireless Pro 1000 W dimmer | PD-10NXD- | Trim low-end per instructions at casetawireless.com/lowend | 1-13 | 1-13 | 1-13 |
| Caséta Wireless phase selectable dimmer | PD-5NE- | Trim low-end per instructions at casetawireless.com/lowend | 1-20, 400 W max | 1-20, 400 W max | 1-20, 400 W max |

¹ Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.

² Also listed as "LED Lutron A-Series 2-Wire" or "Hi-lume A-Series LTE LED Driver 2-Wire" in previous software releases.

(TO BE CONTINUED ON NEXT PAGE)

(CONTINUED from

| | | |
|---|---|---|
| 1 | 2 | 0 |
|---|---|---|

)**Compatible Controls: Lutron Non-Neutral Dimmers**

For assistance selecting controls contact Lutron at 1.877.346.5338 or LEDs@lutron.com

| Product | Part Number | Divers per Control | Low-End Setting/Load-Type Setting ¹ | | |
|--|---------------------------------|---|--|-----------------|-----------------|
| Ariadni C•L 250 W dimmer | AYCL-253P- | Set low-end trim dial to 1 o'clock. Adjust slightly if needed. | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| Ariadni C•L 150 W dimmer | TGCL-153P-, AYCL-153P- | Set low-end trim dial to 1 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Diva C•L 250 W dimmer | DVCL-253P-, DVSCCL-253P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| Diva C•L 150 W dimmer | DVCL-153P-, DVSCCL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Nova T ₈ C•L 250 W dimmer | NTCL-250- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| Lumea C•L 150 W dimmer | LECL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Sylark C•L 150 W dimmer | SCL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Contour C•L 150 W dimmer | CTCL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| myRoom DIN power module | MQSE-4A1-D | 1-6 (per output); 1 A maximum driver input current | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks QS DIN power module | LQSE-4A1-D | 1-6 (per output); 1 A maximum driver input current | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks QS Phase Adaptive DIN power module | LQSE-4A-120-D | 1-6 (per output); 2 A maximum driver input current | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks QS wallbox power module | HQRJ-WPM-6D-120 | 2-10 (per output); 26 total per module | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks wallbox power module | HWI-WPM-6D-120 | 2-10 (per output); 26 total per module | Set load type to "GRX-FDBI or GRX-TVI" | | |
| GRAFIK Eye QS control unit | QSGR-, QSGRJ- | 2-10 (per output); 26 total per unit | Set load type to "Fluorescent Module" | | |
| GRAFIK Eye 3000 control unit | GRX-3100-, GRX-3500- | 2-10 (per output); 26 total per module | Set load type to "GRX-FDBI" or "GRX-TVI" | | |
| RPM-4U module (LCP, HomeWorks QS, GRAFIK Systems, Quantum) | HW-RPM-4U-120, LP-RPM-4U-120 | 2-26 (per output); 26 total per module | Hi-lume 1% 2-Wire LTE LED ² | | |
| | | | Set load type to "2-1" | | |
| RPM-4A module (LCP, HomeWorks QS, GRAFIK Systems, Quantum) | HW-RPM-4A-120, LP-RPM-4A-120 | 1-13 (per output); 26 total per module | Hi-lume 1% 2-Wire LTE LED ² | | |
| | | | Set load type to "2-1" | | |
| GP dimming panels | Various | 1-26 | Set load type to "2-1" | | |

¹ Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.² Also listed as "LED Lutron A-Series 2-Wire" or "Hi-lume A-Series LTE LED Driver 2-Wire" in previous software releases.

DIMMING COMPATIBILITY

Lutron Hi-Lume 1% EcoSystem/3-Wire L3D

Featuring SoftOn/FadeToBlack

Standard & High Brightness

2 7 7

120-277V driver (3-wire+G 1% dimming)

Full manufacturer's specification sheets can be found at

stickbulb.com/drivers/277

Compatible Controls

For assistance selecting controls, contact Lutron at 1.877.346.5338 or LEDs@lutron.com

| Product | Part Number | | Drivers per Control | | | | Measured Light Output Range |
|--------------------------------------|------------------------|-----------------|-----------------------------------|---------|-------------|---------|-----------------------------|
| | | | 40 W Driver | | 50 W Driver | | |
| | 120 V ~ | 277 V ~ | 120 V ~ | 277 V ~ | 120 V ~ | 277 V ~ | |
| 3-wire Controls: | | | | | | | |
| Nova T | NTF-10- | NTF-10-277- | 1-41 | 1-44 | 1-31 | 1-36 | 100%-1% |
| | NTF-103P- | NTF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Nova | NF-10- | NF-10-277- | 1-41 | 1-44 | 1-31 | 1-36 | 100%-1% |
| | NF-103P- | NF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Skylark | SF-10P- | SF-12P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| | SF-103P- | SF-12P-277-3 | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Diva | DVF-103P- | DVF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| | DVSCF-103P- | DVSCF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Ariadni | AYF-103P- | AYF-103P-277- | 1-20 | 1-44 | 1-15 | 1-27 | 100%-1% |
| Maestro | MAF-6AM- | MAF-6AM-277- | 1-15 | 1-20 | 1-11 | 1-20 | 100%-1% |
| | MSCF-6AM- | MSCF-6AM-277- | 1-15 | 1-20 | 1-11 | 1-20 | 100%-1% |
| Maestro Wireless | MRF2-F6AN-DV- | | 1-15 | 1-33 | 1-11 | 1-27 | 100%-1% |
| RadioRA 2 | RRD-F6AN-DV- | | 1-15 | 1-33 | 1-11 | 1-27 | 100%-1% |
| HomeWorks QS | HQRD-F6AN-DV | | 1-15 | 1-33 | 1-11 | 1-27 | 100%-1% |
| Interfaces ¹ | PHPM-3F-120 | – | 1-41 | – | 1-31 | – | 100%-1% |
| | PHPM-3F-DV | | 1-41 | 1-88 | 1-31 | 1-72 | 100%-1% |
| GP Dimming Panels | Various | | 1-41 | 1-88 | 1-31 | 1-72 | 100%-1% |
| EcoSystem Controls: | | | | | | | |
| PowPak dimming module with EcoSystem | RMJ-ECO32-DV-B | | 32 per EcoSystem link | | | | 100%-1% |
| | FCJ-ECO | | 3 per EcoSystem link ² | | | | 100%-1% |
| Energi Savr Node with EcoSystem | QSN-1ECO-S, QSN-2ECO-S | | 64 per EcoSystem link | | | | 100%-1% |
| GRAFIK Eye QS with EcoSystem | QSGRJ-_E, QSGR-_E | – | 64 per EcoSystem link | | | | 100%-1% |
| Quantum | Various | | 64 per EcoSystem link | | | | 100%-1% |

¹ For use with 3-wire controls or Commercial Systems, RadioRA 2 Systems or Home Systems applications.² Up to 3 drivers controlled as a single zone (broadcast EcoSystem).

0 1 0

120V-277V driver (Universal dimming including 0–10V)

Full manufacturer's specification sheets can be found at
stickbulb.com/drivers/010

Low-Voltage Compatible Dimmer brands: Crestron, Lutron, Leviton

For assistance selecting controls, contact LTF at +1 (847) 498-5832 or LTFsales@LTFtechnology.com

| Brand | Part number | Brand | Part number | Brand | Part number |
|----------|---------------|--------|----------------|---------|-------------|
| Crestron | CLS-C6 | Lutron | DVCL-153P | Leviton | Model 6615 |
| Crestron | CLS-C6M | Lutron | DVELV-303P | Leviton | Model 6672 |
| Crestron | CLS-C6EX | Lutron | HQRD-6A | Leviton | Model 6674 |
| Crestron | CLS-C6MEX | Lutron | HQRD-6NA- | Leviton | Model IPL06 |
| Crestron | CLS-EXP-DIM | Lutron | NTELV-300- | Leviton | Model IPE04 |
| Crestron | CLS-EXP-DIMU | Lutron | NTELV-600- | Leviton | Model IPI06 |
| Crestron | CLX-2DIM8 | Lutron | NVELV-600- | Leviton | Model VP106 |
| Crestron | DIN-1DIM4 | Lutron | VTELV-600M | Leviton | Model VPE04 |
| Crestron | DIN-1DIMU4 | Lutron | MAELV-600- | Leviton | Model VPM06 |
| Crestron | CLW-DIMEX-E | Lutron | MSCELV-600M | Leviton | Model VRE04 |
| Crestron | CLW-DIMEX-P | Lutron | MIRELV-600- | Leviton | Model VRM10 |
| Crestron | CLW-DIMSWEX-E | Lutron | MRF2-6ELV-120- | | |
| Crestron | CLW-DIMSWEX-P | Lutron | SELV-300P | | |
| Crestron | GLX-DIM6 | Lutron | CTELV-303P | | |
| Crestron | GLXX-2DIM8 | Lutron | SELV-600- | | |
| Crestron | P-DIMEX | | | | |
| Crestron | CLW-DELVEX-E | | | | |
| Crestron | CLW-DELVEX-P | | | | |

All of our wood and metal products should be dusted by hand with a dry Swiffer pad (or equivalent) on a regular schedule to maintain surface integrity. It is imperative that none of our products come into contact with bleach, vinegar, lemon juice or any household product which may contain these or other solvents.

If any part of one of our fixtures becomes soiled with dried residue or grime, wipe the affected area with a soft cloth dampened very lightly with warm water and immediately wipe dry with another soft cloth. If this does not complete the task, wipe with a cloth soaked in diluted mild liquid dish soap and again immediately dry.

Fingerprints on our Nickel-plated, Brass-plated, and Blackened metal hardware can be removed with a clean, dry, soft cloth. We recommend an ultra-fine, textureless microfiber cleaning cloth (as one uses to clean glass).

All of our Brass hardware is treated with a protective coating to prevent tarnish. It should need no more than a wipe with a clean, dry, soft cloth to remove fingerprints and dust.

Brushed metal surfaces should be buffed in the direction of the grain.

For scratches in wood we highly recommend Claphams beeswax, which is non-toxic and can be applied by hand. Rub a small amount into the scratch area and buff with a dry cloth.