

DASH SMALL & MEDIUM PENDANTS

TP1261; TP1251

General Product Information



Intertek

SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



INTEGRATED LED NO BULBS REQUIRED



DIMMABLE (LED, ELV, TRIAC & 10V)



ADAPTABLE TO SLOPED CEILINGS



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



MEASURING TAPE




WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

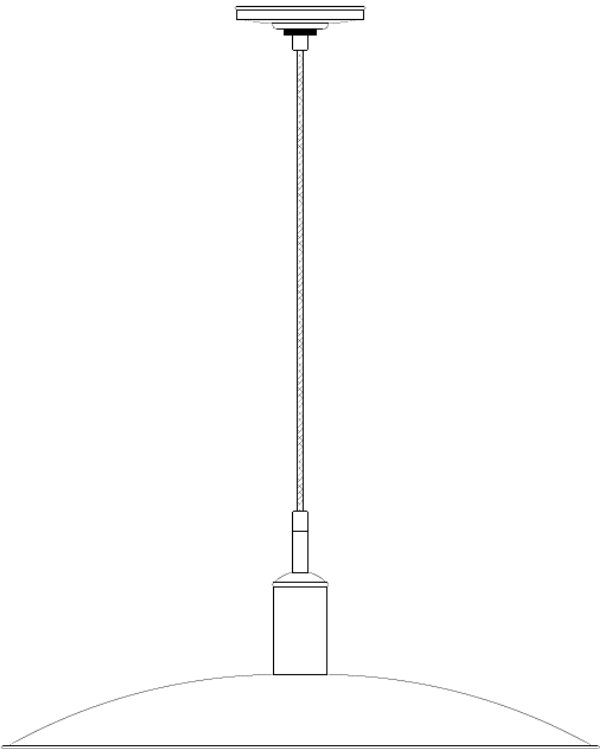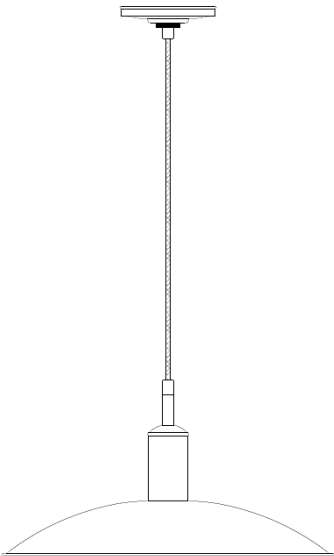

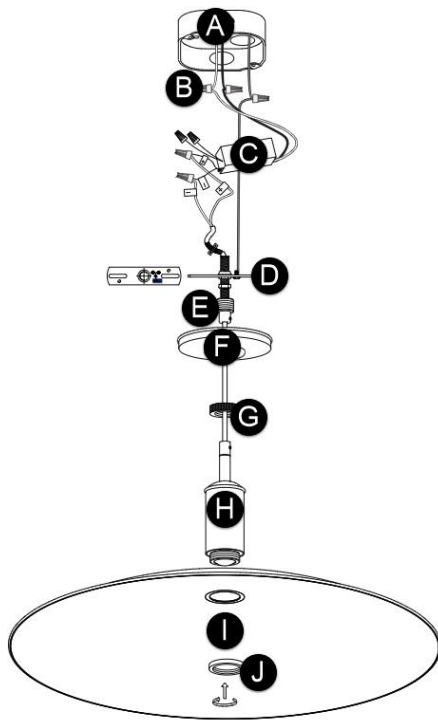

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Bar with Threaded Rod & Mounting Screws (Not Illustrated)
- E. Screw Collar
- F. Canopy
- G. Collar Nut
- H. Fixture
- I. Fixture Shade
- J. Shade Collar

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the pendant.
2. Do the following to determine the ideal cord height for the pendant:
(Tip: Measure the distance from the bottom of the fixture to the top of the canopy, then subtract the ceiling height from that measurement; this will provide the necessary cord length needed to hang the pendant at the correct height.)
 - a) Locate the slot screw on the primary strain relief of the pendant cord. Loosen (do not remove) the slot screw. Once removed, it is difficult to put back into place and easily lost.
 - b) Adjust the cord height by moving the cord up or down the primary strain relief. Determine, measure, and mark the cord length.
 - c) Cut the cord at the marked location to suit aesthetic needs.
3. Feed the fixture cord through the primary strain relief with collar nut, screw collar, canopy, threaded rod with attached mounting bar, and secondary strain relief. Then tighten the screws on the primary and secondary strain relief.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Ensuring the driver output wires are accessible, secure the mounting bar to the junction box using the mounting screws.
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black (negative) driver wire (output) to (negative) fixture wire
 - b) Red (positive) driver wire (output) to (positive) fixture wire
6. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
7. Carefully tuck all the wires behind the mounting plate into the junction box.
8. Place the canopy over the mounting plate and secure it in place by screwing the collar nut tightly onto it.

III. Installing the Fixture

1. Install the fixture shade to the fixture and secure it in place with the shade collar.