


CIRCUS oval S1900 v2 1-10V 100-277V


ver. 20200404_Rev_1

year: **2023**
code: **2730381S20100**
type: **hanging lamp**
application: **indoor**

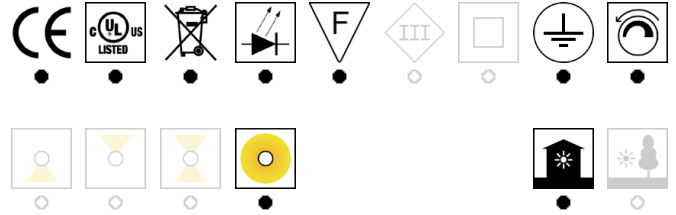

Technical drawing

Size ref. image mm - inch

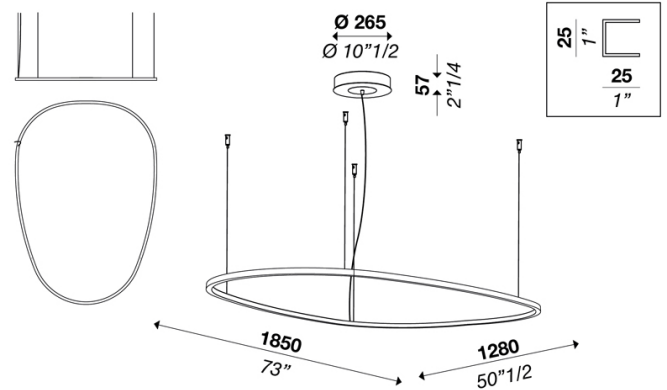

| Technical data | |
|--|--------------------------|
| Light source | LED |
| Circuit structure | LED strip |
| Light emission direction | diffused |
| Power | 135 W |
| Source lumens | 16900 lm |
| Source efficacy | 125 lm/W |
| Energy class | E |
| Delivered lumens | 11703 lm |
| Secondary | 24 V |
| Colour temperature | 3000 K / variants page 2 |
| Colour rendering index | 90 CRI / variants page 2 |
| Standard Deviation of Colour Matching | 3 SDCM |
| Safety class | I |
| Degree of protection | IP 20 |
| Direct mounting on normally flammable surfaces | ● |
| Operating temperature | +10° / +40° |
| CE | ● |
| UL | ● |

| Optional | |
|----------------|---|
| Emergency mode | ○ |
| Motion sensor | ○ |
| Directional | ○ |

| Packing | |
|-------------|--|
| Net weight | |
| Packaging 1 | |
| Packaging 2 | |
| Packaging 3 | |
| Packaging 4 | |
| Packaging 5 | |

| Structure | |
|---------------|---------------------------------|
| Material | |
| Finish | white / variants page 2 |
| Diffuser | |
| Material | polycarbonate |
| Finish | opal / variants page 2 |
| Canopy | |
| Size | 265 mm - 10" 1/2 inch |
| Height | 57 mm - 2" 1/4 inch |
| Ceiling mount | perpendicular / variants page 2 |

| Electronics / Driver | |
|----------------------|-------------------|
| Included | Yes |
| Quantity | 2 |
| Voltage | 100-277V 50/60 Hz |

| Dimmable | |
|-----------|---|
| ON/OFF | ○ |
| PUSH | ○ |
| 0-10V | ○ |
| 1-10V | ● |
| CUT PHASE | ○ |
| Bluetooth | ○ |
| DALI | ○ |

| Hanging cables | |
|---|-------------------|
| Stainless steel cables standard length (custom available) | 2000 mm / 78" 3/4 |
| Electric cable standard length (custom available) | 2500 mm/100" |

| Warranty | |
|----------|---------|
| Duration | 2 years |

CIRCUS oval S1900 v2 1-10V 100-277V

ver. 20200404_Rev_1

year: **2023**

code: **2730381S20100**

type: **hanging lamp**

application: **indoor**

Available variants

Colour temperature

2700 k



3000 k



3500 k



4000 k



custom



Colour rendering index

CRI 80



CRI 90



CRI 95



custom



Structure finish

gold / brass



matt white



matt black



embossed white



embossed black



custom



Diffuser / Optical

opal



transparent



transparent
prismatic



satin



custom



Ceiling Mount

direct



perpendicular



conical



remote driver



custom

