

LUNA C1250 0-10V 110V

ver. 20200404_Rev_0


year: **2022**
code: **2670211A20100**
type: **ceiling lamp**
application: **indoor**




Technical data	
Light source	LED
Circuit structure	LED strip
Light emission direction	direct
Power	78 W
Source lumens	8892 lm
Source efficacy	114 lm/W
Energy class	F
Delivered lumens	6990 lm
Secondary	24 V
Colour temperature	3000 K / variants page 2
Colour rendering index	90 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	●

Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing	
Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

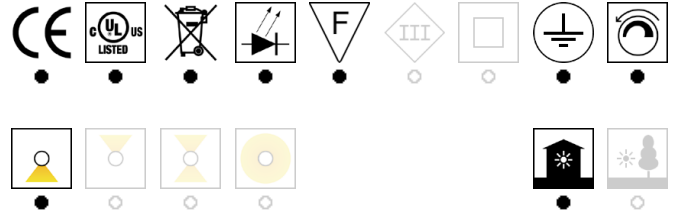

Technical drawing
Size ref. image mm - inch

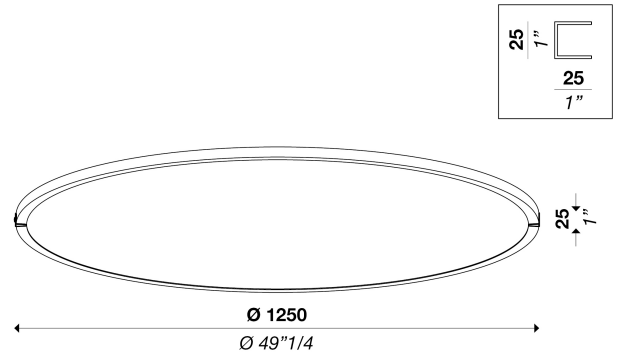

Structure	
Material	aluminium
Finish	white / variants page 2

Diffuser	
Material	polymer stretch
Finish	opal / variants page 2

Electronics / Driver	
Included	Yes
Quantity	1
Voltage	100-120V 60 Hz

Dimmable	
ON/OFF	○
PUSH	○
0-10V	●
1-10V	○
CUT PHASE	○
Bluetooth	○
DALI	○

Hanging cables	
Stainless steel cables standard length (custom available)	-
Electric cable standard length (custom available)	-

Warranty	
Duration	2 years

LUNA C1250 0-10V 110V

ver. 20200404_Rev_0

year: **2022**

code: **2670211A20100**

type: **ceiling lamp**

application: **indoor**

Available variants

Colour temperature

2700 k



3000 k



3500 k



4000 k



custom



Colour rendering index

CRI 80



CRI 90



CRI 95



custom



Structure finish

gold / brass



matt white



matt black



embossed white



embossed black



custom



Diffuser / Optical

opal



custom



Ceiling Mount

remote driver



custom

