


ASSEMBLY INSTRUCTION

RIATA SMALL PENDANT

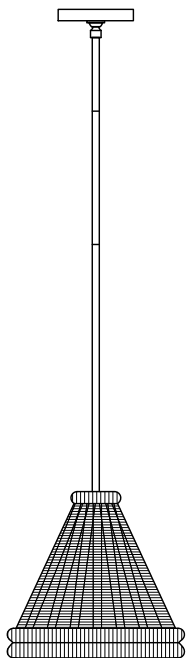


This page lists the contents included in the box. Please take time to identify the hardware as well as the individual components of the product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Please follow the assembly instructions closely. Improper assembly can result in personal or property damage.

IMPORTANT SAFETY INSTRUCTIONS:

If you are unsure about what mounting method you should use, consult a qualified professional or your local hardware store.

We recommend installation of this lamp be performed by a licensed electrician.



COMPONENT LIST :

Part	Picture	Description	Qty
A		Mounting Plate	1
B		Mounting Screw M4 x 25	2
C		Wire nuts	3
D		Canopy	1
E		Hang Straight connector	1
F		Stem (Ø12mm x 6")	2
G		Stem (Ø12mm x 12")	2
H		Stem (Ø12mm x 18")	2
I		9W MAX type G25 LED bulb	1
J		Assembly lamp	1

Please clean with a soft, dry cloth ONLY!
Do not use cleansers.

ASSEMBLY INSTRUCTION

RIATA SMALL PENDANT




We recommend disassembly/assembly of this lamp be performed by a licensed electrician.

This lamp has height options that can be created by adding/removing sections of the downrod.

Please note that in order to reduce the height, the wire will need to be cut in order to remove the chosen length of downrod.

Cutting the wire must be done by a qualified professional, and will void the warranty of the lamp.

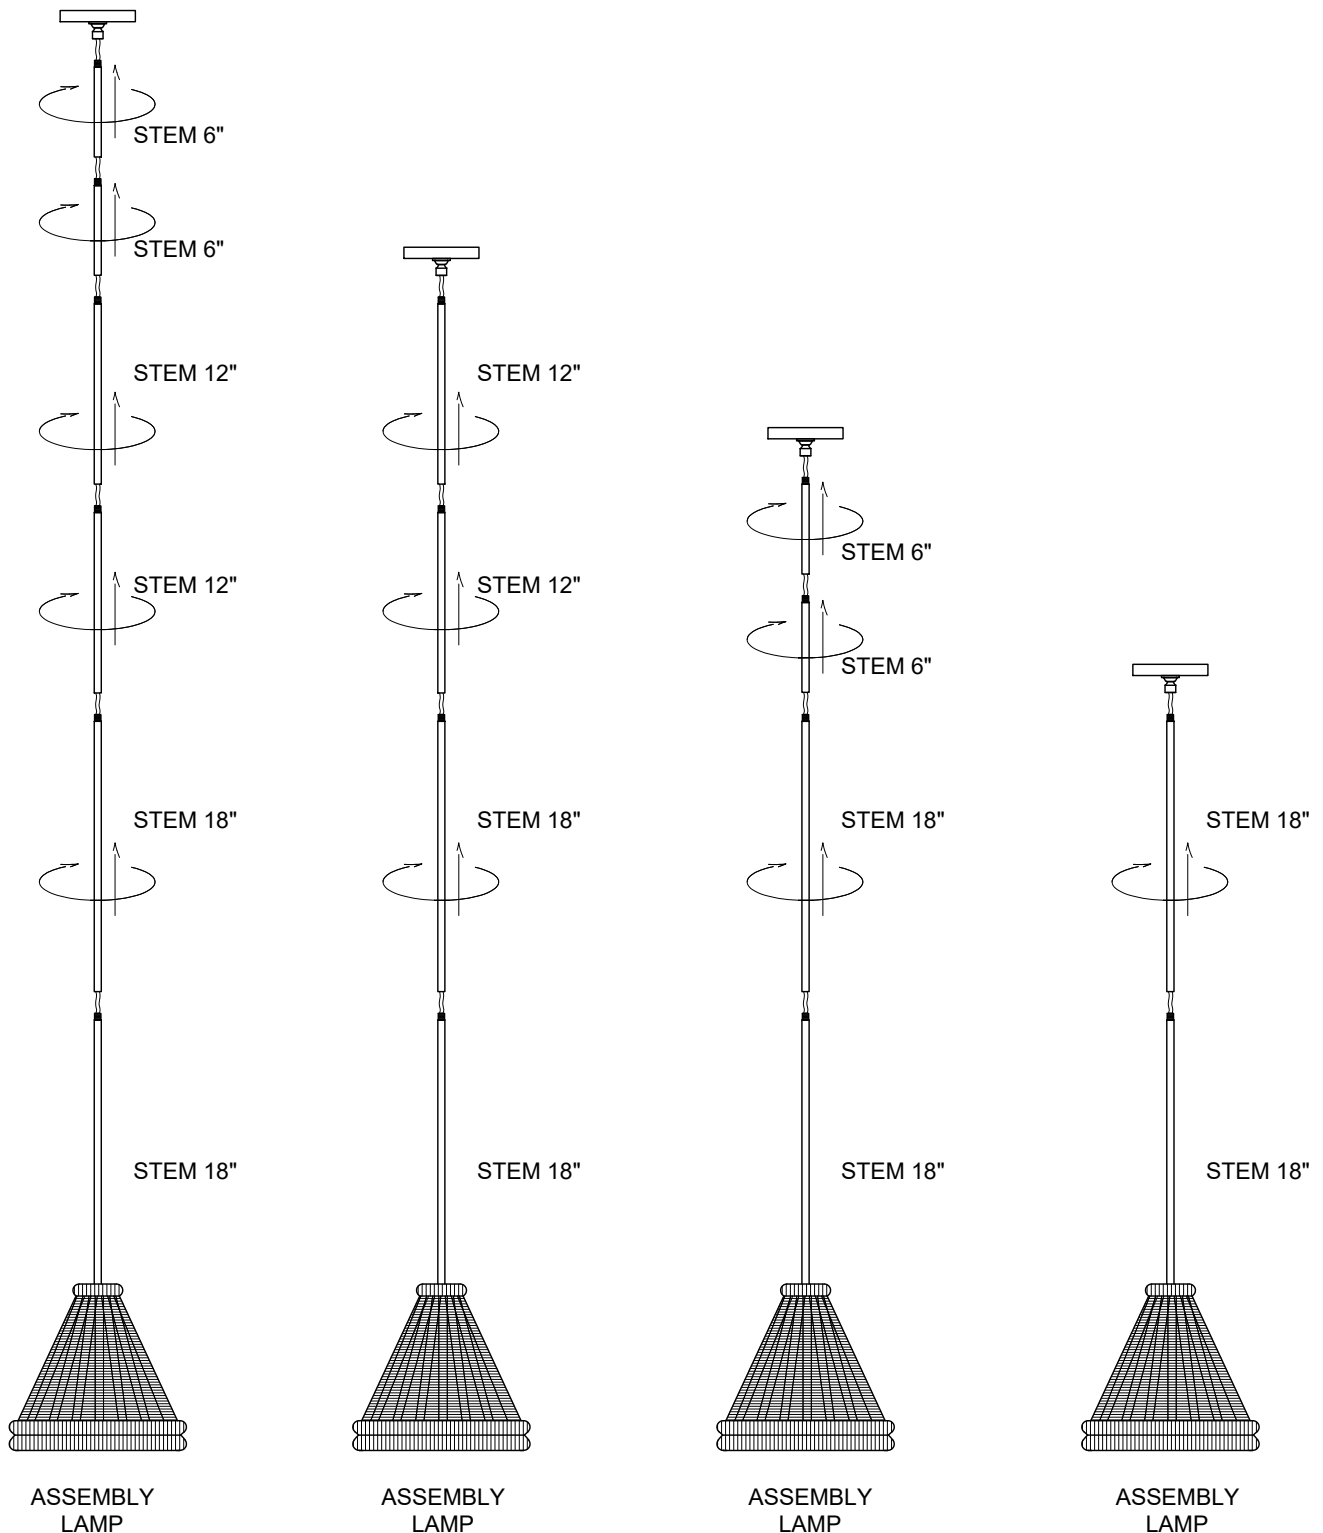

ASSEMBLY INSTRUCTION

RIATA SMALL PENDANT

GENERAL

1. To ensure the success of the fixture installation, the following instructions and diagram(s) should be read and understood.
2. All electrical connections must be made in accordance with the National Electric code and local codes and ordinances. If you are uncertain of the methods of installing electrical wiring and lighting fixtures secure the services of a qualified licensed electrician.

TOOLS NEEDED

Blade screwdriver, Phillips driver, slip joint pliers or small adjustable wrench, wire cutter/stripper, electrical current tester, stepladder, and electrical tape.

FIXTURE INSTALLATION

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
3. Feed wires from assembly lamp through stems, hang straight connector, canopy and mounting plate. Attach stem by turning clockwise. Attach the hang straight connector connector to the downrod by turning the lower part of the connector clockwise.
4. Gently pull wiring down from ceiling junction box and allow it to hang. Carefully inspect the pendant's fixture wires:
 - **Neutral fixture wire (usually white)**
 - **Hot fixture wire (usually black)**
 - **Grounding wire (usually green)**
5. Wrap the ground fixture wire of the lamp assembly around the ground screw on the mounting plate and secure the screw. Attach the remaining ground wire from the lamp assembly to the junction box ground wire (usually green) with a wire nut, and wrap the connection with electrical tape.
6. Attach the neutral fixture wire from the lamp assembly to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
7. Attach the hot fixture wire from the lamp assembly to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

8. Gently tuck wire connections into the junction box. Place the mounting plate over the center of the ceiling junction box. Align holes in mounting plate with holes in junction box and attach with 2 mounting screws.
9. Push canopy up over mounting plate, aligning threaded rod to hole of canopy, until it is flush with the ceiling. Secure the canopy by turning the upper part of hang straight connector counterclockwise. Tighten the canopy attachment by turning the canopy ring counterclockwise.
10. Insert 1 bulb into the socket.

DO NOT EXCEED SPECIFIED WATTAGE.

Restore power to junction box and test fixture. Installation is now complete.

