
# Installing your SCHWUNG Vesta Flex

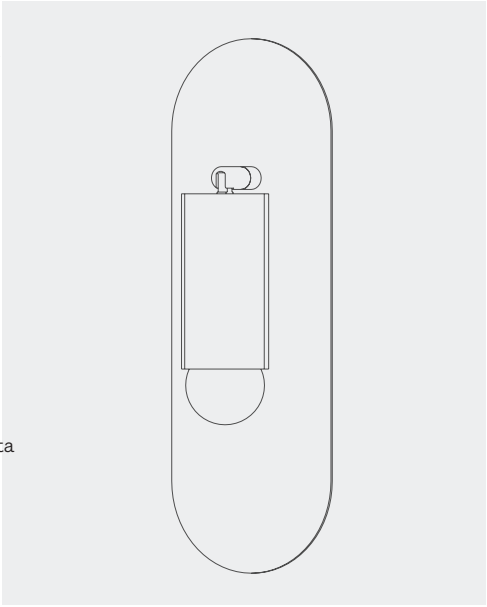

Collection

Vesta

Our goal is to bring energy, warmth and pleasure into your personal space. It’s great to be here.

Safety instructions 6

Components and features 8

Assembly instructions 9

Cleaning and maintenance 13

Troubleshooting 14

# Safety instructions



**We recommend installation by a licensed electrician.**

**Safety instructions**
These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

1. Turn off electricity at the main circuit breaker panel before beginning installation.
2. We highly recommend that the direct wire fixture shall be installed by a certified and licensed electrician. The customer should not attempt to install.
3. This fixture has been rated for up to 1 (C) 10W max E12 base bulb. To avoid the risk of fire, do not exceed the recommended wattage.
4. If any special control devices are used with this fixture, follow the instructions to assure full compliance with the N.E.C. requirements.
5. This fixture should only be used with a trailing edge dimmer.
6. Mounting hooks and wall anchors are not included. To select the proper type of mounting hook /wall anchor for your wall/ceiling please contact your local hardware store for assistance. If you have any questions, contact a licensed electrical contractor.

**Warnings**

- Do not mount or unmount the glass cylinders if the fixture or light bulbs are hot.
- All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
- Do not use if the light cable/cord is damaged.
- To reduce the risk of fire, electrical shock or personal injury, always turn off the light fixture and allow it and the globes to cool prior to replacing light bulb.
- When mounting the fixture, always use the cotton gloves included.
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.
- Keep flammable materials away from lit bulb.

# Federal Communications Commission

**FCC Statement**

**CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

--Reorient or relocate the receiving antenna.

--Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that

to which the receiver is connected.

--Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that might cause undesired operation.

**Contact:** Schwung Home, 313S. Centennial Street, High Point, NC 27260, +1 336 307 3712

# Components and features


## FEATURES

- Hand-crafted in brass

## RECOMMENDED DIMMERS

- Lutron Diva DVELV-300P
- Lutron Skylark SELV-300P
- Lutron RA2 Select RRD-6NA
- Lutron Caséta PD-6WCL

## COMPONENTS

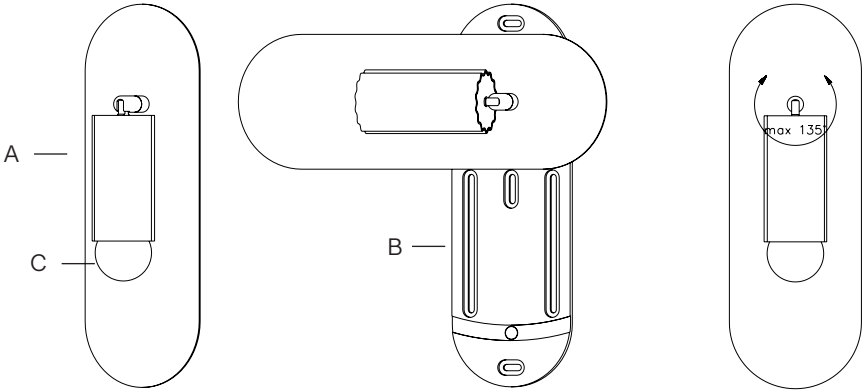


| | | |
|---|---|---|
| A | Wall sconce (1x) | |
| B | Mounting plate (1x) | |
| C | Light bulb (1x) | |
| | Max wattage | 10W |
| | Bulb base | E12 |
| | Max. bulb size | G45 |


**Not Included**
(recommended for installation):
Wall anchors (2-4x)
Junction Box (1x)

**Required Tools:**
Flat-head screwdriver

# Assembly instructions


Make sure you cut off power supply at the main fuse box/circuit breaker before commencing any work.

## 1



Carefully unpack the contents.


## 2



The junction box is not included. The openings in the wall plate allow it to be mounted on most junction boxes or directly on the wall.


**NOTE: Please consult a professional on the selection and installation of a junction box.**

3

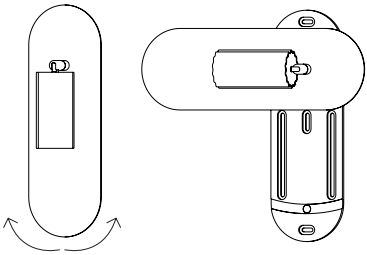

Pick up the wall plate from the box and twist it right or left. The mounting frame will be exposed.


4



Place the frame flush against the wall and mark the location of the mounting screws (not included) with a pencil, selecting from the various options available: left, right, top and bottom.

**NOTE: Consult your local hardware store about proper screws and anchors.**


5




After placing anchors in the wall, hold the wall sconce close to the wall and make all necessary electrical connections. The diagram on the left shows the most common markings and manner of connecting the cords.


**NOTE: We recommend installation by a licensed electrician.**

6

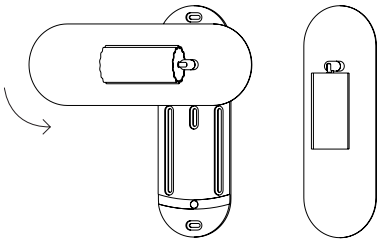


Attach the sconce to the wall using proper screws. You can now lower the wall plate, aligning it with the mounting frame.

7



Insert one (1) - 10W max, E12 light bulb into the socket (max. bulb size G45). Restore power and test the fixture.

8

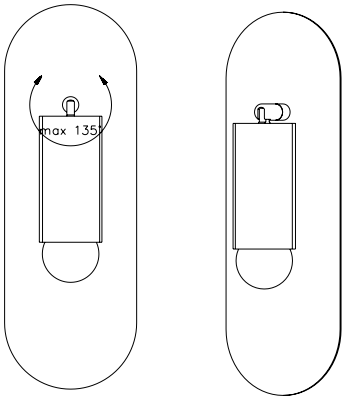


Assembly is complete. Enjoy your Schwung Lamp.

# Cleaning and maintenance



Make sure you cut off power supply to the lamp before commencing cleaning operations.

| Components | Maintenance | Tools |
|---|---|---|
| Brass Frame | Clean every month using a soft cloth, dampened slightly with water. Make sure the frame is dry before switching the lamp back on. | Soft cloth, water |
| Glass cylinders | Clean regularly with a soft dry cloth. Clean only the outside of the cylinder. If especially dirty, use a wet cloth first. Grease can be removed with a gentle glass cleaner. | Soft cloth, Cotton gloves (!) |
| Light bulbs | Make sure your power supply is off before changing the bulb. Unscrew the globe where bulb needs replacing. Gently remove the bulb by pulling it out and replace with a LED bulb of the same parameters. | LED bulbs, Cotton gloves (!) |

**NOTE: Please remember, solid brass may tarnish over time. This is a natural process. Make sure you follow our guidelines to preserve the great look of Schwung lighting for years.**

# Troubleshooting

| Problem | Possible Cause | Action |
|---|---|---|
| Tarnishing | Oxidation of brass is a natural process. Although it is lacquered, its color may change slightly over time. | No action is necessary apart from regular cleaning. See the Maintenance section. |
| Crooked hanging | Wrong positioning of cylinders. | Loosen the retainer ring and position the cylinder correctly. Turn the retainer ring gently to secure the position. |

**NOTE: Dear client, please be assured our team strives to deliver highest quality products. The handmade nature of the products offers a unique aesthetic experience and allows for small imperfections, which is inherent in crafts. If solutions offered below are not sufficient, please do not hesitate and contact our customer service.**

# Having trouble?

We’re sorry to hear that.
Our enlightened objects are designed for longevity. Each piece is made by hand to ensure the highest possible quality and a unique aesthetic experience. This means you may encounter small surface imperfections. We like to think of them as whispered greetings from our craftspeople. But should you have any concerns about your product and the previous solutions fail to help, please don’t hesitate to email us at info@schwung.design