



A716B Heater Spec Sheet - 2024 - PDF PDF

File Edit View Help



Page 1 of 1 | Edit | Mark up | Sign a copy

Search | Zoom: 175% | Full Screen

blast infrared heat lamps and 60W incandescent bulb. 4 function wall switch included.

Motor/Blower:

- Permanently lubricated enclosed condenser motor.
- Engineered for continuous operation.
- Power rating shall be 120v/60Hz.
- Fan shall be UL and cUL listed when GFCI protected.
- Motor equipped with thermal shut-off. Requires 15 amp circuit.

Housing:

- Rust proof painted Steel Body
- 4" Duct connector
- Built-in damper
- Articulating and expandable anti-vibration brackets included.
- Designed for installation in

(OR), Farmhouse Black (FHB), Bronze (OR), Farmhouse Black (FHB).

Ventilating Area:


For bathrooms up to 100 square feet.

Warranty:

6 Years when installed by licensed professional.

Architectural Specifications:

Exhaust fan will be ceiling mount with no less than 100CFM and no more than 1.2 Sones at 0.1 static pressure in inches water gauge. Power consumption shall be no greater than 1160 watts. The motor will be permanently lubricated, engineered for continuous operation. Duct diameter will be 4" round. Exhaust fan, heater and light may be wired separately. Fan will not be installed directly over tub/shower enclosure. When used with GFCI branch circuit wiring shall be

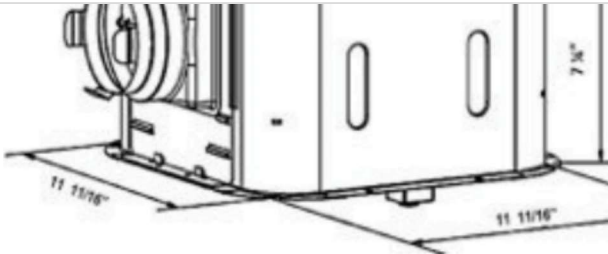

W

Model: A716 Series	4" Duct
Static Pressure (inches w.g.)	0.1
Air Volume (CFM)	90
Noise (Sones)	1.2
Power Consumption (Watts)	1160
Current (Amps)	9.6
Housing Dimensions	7 1/4" x 11 11/16" x 4 1/2"