



## ASSEMBLY INSTRUCTIONS

### ITEM DESCRIPTION:

ITEM NO. : DPC33	NAME: ALEENA PENDANT
MATERIAL TYPE: IRON, ALABASTER	FINISH: ENGLISH BRONZE
SOCKET TYPE: : LED	SOCKET QTY: 3
BULB WATTAGE: 15W	
VOLTAGE: 100V-120V	ITEM NET WEIGHT: 9.5LBS

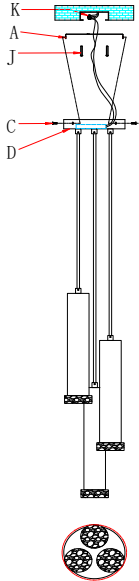

PLEASE IGNORE THIS DEVICE  
ON THE BACK PLATE.

### PARTS INCLUDED:

Mounting Plate (A)	Qty: 1PC
Canopy (D)	Qty: 1PC
Mounting Screw (J)	Qty: 2PCS

### HARDWARE INCLUDED:

Mounting Screw (J)	Qty: 2PCS
Canopy Screw (C)	Qty: 2PCS
Wire Cap (K)	Qty: 1PC
Plastic Wire Connector	Qty: 3PCS

### TOOLS NEEDED (Not Included):

1 Screwdriver
---------------

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



### TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/circuit breaker.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
- Gently pull wiring down from junction box and allow to hang.
- Remove the mounting plate(A) from the back plate(D) by loosening the canopy screw (C) using a Phillips screwdriver.
- Place the mounting plate(A) over the center of the junction box.
- Align the holes in the mounting plate (A) with the holes in the junction box and secure it with two mounting screws (J). Secure the screws using a Phillips head screwdriver.
- Gently pull wiring down from junction box and allow to hang.
- PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE TERMINAL BLOCK(M). IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
- Carefully inspect the flush mount's fixture wires.  
Neutral fixture wire: White  
Hot fixture wire: Black  
Ground wire: Bare wire
- Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
- Attach the neutral fixture wire from the flush mount to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
- Attach the hot fixture wire from the fixture to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

- Gently tuck the wire cap(K) neatly into the junction box.
- Attach the canopy(D) to the mounting plate (A) using 2 set screws (C), and tighten with a screwdriver.
- Restore power to junction box and test fixture.

Precaution: This product is suitable for TRIAC dimmer switch, switch model recommended:

LUTRON #DVL-153P  
LUTRON #DVELV-300P

### CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS

# **WARNING:**

**INSTALL BEFORE RESTORING  
POWER AT THE BREAKER**

---

**LOW VOLTAGE LED DRIVER INSIDE.**

**DO NOT APPLY POWER AT THE BREAKER  
OR SWITCH UNTIL FIXTURE IS FULLY INSTALLED.  
FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT  
IN MALFUNCTION AND WILL VOID WARRANTY.**