

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.:DWC57

NAME: Freeney Sconce

MATERIAL TYPE: Glass

FINISH: Opal/ Swirl


SOCKET TYPE: E12

SOCKET QTY: 1

BULB WATTAGE: 25W/6W CFL/2W LED

VOLTAGE: 110V-120V

ITEM NET WEIGHT:6.6LBS

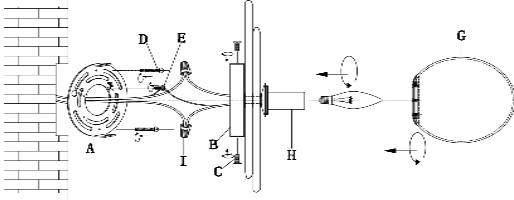

F Plastic wire connectors



K Anchor



TOOLS NEEDED(NOT INCLUDED)

G SCREWDRIVER



L Strengthen screw



PARTS INCLUDED:

Mounting Plate(A) Qty:1

Lamp Body(B) Qty:1

Plate Screw(C) Qty:2

Mounting screws(D), Qty:2

Glass Shade (G) Qty:1

HARDWARE INCLUDED:

Mounting Screws Qty: 3

Plastic Wire Connector Qty: 3

TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation .

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.


For customer service questions call 1-800-338-2150



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Attach the mounting plate (A) to wall or junction box using mounting screws(D), and tighten it with a screwdriver.
3. Connect ground wire from wall to ground wire from lamp using wire caps.
4. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
5. Attach front face of light to back plate by inserting canopy screws (B) through predrilled holes in front face and into back plate as shown. Tighten using screwdriver.
6. Insert Type B 25W bulb (Not Included) into the socket(H)
7. Twist the glass shade (G) clockwise onto the socket (H) until it is securely fastened.
8. Restore power to junction box and test fixture.

DO NOT EXCEED SPECIFIED MAX WATTAGE.

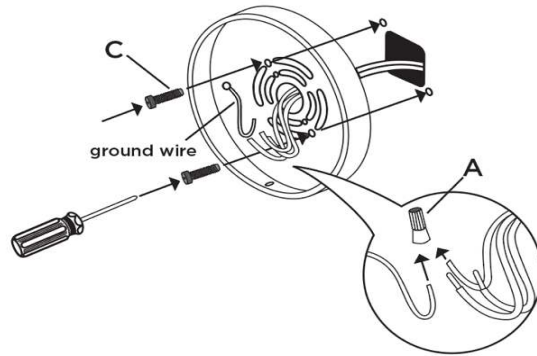

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS