

## ASSEMBLY INSTRUCTIONS

### ITEM DESCRIPTION:

ITEM NO.: DWCS6 NAME: HAYNES SCONCE



MATERIAL TYPE: METAL FINISH: CHATTERED ANTIQUE BRASS

SOCKET TYPE:LED SOCKET QTY: 1

BULB WATTAGE: 6W/2700K/90+CRI

VOLTAGE:100V-130V ITEM NET WEIGHT: 2.8LBS

**PLEASE IGNORE THIS DEVICE IN**

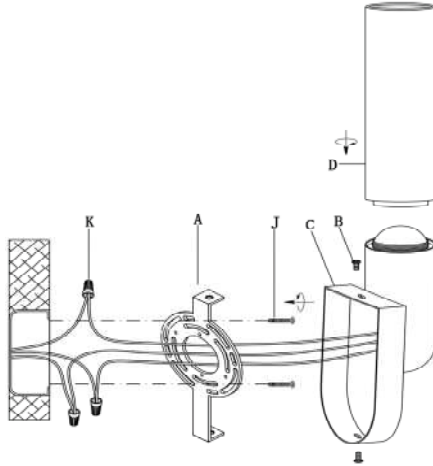

### PARTS INCLUDED:

Mounting Plate (A)	Qty: 1 Pc	Canopy Screw (B)	Qty: 2 Pcs
Lamp Base (C)	Qty: 1 Pc	Glass Tube (D)	Qty: 1 Pc

### HARDWARE INCLUDED:

Mounting Screws (J)	Qty: 2 Pcs
Plastic Wire Cap (K)	Qty: 3 Pcs

### TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



### TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Attach mounting plate(A) to wall or junction box using mounting screws (J).
3. Connect ground wire from wall to ground wire from lamp using the wire caps (K).
4. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(K) . **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
5. PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE TERMINAL BLOCK (M) IN THE LAMP BASE. IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
6. Attach lamp assembly (C) to mounting plate (A) by inserting canopy screws (B) through predrilled holes. Then tighten by using screwdriver.
7. Put and assemble the glass tube (D) by rotating in a clockwise direction with lamp base(C) .
8. Restore power to junction box and test fixture.

### CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and

For customer service questions call 1-800-338-2150

ARTERIO RS