

## ASSEMBLY INSTRUCTIONS

### ITEM DESCRIPTION:


ITEM NO.: GADFC03 NAME: GLAZE MULTIPOINT  
FLUSHMOUNT

MATERIAL TYPE: METAL FINISH:ANTIQUE BRASS

SOCKET TYPE: E26 SOCKET QTY: 4PCS

BULB WATTAGE: 25W TYPE A

VOLTAGE: 120V ITEM NET WEIGHT: 20.9LBS

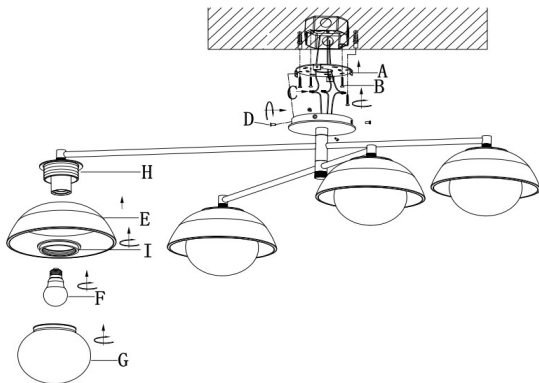

### PARTS INCLUDED:

Mounting plate(A) Qty: 1 Fixture(H)

Mounting screw(B) Qty: 3 Metal ring(I)

Wire cap(C) Qty: 3

Canopy screw(D) Qty: 3

Ceramic shade(E) Qty: 4

Bulb(F) Qty: 4(Not included)

Glass globe(G) Qty: 4

### HARDWARE INCLUDED:

Mounting Screws Qty: 3

Plastic Wire Cap Qty: 3

Green Ground Screw Qty: 1

#### TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



### TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Attach the mounting plate (A) to the ceiling junction box using the enclosed mounting screws (B) and tighten screws with screwdriver.
3. Connect ground wire from ceiling to ground wire from lamp using wire caps(C).
4. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(C).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

5. Attach fixture(H) to the mounting plate (A) and secure with 3 canopy screws(D). Tighten using a screwdriver.
6. Attach each of 3 ceramic shades (E) onto the fixture(H) and secure it with metal rings(I).
7. Install 4 light bulbs (F) into socket (each max. 25W A or 7W CFL or 5W LED - bulbs are not included).
8. Attach each of the 4 glass shades (G) onto the fixture (H) in a clockwise direction until they are tight.
9. Restore power to junction box and test fixture.

### CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS