

# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

ITEM NO.: DLC39	NAME: RAPHEAL CHANDELIER
MATERIAL TYPE: METAL+GLASS	FINISH: ANTIQUE BRASS
SOCKET TYPE: LED	SOCKET QTY: 1
BULB WATTAGE: 15W	
VOLTAGE: 100V-120V	ITEM NET WEIGHT:23.1 LBS




## TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/ circuit breaker.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
- Gently pull wiring down from ceiling junction box and allow to hang.
- Remove mounting plate(A) from the canopy(D) by unscrewing the canopy screw(F).
- Position fixture in desired location on ceiling. The mounting plate features (2) holes for screw mounting. Mark these spots on the ceiling with a pencil to drill holes. Drill 2 holes on these spots and insert anchors(C) into drilled holes.
- Pass the Power Wire (O) through the rods (G4), (G3), (G2), and (G1). Screw the rod (G4) to the lamp body (D) until tight. Repeat the same operation with rods (G3), (G2), and (G1). When you connect the rods, loosen the small hex screws (E) in the side hole first, then tighten them with an Allen wrench (U) after all rods are connected. Ensure that all the hexagonal screws are tightened securely.
- Align the 2 holes in the canopy(D) and insert the rod(G1) into the corresponding holes. Secure the canopy(D) with Hex Nut (B) and tighten it using a wrench (S).
- Pull the electrical cord of "j box" through the exit hole of the mounting plate(A).
- PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE WIRE CONNECT DEVICE(M). IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
- Carefully inspect the chandelier's fixture wires.  
Neutral fixture wire: White | Hot fixture wire: Black | Ground wire: Bare wire

- Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector (K) and wrap the connection with electrical tape.
- Attach the neutral fixture wire from the chandelier to the neutral junction box wire (usually white). Fasten each together with a wire connector (K) and wrap the connection with electrical tape.
- Attach the hot fixture wire from the chandelier to the hot junction box wire (usually black). Fasten each together with a wire connector (K) and wrap the connection with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

- FINALLY, PLEASE TAKE NOTE THAT THIS PRODUCT IS SUITABLE FOR 0-10V DIMMER SWITCHES. CONNECT THE PURPLE WIRE(+) AND THE GRAY WIRE(-) TO THE DIMMER SWITCH AS SHOWN IN Fig 1. BE SURE NO STRANDS ARE EXPOSED.
- Connect the power wires (O) of the lamp together using the 2-wire terminal (P). Connect the black wire to the positive electrode and the white wire to the negative electrode of the 2-wire terminal (P).
- Gently tuck the wire connectors (K) neatly into the ceiling junction box.
- Place the mounting plate(A) over the center of the ceiling junction box.
- Attach the mounting plate (A) to the ceiling outlet box using the enclosed mounting screws (J) and tighten screws with a screwdriver. Insert the strengthened screw (E) to the anchor (C) to secure the mounting plate(A) and tighten screws with a screwdriver.
- Connect canopy(D) to the mounting plate(A) with 4pcs of screw(F) as drawing. And tighten screws with a screwdriver.
- Restore power to the junction box and test fixture.

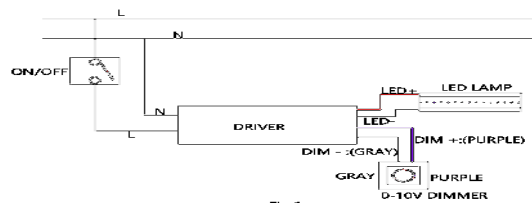

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

## PARTS INCLUDED:

Mounting Plate (A)	Qty:1PC	Power Wire (O)	Qty:1PC
Hex Nut(B)	Qty:2PCS	2-Wire Terminal (P)	Qty:1PC
Anchor(C)	Qty:2PCS	Wrench(S)	Qty:1PC
Canopy(D)	Qty:1PC	Allen Wrench(U)	Qty:1PC
Strengthened Screw(E)	Qty:2PCS	Hex Screw(I)	Qty:16PCS
Canopy Screw(F)	Qty:4PCS	Mounting Screw (J)	Qty:2PCS
Rod(G1,G2,G3,G4)	Qty:4PCS	Wire Connector(K)	Qty:3PCS
Lamp Body(H)	Qty:1PC		

## HARDWARE INCLUDED:

Mounting Screws	2	Hexangular Screw	16
Plastic Wire Connector	3	Allen Wrench	1
Green Ground Screw	1	Wrench	1

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver
- Allen Wrench

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150

ARTERIOS