


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DFC26	NAME: Axia Flush Mount
MATERIAL TYPE:	FINISH:
SOCKET TYPE: LED	SOCKET QTY: 4
BULB WATTAGE: 26W	
VOLTAGE: 120V	ITEM NET WEIGHT: 21LBS

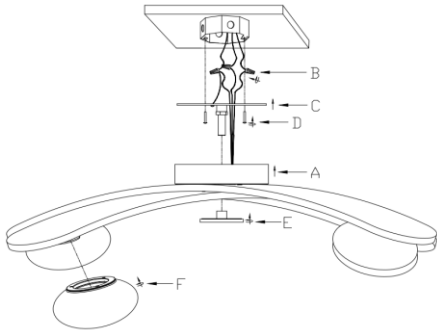

PARTS INCLUDED:

Mounting Plate	Qty:	IPC
Canopy	Qty:	IPC
Loop	Qty:	N/A
Socket Assembly	Qty:	

HARDWARE INCLUDED:

Mounting Screws	2	Canopy Screws	N/A
Plastic Wire Connector	3	Hexangular Screw	N/A
Green Ground Screw	N/A	Allen Wrench	N/A


TO INSTALL YOU WILL NEED:

• 2 people recommended

• Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.

2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.

3. Gently pull wiring down from ceiling junction box and allow to hang.

4. Remove mounting plate from the canopy by unscrewing the collar.

5. Carefully inspect the pendant's fixture wires.

Neutral fixture wire: White

Hot fixture wire: Black

Ground wire: Green

6. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.

7. Attach the neutral fixture wire from the pendant to the neutral junctionbox wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.

8. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

9. Attach the mounting plate(C) to the ceiling and ensure with provided 2pcs mounting screws(D).

10. Attach the fixture(A) to the mounting plate(C) and ensure with provided finial(D).

11. Screw the 4pcs glass shades(F) to the fixture(A).

12. Restore power to junction box and test fixture. The fixture included 4x6W LED Module.

DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS

WARNING

INSTALL BEFORE RESTORING
POWER AT THE BREAKER

LOW VOLTAGE LED DRIVER INSIDE.

DO NOT APPLY POWER AT THE BREAKER
OR SWITCH UNTIL FIXTURE IS FULLY INSTALLED.
FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT
IN MALFUNCTION AND WILL VOID WARRANTY.

For customer service questions call 1-800-338-2150

ARTERIO RS