
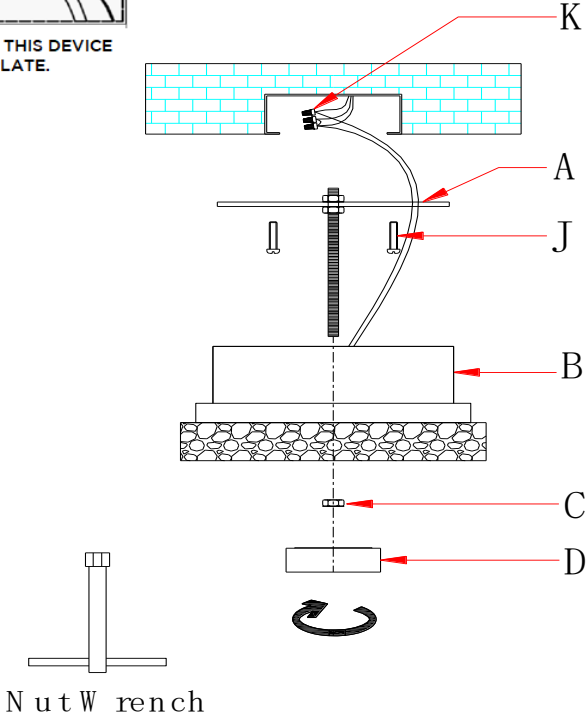


ASSEMBLY INSTRUCTIONS	
ITEM DESCRIPTION:	
ITEM NO. : DFC28	NAME: MOERS MINI FLUSH MOUNT
MATERIAL TYPE: IRON +ALABASTER	FINISH: ENGLISH BRONZE
SOCKET TYPE: : LED	SOCKET QTY: 1
BULB WATTAGE: 10W	
VOLTAGE: 100V-120V	ITEM NET WEIGHT: 4.4LBS



PARTS INCLUDED:	
Mounting Plate (A)	Qty: 1PC
Canopy (B)	Qty: 1PC
Nut (C)	Qty: 2PCS
Finial (D)	Qty: 1PC

HARDWARE INCLUDED:	
Mounting Screw (J)	Qty: 2PCS
Wire Cap (K)	Qty: 3PCS
Green Ground Screw	Qty: 1PC
Steel wire rope assembly (X)	Qty: 1PC

TOOLS NEEDED (Not Included):
1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
  2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
  3. Remove the mounting plate(A) from the back plate(B) by loosening the nut (C ) and the finial (D).
  4. Place the mounting plate(A) over the center of the junction box.
  5. Align the holes in the mounting plate (A) with the holes in the junction box and secure it with two mounting screws (J). Secure the screws using a Phillips head screwdriver.
  6. Gently pull wiring down from junction box and allow to hang.
  7. PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE TERMINAL BLOCK(M). IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
  8. Carefully inspect the fixture wires.  
Neutral fixture wire: White  
Hot fixture wire: Black  
Ground wire: Bare wire
  9. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
  10. Attach the neutral fixture wire from the flush mount to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
  11. Attach the hot fixture wire from the flush mount to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 12 Gently tuck the Wire Cap(K) neatly into the junction box.
  13. Attach the canopy (B) to the mounting plate (A) using the nut (C ) and the finial (D), and secure it until tight.
  14. Restore power to junction box and test fixture.

Precaution: This product is suitable for TRIAC dimmer switch, switch model recommended:

LUTRON #DVLC-153P  
LUTRON #DVELV-300P

CARE INSTRUCTIONS:  
Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

A R T E R I O R S

# **WARNING:**

## **INSTALL BEFORE RESTORING POWER AT THE BREAKER**

---

**LOW VOLTAGE LED DRIVER INSIDE.**

**DO NOT APPLY POWER AT THE BREAKER  
OR SWITCH UNTIL FIXTURE IS FULLY INSTALLED.  
FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT  
IN MALFUNCTION AND WILL VOID WARRANTY.**