

ASSEMBLY INSTRUCTIONS

ARTERIORS

ITEM DESCRIPTION:

ITEM NO.: DWI32	**NAME:** Diesel Sculptural Wall Sconce
MATERIAL TYPE: Iron / Brass	**FINISH:** Antique Brass
SOCKET TYPE: E26 Double	**SOCKET QTY:** 4
BULB WATTAGE: 25W	**VOLTAGE:** 220V/240V
ITEM NET WEIGHT: 27.16 LBS	

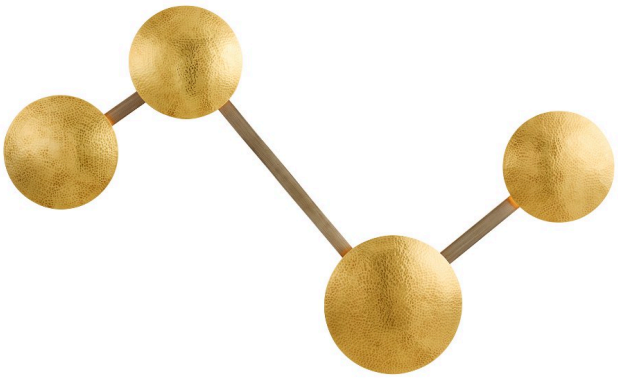

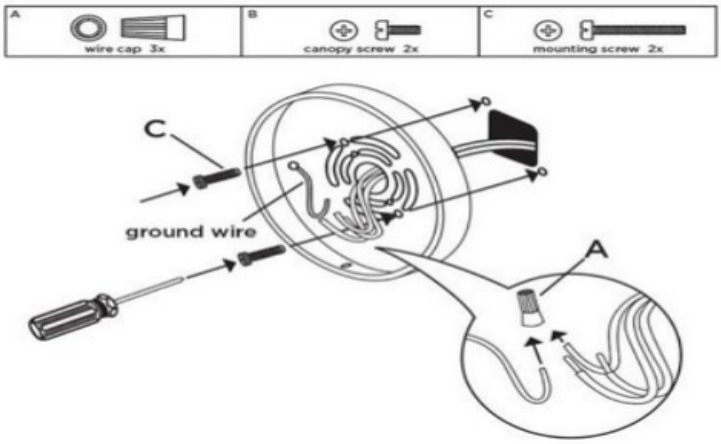

PARTS INCLUDED:

MOUNTING PLATE	2	BACK PLATE	2
MOUNTING SCREW (C)	2	CANOPY SCREW (B)	4
WIRE CAP (A)	2		

TO INSTALL YOU WILL NEED:

- PHILLIPS SCREWDRIVER

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Carefully unpack all parts and hardware and lay them on a soft surface.
3. Attach the mounting plates to the junction box or wall with the mounting screws (C), using a Phillips screwdriver.
4. Gently pull the wires down from the junction box and let them hang.
5. Connect the fixture ground wire (green or bare) to the junction box ground wire (usually green or bare) with a wire cap (A) and wrap with electrical tape.
6. Connect the white (neutral) fixture wire to the white junction box wire with a wire cap (A) and wrap with electrical tape.
7. Connect the black (hot) fixture wire to the black junction box wire with a wire cap (A) and wrap with electrical tape. Make sure no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

8. Gently tuck all connections into the junction box.
9. Attach the fixture to the back plates by inserting the canopy screws (B) through the pre-drilled holes. Tighten with a screwdriver.
10. Insert four bulbs (not included), max 25W each, into the sockets. Do not exceed the maximum wattage.
11. Restore power at the breaker and test the fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150