



ASSEMBLY INSTRUCTIONS	
ITEM DESCRIPTION:	
ITEM NO. :DFC32	NAME: MOERS LARGE FLUSH MOUNT
MATERIAL TYPE: IRON +ALABASTER	FINISH: ENGLISH BRONZE, WHITE
SOCKET TYPE: : LED	SOCKET QTY: 1
BULB WATTAGE: 25W	
VOLTAGE: 100V-120V	ITEM NET WEIGHT: 30.8LBS

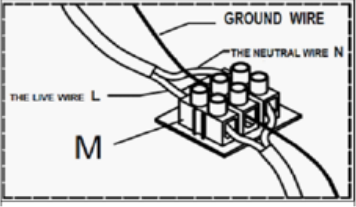

PLEASE IGNORE THIS DEVICE  
ON THE BACK PLATE.

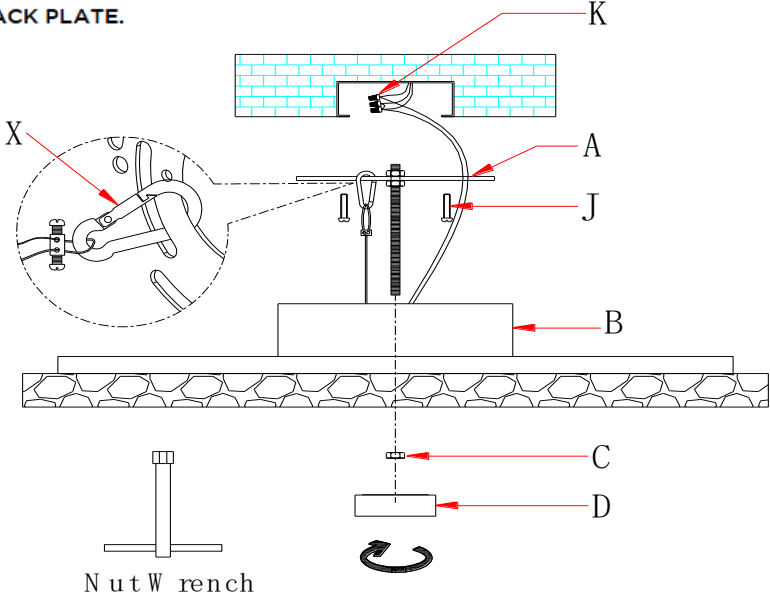

PARTS INCLUDED:

Mounting Plate(A)	Qty: 1PC
Canopy (B)	Qty: 1PC
Nut (C)	Qty:2PCS
Finial (D)	Qty: 1PC

HARDWARE INCLUDED:

Mounting Screws	Qty: 2PCS
Green Ground Screw	Qty: 1PC
Wire Cap(K)	Qty: 3PCS
Steel wire rope assembly (X)	Qty: 1PC

TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/circuit breaker.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
- Remove the mounting plate(A) from the back plate(B) by loosening the nut (C ) and the finial (D).
- Place the mounting plate(A) over the center of the junction box.
- Align the holes in the mounting plate (A) with the holes in the junction box and secure it with two mounting screws (J). Secure the screws using a Phillips head screwdriver.
- Gently pull wiring down from junction box and allow to hang.
- PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE TERMINAL BLOCK(M). IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
- Carefully inspect the fixture wires.  
Neutral fixture wire: White  
Hot fixture wire: Black  
Ground wire: Bare wire
- Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
- Attach the neutral fixture wire from the flush mount to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
- Attach the hot fixture wire from the flush mount to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- Gently tuck the Wire Cap(K) neatly into the junction box.
- Attach the canopy (B) to the mounting plate (A) using the nut (C ) and the finial (D), and secure it until tight.
- Restore power to junction box and test fixture.

Precaution: This product is suitable for TRIAC dimmer switch, switch model recommended:

LUTRON #DVLC-153P  
LUTRON #DVELV-300P

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS

# **WARNING:**

## **INSTALL BEFORE RESTORING POWER AT THE BREAKER**

---

**LOW VOLTAGE LED DRIVER INSIDE.**

**DO NOT APPLY POWER AT THE BREAKER  
OR SWITCH UNTIL FIXTURE IS FULLY INSTALLED.  
FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT  
IN MALFUNCTION AND WILL VOID WARRANTY.**