


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DLC53	NAME: MAHOWALD CHANDELIER
MATERIAL TYPE: IRON, GLASS	FINISH: CHROME, CLEAR
SOCKET TYPE: E12	SOCKET QTY: 16
BULB WATTAGE: 25W	
VOLTAGE: 110-120V	ITEM NET WEIGHT: 71.5 LBS

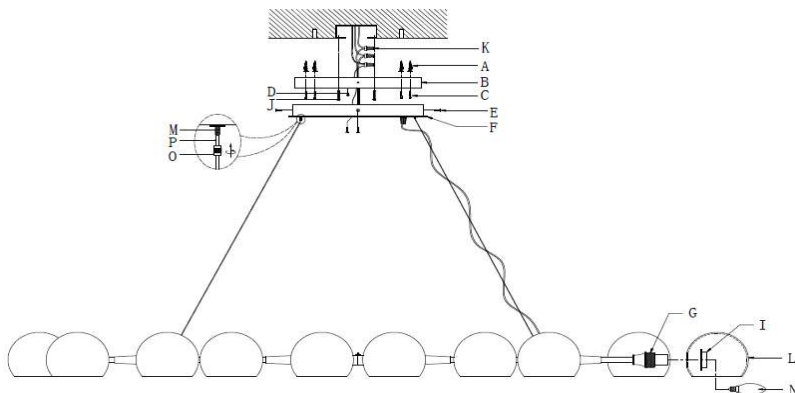

PARTS INCLUDED:

Anchor (A)	Qty: 4PCS	Socket Ring (I)	Qty: 1PC
Mounting Plate(B)	Qty: 1PC	Glass (L)	Qty: 16PCS
Strengthen Screw (C)	Qty: 4PCS	Wire Holder Tubing (M)	Qty: 4PCS
Set Screw (E)	Qty: 4PCS	Bulb (not included) (N)	Qty: 16PCS
Canopy (F)	Qty: 1PC	Lock Ring (O)	Qty: 4PCS
Socket (G)	Qty: 16PCS	Aircraft Wire (P)	Qty: 4PCS

HARDWARE INCLUDED:

Mounting Screws(J)	Qty: 4PCS	Plastic Wire Connector (F)	Qty: 3PCS
--------------------	-----------	----------------------------	-----------

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove mounting plate(B) from the canopy(F) by loosening canopy set screws(E).
5. Carefully inspect the pendant's fixture wires. Neutral fixture wire: White ; Hot fixture wire: Black ; Ground wire: Green
6. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(F) and wrap the connection with electrical tape.
7. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire connector(F) and wrap the connection with electrical tape.
8. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire connector(F) and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OR SAFETY WILL BE COMPROMISED.**
9. Gently tuck the wire connections neatly into the ceiling junction box
10. To adjust the appropriate length of the aircraft wire (P), loosen the lock ring(O) first then push down the wire holder tubing(M). After the length has been appropriately adjusted, screw the lock ring(O) onto the wire holder tubing(M) till tight.
11. Place the mounting plate(B) on the ceiling j-box and mark 4 spots on the ceiling with a pencil to drill holes. Make sure the holes are aligned with holes on the mounting plate(B).
12. Drill 4 holes on the spots then insert plastic anchors (A) into drilled holes for fastening the fixture and fasten it loosely to check the alignment.
13. Attach the mounting plate (B) to the ceiling outlet box using the enclosed set screws (E) and tighten screws with a screwdriver.
14. Fasten the mounting plate(B) by affixing strengthen screws (C) into plastic wall anchors (A) securely. Make sure the anchor(A) and strengthen screws(C) is tightened enough.
15. Remove the socket ring(I), attach the glass(L) on the fixture and then secure with the socket ring(I).
16. Insert 16 type b 25w bulb (not included) into the sockets. Do not exceed specified wattage.
17. Restore power to the junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS