


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

| | |
|---------------------------------|----------------------------|
| ITEM NO.: DFC37 | NAME: STELLA FLUSHMOUNT |
| MATERIAL TYPE: IRON,ALABASTER | FINISH:ANTIQUE BRASS,WHITE |
| SOCKET TYPE:LED | SOCKET QTY: 1 |
| BULB WATTAGE: 8.0W/2700K/90+CRI | |
| VOLTAGE:110-277V | ITEM NET WEIGHT:8.6 LBS |

PLEASE IGNORE THIS DEVICE IN

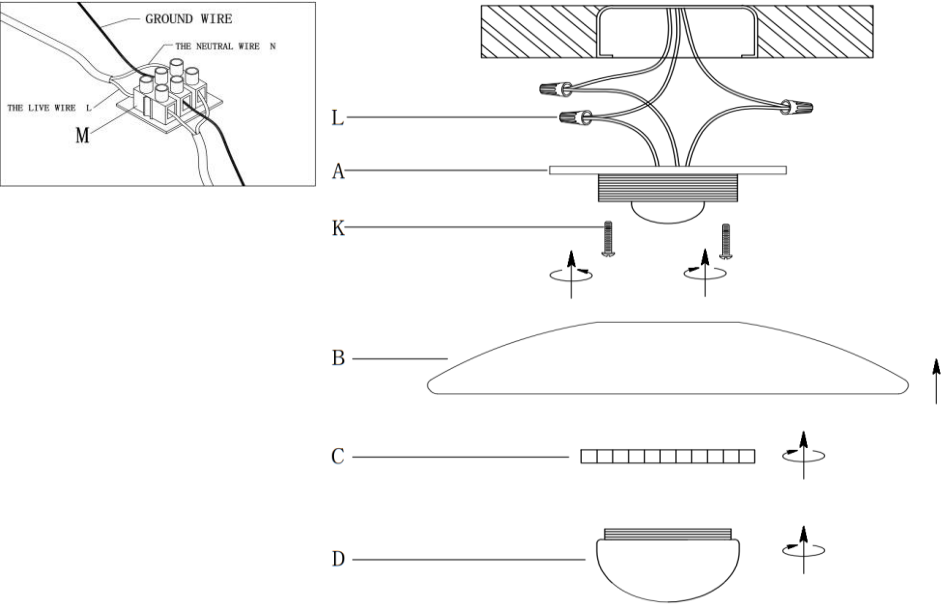

PARTS INCLUDED:

| | | | | | |
|----------------|-----|-----------|------------|-----|-----------|
| Lamp Base | (A) | Qty: 1 Pc | Metal Ring | (C) | Qty: 1 Pc |
| Alabaster Dish | (B) | Qty: 1 Pc | Dome Shade | (D) | Qty: 1 Pc |

HARDWARE INCLUDED:

| | |
|----------------------|------------|
| Mounting Screws (K) | Qty: 2 Pcs |
| Plastic Wire Cap (L) | Qty: 3 Pcs |

TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.



We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/circuit breaker.
- Before mounting, remove the alabaster shade(D) and the metal ring (C) by rotating them counterclockwise carefully.
- Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly carefully.
- Connect ground wire from ceiling to ground wire from lamp using the wire caps (L).
- Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(L) . DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE TERMINAL BLOCK (M) IN THE LAMP BASE. IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
- Attach lamp base(A) to ceiling or junction box ,then using mounting screws (K) to through predrilled holes to tight.
- Attach the alabaster dish (B) to the lamp base(A) with the metal ring (C) by turning in a clockwise direction.
- Assembly the small dome shade(D) with lamp base (A) by turning in a clockwise direction.
- Restore power to junction box and test fixture.

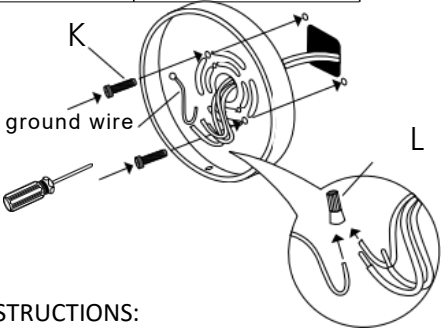

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS

WARNING:
INSTALL BEFORE RESTORING
POWER AT THE BREAKER
LOW VOLTAGE LED DRIVER INSIDE.

DO NOT APPLY POWER AT THE BREAKER
OR SWITCH UNTIL FIXTURE IS FULLY INSTALLED.
FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT
IN MALFUNCTION AND WILL VOID WARRANTY.