ASSEMBLY INSTRUCTIONS

ARTERIORS


ITEM DESCRIPTION:

ITEM NO.: GADWC16	**NAME:** Melt Linear Wall Sconce
MATERIAL TYPE: IRON, GLASS	**FINISH:** MODERN BRASS, CLEAR
SOCKET TYPE: Integrated LED	**SOCKET QTY:** 2
BULB WATTAGE: 10.5W	**VOLTAGE:** 100V-120V
ITEM NET WEIGHT: 11.9 LBS	








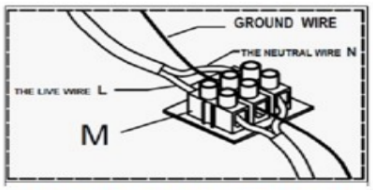

PLEASE IGNORE THIS DEVICE ON THE BACK PLATE.





PARTS INCLUDED:

Mounting Plate (A)	1	Back Plate (B)	1
Plate Hex Screw (C)	2	Mounting Screw (J)	2
Driver (N)	1	Safety Cable Hook (X)	1

HARDWARE INCLUDED:

Green Ground Screw	1	Wire Connector (K)	3
Allen Wrench (E)	2		

TO INSTALL YOU WILL NEED:

- Phillips Screwdriver

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Carefully unpack all parts and hardware and lay them on a soft surface.
3. Remove the mounting plate (A) from the back plate (B) by unscrewing the two plate hex screws (C) with the Allen wrench (E).
4. Place the mounting plate (A) over the junction box and attach it with the two mounting screws (J), using a Phillips screwdriver.
5. Hook the safety cable hook (X) onto the mounting plate (A).
6. Gently pull the wires down from the junction box and let them hang.
7. Connect the fixture ground wire (bare) to the junction box ground wire (usually green or bare) with a wire connector (K) and wrap with electrical tape. If there is no ground wire in the box, attach the fixture ground wire to the green ground screw on the mounting plate (A).
8. Connect the white (neutral) fixture wire to the white junction box wire with a wire connector (K) and wrap with electrical tape.
9. Connect the black (hot) fixture wire to the black junction box wire with a wire connector (K) and wrap with electrical tape. Make sure no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

10. The 3-wire terminal block (M) is for European wiring only. Do not connect any wires to it.
11. Gently tuck the driver (N) and all connections into the junction box.
12. Attach the back plate (B) to the mounting plate (A) with the plate hex screws (C) and tighten with the Allen wrench (E).
13. Restore power at the breaker and test the fixture.

DIMMING:

Compatible with TRIAC dimmers. Recommended: Lutron DVLC-153P or Lutron DVELV-300P.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150