
ASSEMBLY INSTRUCTIONS

ARTERIORS

ITEM DESCRIPTION:

ITEM NO.: DPC46	**NAME:** Pharos Pendant
MATERIAL TYPE: IRON, ALABASTER	**FINISH:** ENGLISH BRONZE, WHITE
SOCKET TYPE: E26	**SOCKET QTY:** 1
BULB WATTAGE: 60W /13W CFL/8W LED	**VOLTAGE:** 110V-120V
ITEM NET WEIGHT: 8.4 LBS	



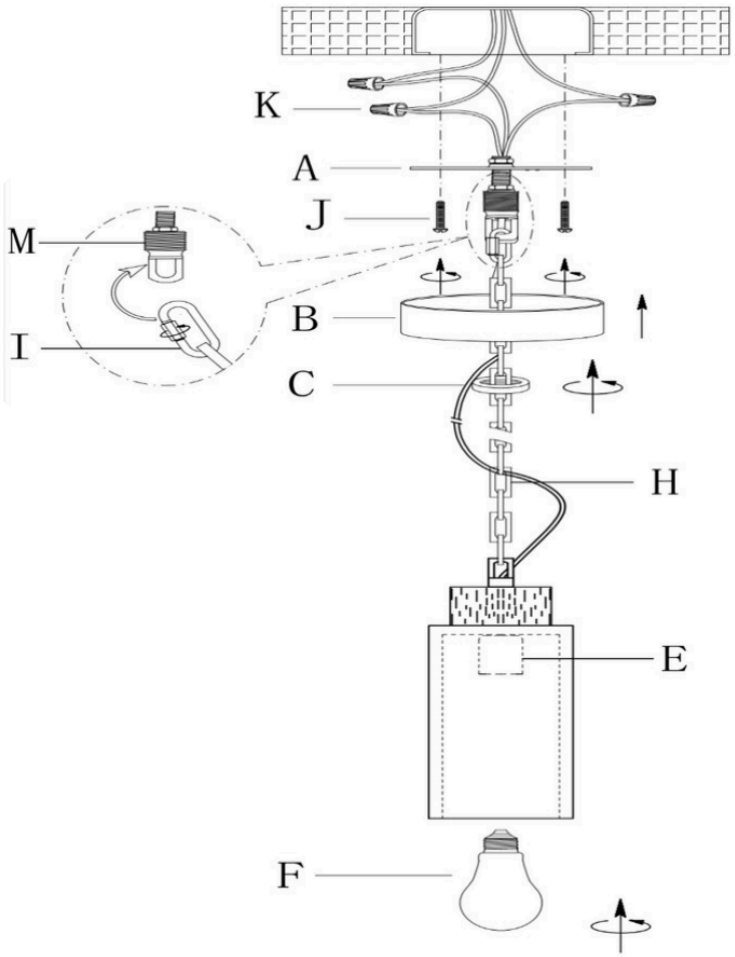

PARTS INCLUDED:

Mounting Plate (A)	1	Chain (H)	1
Canopy (B)	1	Quick Link (I)	1
Collar Loop Ring (C)	1	Collar Loop (M)	1
Socket (E)	1		

HARDWARE INCLUDED:

Mounting Screw (J)	2	Canopy Screw	
Plastic Wire Connector (K)	3	Allen Wrench	
Green Ground Screw	1		

TO INSTALL YOU WILL NEED:

• 2 people recommended • Phillips screwdriver • Allen wrench (included)

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Carefully unpack all parts and hardware and lay them on a soft surface.
3. Gently pull the wires down from the junction box and let them hang.
4. Remove the mounting plate (A) from the canopy (B) by unscrewing the collar loop ring (C).
5. Connect the fixture ground wire (bare) to the junction box ground wire (usually green or bare) with a wire connector (K) and wrap with electrical tape. If there is no ground wire in the box, attach the fixture ground wire to the green ground screw on the mounting plate (A).
6. Connect the white (neutral) fixture wire to the white junction box wire with a wire connector (K) and wrap with electrical tape.
7. Connect the black (hot) fixture wire to the black junction box wire with a wire connector (K) and wrap with electrical tape. Make sure no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

8. Gently tuck all connections into the junction box.
9. Attach the mounting plate (A), with the collar loop (M), to the junction box with the two mounting screws (J), using a screwdriver.
10. Thread the chain (H) through the collar loop ring (C) and the canopy (B), then attach the chain to the collar loop (M) with the quick link (I).
11. Slide the canopy (B) up to the ceiling and turn the collar loop ring (C) clockwise onto the nipple of the mounting plate (A) until secure.
12. Insert one Type A bulb, max 60W (or 13W CFL / 8W LED), not included, into the socket (E). Do not exceed the maximum wattage.
13. Restore power at the breaker and test the fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150