

Kenyon Wall

CW1181, CW1192 CW1202, CW1212 | 1.0

GENERATION LIGHTING WALL

GENERAL PRODUCT INFORMATION:




These fixtures are intended to be installed utilizing NEC compliant junction boxes. **NOTE:** Must use 2"x4" junction box to accommodate the 2 1/2" backplate height.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

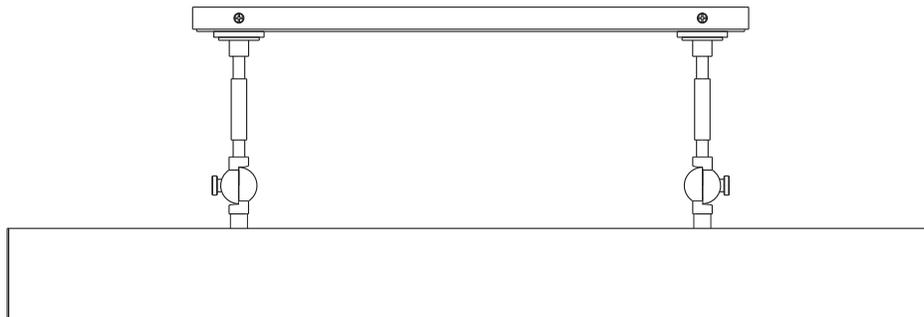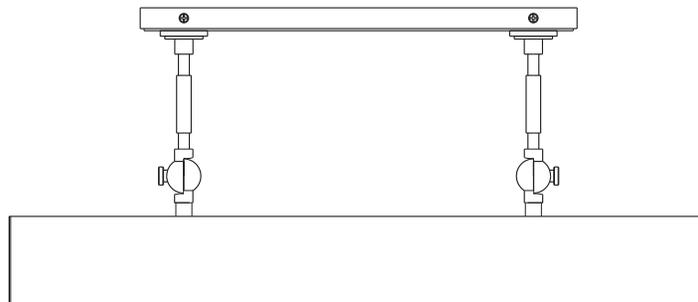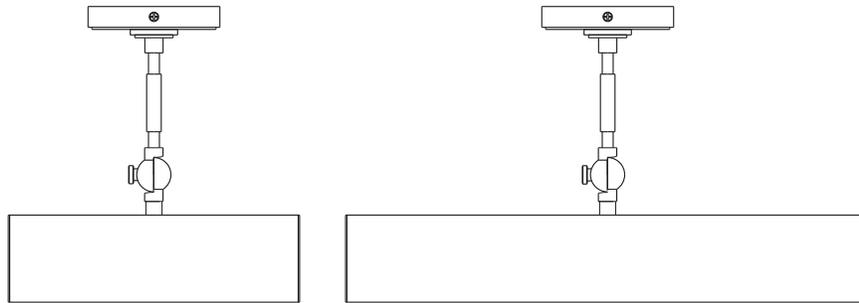

GENERATION LIGHTING
 7400 Linder Ave., Skokie, IL 60077
 T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

IA

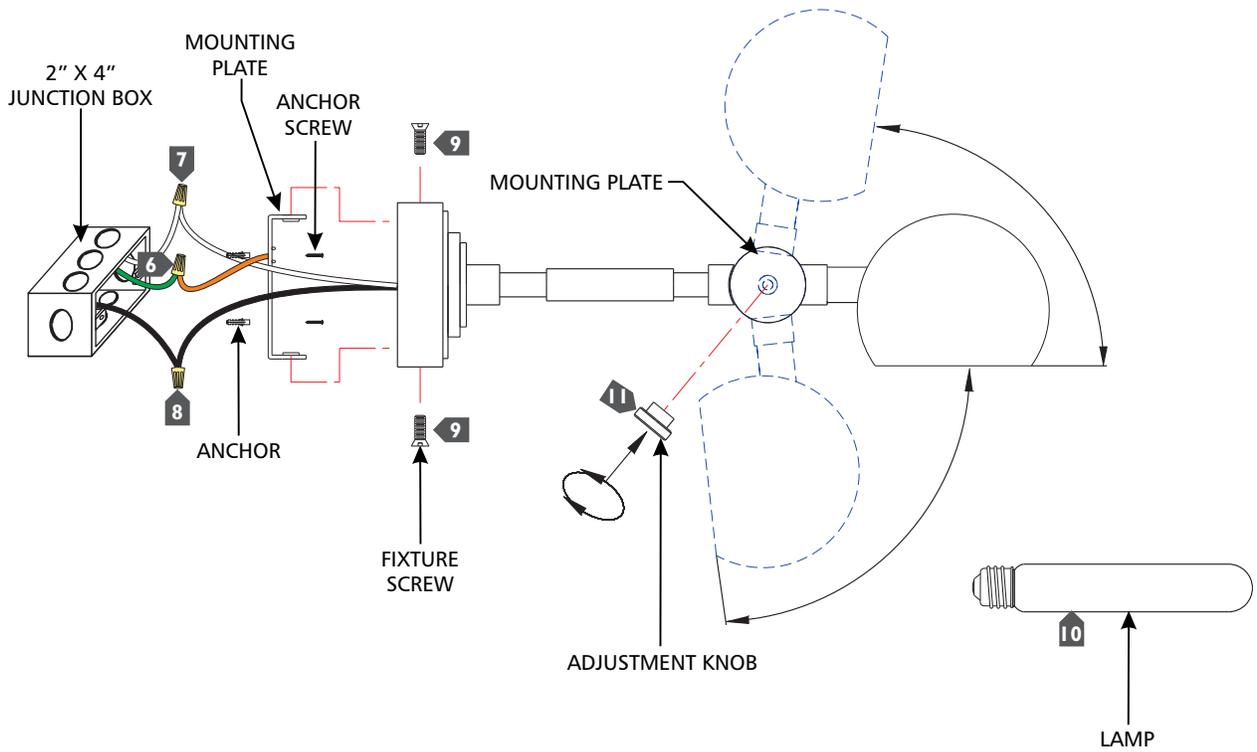

- 1** For models CW1202 & CW1212 only: Temporarily install the mounting bar to the junction box.
- 2** For models CW1202 & CW1212 only: Mark the anchor locations through the holes on the mounting plate, then remove it.
- 3** For models CW1202 & CW1212 only: Install anchors to the marked points.
- 4** Secure the mounting plate to the junction box. **NOTE:** Must use 2"x4" junction box to accommodate the 2 1/2" backplate height.
- 5** For models CW1202 & CW1212 only: Screw the anchors screws into the anchors.
- 6** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the fixture screws.
- 10** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- 11** To adjust the arm, loosen the adjustment knob, adjust the arm to the desired position, and re-tighten the adjustment knob to secure in place.