


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DPC20	NAME: LEANDRA PENDANT
MATERIAL TYPE: IRON,LEATHER,GLASS	FINISH: ENGLISH BRONZE, IVORY
SOCKET TYPE: E26	SOCKET QTY: 1
BULB WATTAGE: 60W or /13W CFL or/8W LED	
VOLTAGE: 110V-120V	ITEM NET WEIGHT: 9.5LBS

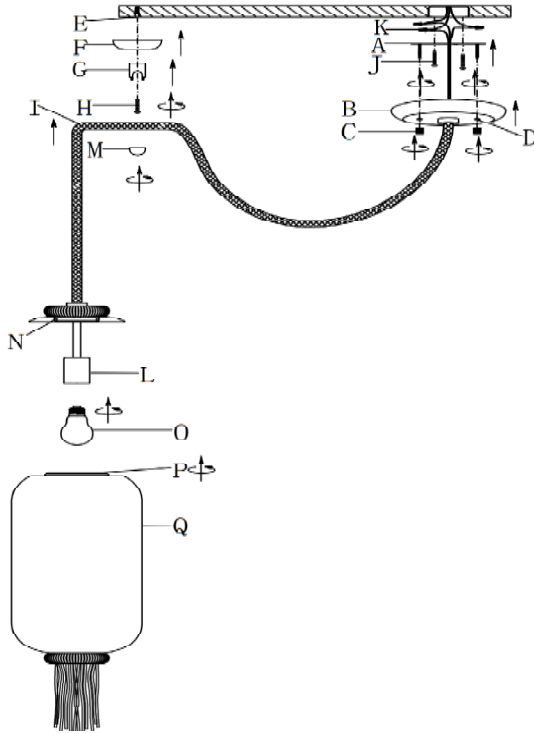

PARTS INCLUDED:

Mounting Plate (A)	Qty: 1Pc	Leather Cord (I)	Qty:1Pc
Large Canopy (B)	Qty: 1Pc	Socket (L)	Qty:1Pc
Screw Nut (C)	Qty: 2Pcs	Holder Cap (M)	Qty:1Pc
Small Canopy (F)	Qty: 1Pc	Metal Cap (N)	Qty:1Pc
Cord Holder (G)	Qty: 1Pc	Glass Shade (Q)	Qty:1Pc

HARDWARE INCLUDED:

Plastic anchor (E)	Qty : 1Pc	Mounting Screws (J)	Qty : 2Pcs
Plastic Wire Connector(K)	Qty : 3Pcs	Strengthen screw (H)	Qty : 1Pc
Green Ground Screw	Qty : 1Pc		

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove mounting plate from the large canopy (B) by unscrewing the screw nut.
5. **Carefully inspect the pendant's fixture wires. Neutral fixture wire: White Hot fixture wire: Black Ground wire: Green**
6. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(K) and wrap the connection with electrical tape.
7. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a connector(K) and wrap the connection with electrical tape.
8. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. Gently tuck the wire connections neatly into the ceiling junction box.
10. Place the mounting plate(A) over the center of the ceiling junction box.
11. Align holes in mounting plate(A) with holes in junction box and attach with two mounting bolts. Secure bolts with a Phillips head screwdriver.
12. Push the large canopy (B) to through predrilled holes (D), and up over the mounting plate(A) until it is flush with the ceiling, then tighten using screw nut (C) by turning in a clockwise direction.
13. Drill a hole at the desired distance on the ceiling. Insert plastic anchors (E) into drilled hole. Attach small canopy (F) and cord holder(G) to ceiling then using strengthen screws (H) till tight. **Make sure the cord will not slip.**
14. Put leather cord (I) to through cord holder (G) then using the holder cap (M) to secure the leather cord(I) by rotating in a clockwise direction.
15. Insert 1 TYPE-A 60W or /13W CFL or/8W LED bulb(not included) into socket(L). **DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.**
16. Put and assemble the glass shade (Q) with the metal cap(N) carefully by rotating in a clockwise direction.
17. Restore power to junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS