

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DLC40

NAME: LOUIS CHANDELIER

MATERIAL TYPE: IRON, GLASS

FINISH: ENGLISH BRONZE,
SMOKE


SOCKET TYPE: E12

SOCKET QTY:8

BULB WATTAGE:40W or /9W CFL or/4W LED

VOLTAGE: 110V-120V

ITEM NET WEIGHT:35.8LBS

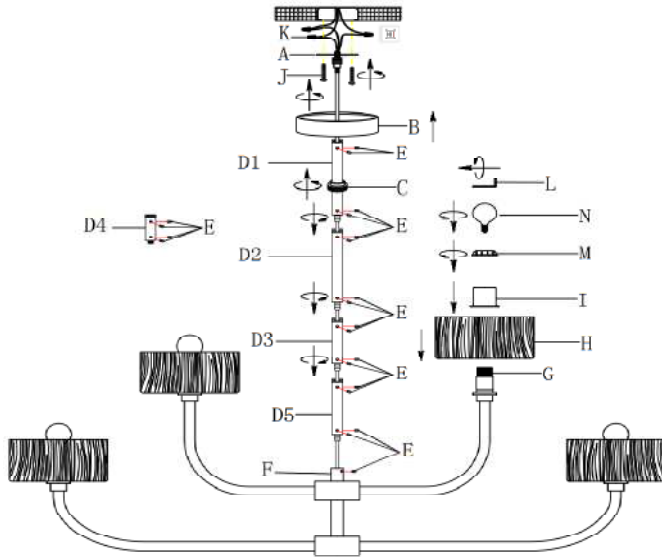

PARTS INCLUDED:

Mounting Plate (A)	Qty: 1 Pc	Lamp Body (F)	Qty: 1 Pc
Canopy (B)	Qty: 1 Pc	Socket (G)	Qty: 8 Pcs
Collar Ring (C)	Qty: 1 Pc	Glass Shade (H)	Qty: 8 Pcs
Rod (D)	Qty: 4 Pcs	Socket cup (I)	Qty: 8 Pcs
Hex Screw (E)	Qty: 21 Pcs	Socket Ring (M)	Qty: 8 Pcs

HARDWARE INCLUDED:

Mounting Screws (J)	Qty: 2 Pcs	Canopy Screws	
Plastic Wire Connector (K)	Qty: 3 Pcs	Allen Wrench (L)	Qty: 1 Pc
Green Ground Screw	Qty: 1 Pc		

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove the mounting plate(A) from the canopy(B) by unscrewing the collar ring(C).
5. Attach the lamp body (F) and canopy(B) with rod(D1,D2,D3,D4). When you connect the rods, loosen the small hex screws(E) first then tighten with allen wrench(L) after all rods are connected. Be sure all the hexangular screws(E) are tight enough.
6. Carefully inspect the pendant's fixture wire: **Neutral fixture wire: White; Hot fixture wire: Black; Ground wire: Green**
7. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(K) and wrap the connection with electrical tape.
8. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire connector(K) and wrap the connection with electrical tape.
9. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire connector(K) and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
10. Gently tuck the wire connections neatly into the ceiling junction box.
11. Place the mounting plate(A) over the center of the ceiling junction box.
12. Align holes in mounting plate(A) with holes in junction box and attach with two mounting screws. Secure screws by using enclosed Phillips head screwdriver.
13. Push canopy (B) up over the mounting plate(A) until it is flush with the ceiling.
14. Push collar ring (C) up to canopy (B) and tighten onto nipple in mounting plate (A) by turning in a clockwise to secure canopy.
15. Put the glass shade (H) and socket cup(I) onto the socket(G), then tighten with socket ring (I) to secure the glass shade.
16. Insert 8 TYPE-G 40W or /9W CFL or/4W LED bulb(not included) into the socket(G). **DO NOT EXCEED SPECIFIED WATTAGE.**
17. Restore power to junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS

