

# Angelo Chandeliers

F3133/5, F3134/6, F3135/9, F3137/10 1.2

GENERATION LIGHTING

## Chandelier


### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

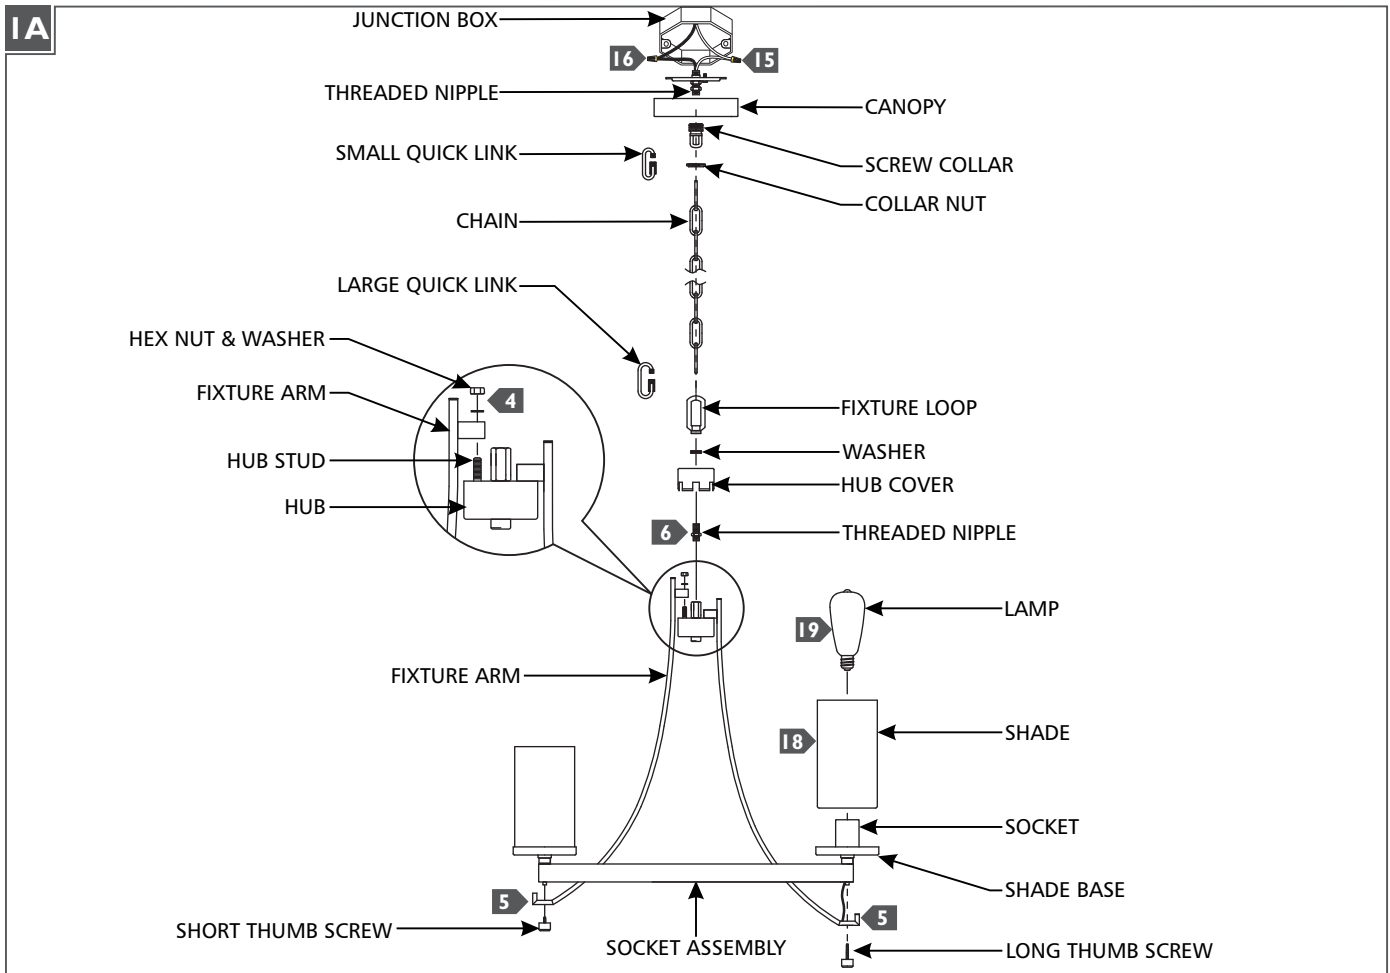

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate.
- 2** Fasten the screw collar into the bottom end of the threaded nipple and lock into position by tightening the hex nut.
- 3** Secure the mounting plate to the junction box.
- 4** For Models F3133/5, F3134/6, & F3137/10 Only: Install the fixture arms onto the hub studs using the washers and hex nuts.
- 5** For Models F3133/5, F3134/6, & F3137/10 Only: Install the fixture arms to the bottom of the socket assembly using the short and long thumb screws as shown.
- 6** For Models F3133/5, F3134/6, & F3137/10 Only: Feed the fixture wires through the threaded nipple, hub cover, washer, and fixture loop (in that order), then screw the threaded nipple onto the hub.
- 7** For Models F3133/5, F3134/6, & F3137/10 Only: Place the hub cover and washer onto the threaded pipe and secure them in place by screwing the fixture loop onto the pipe. Skip to step 9.
- 8** For Model F3135/9 Only: Feed the fixture wires through the fixture loop and screw it onto the hub.
- 9** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 10** Install the large quick link into the bottom end of the chain, then secure the quick link onto the fixture loop.
- 11** Unscrew the collar nut from the screw collar, then install the collar nut, and the canopy onto the chain (in that order).
- 12** Install the small quick link onto the remaining end of the chain, then secure the quick link onto the screw collar
- 13** Weave the cord through the chain, collar nut, canopy, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 14** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 15** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 16** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 17** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut onto the screw collar.
- 18** Install the shade by placing it into the shade base. Repeat for remaining shades.
- 19** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.