

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DLS17 NAME: Boat Linear Chandelier

MATERIAL TYPE: Coco

FINISH: White


SOCKET TYPE: Type B - Candelabra

SOCKET QTY: 6 pcs.

BULB WATTAGE: 40 Watts


VOLTAGE: 120V

ITEM NET WEIGHT: 33.44 LBS.

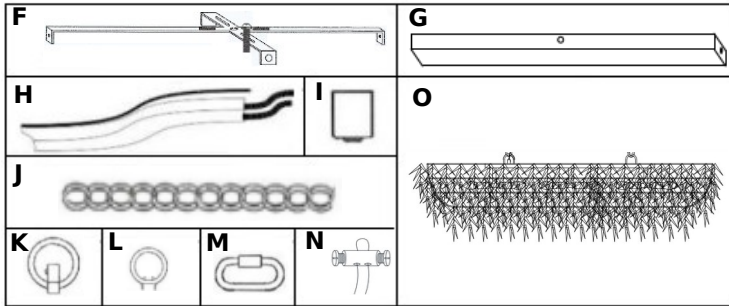

PARTS INCLUDED:

F) MOUNTING PLATE QTY: 1x	K) CANOPY LOOP QTY: 2x
G) CANOPY QTY: 1x	L) PENDANT LOOP QTY: 2x
H) FIXTURE WIRE QTY: 1x	M) QUICK LINKS QTY: 4x
I) SOCKET QTY: 6x	N) SAFETY CABLE QTY: 1x
J) CHAIN QTY: 2x	O) SHADE QTY: 1x



HARDWARE INCLUDED:

A) MOUNTING SCREWS 2x	D) STAR WASHERS 4x
B) CANOPY SCREWS 4x	E) GREEN GROUND SCREW 1x
C) PLASTIC WIRE CONNECTORS 3x	

TO INSTALL YOU WILL NEED


- 2 people recommended
- Ladder
- Phillips Screwdriver
- Wire Cutter / Stripper
- Plier
- Electrical Tape

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.

The lighting fixture is meant for indoor use. DRY LOCATIONS ONLY

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

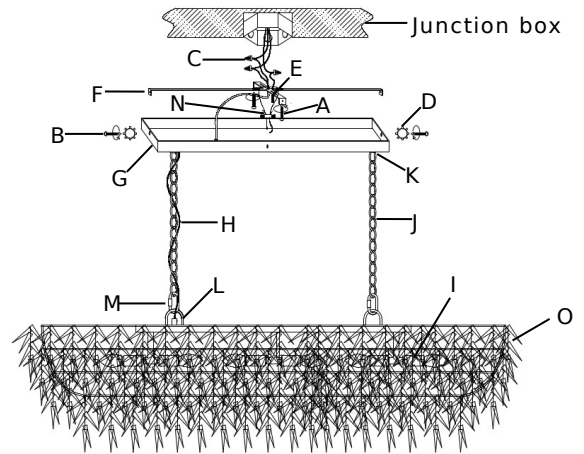

TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box / circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Remove mounting plate from the canopy by unscrewing the canopy screws.
NOTE: The safety cable will secure the fixture for the inspection of branch circuit connections after installation. The length of the lamp's fixture wires should be longer than the length of the safety cable.
5. Carefully inspect the pendant's fixture wires.
Neutral fixture wire: has ridges molded on the outside insulation
Hot fixture wire: has insulation that is smooth
Ground wire: bare copper wire
6. Wrap the fixture's bare ground wire around the green ground screw on the mounting plate, and tighten screw to secure the wire. Then connect this fixture's bare ground wire to the ground junction box wire (usually green insulation or bare wire) with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
7. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a plastic wire connector and wrap the connection with electrical tape.
8. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a plastic wire connector and wrap the connection with electrical tape.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
9. Gently tuck the wire connections neatly into the ceiling junction box.
10. Place the mounting plate over the center of the ceiling junction box.
11. Align holes in mounting plate with holes in junction box and attach with two mounting screws. Secure screws with a Phillips head screwdriver.
12. Attach the canopy to the mounting plate. Align the holes of the side portions of the mounting plate with the holes located in the side of the canopy. Using a screwdriver insert the canopy screws and star washers through each hole of the canopy and into threaded engagement with the mounting plate. Do not over-tighten the screws.
13. Restore power to junction box and test fixture. Insert six (6) 40-watt maximum Type B candelabra bulbs (not included) or six (6) 9-watt maximum compact fluorescent light bulbs (not included) or six (6) 4.5-watt maximum SBLed light bulbs (not included) into fixture. **DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.**

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.