

Urbandale Outdoor Wall (LED)**OL13700, OL13701, OL13702, OL13703-L1****1.1**

GENERATION LIGHTING

Outdoor**GENERAL PRODUCT INFORMATION:**


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

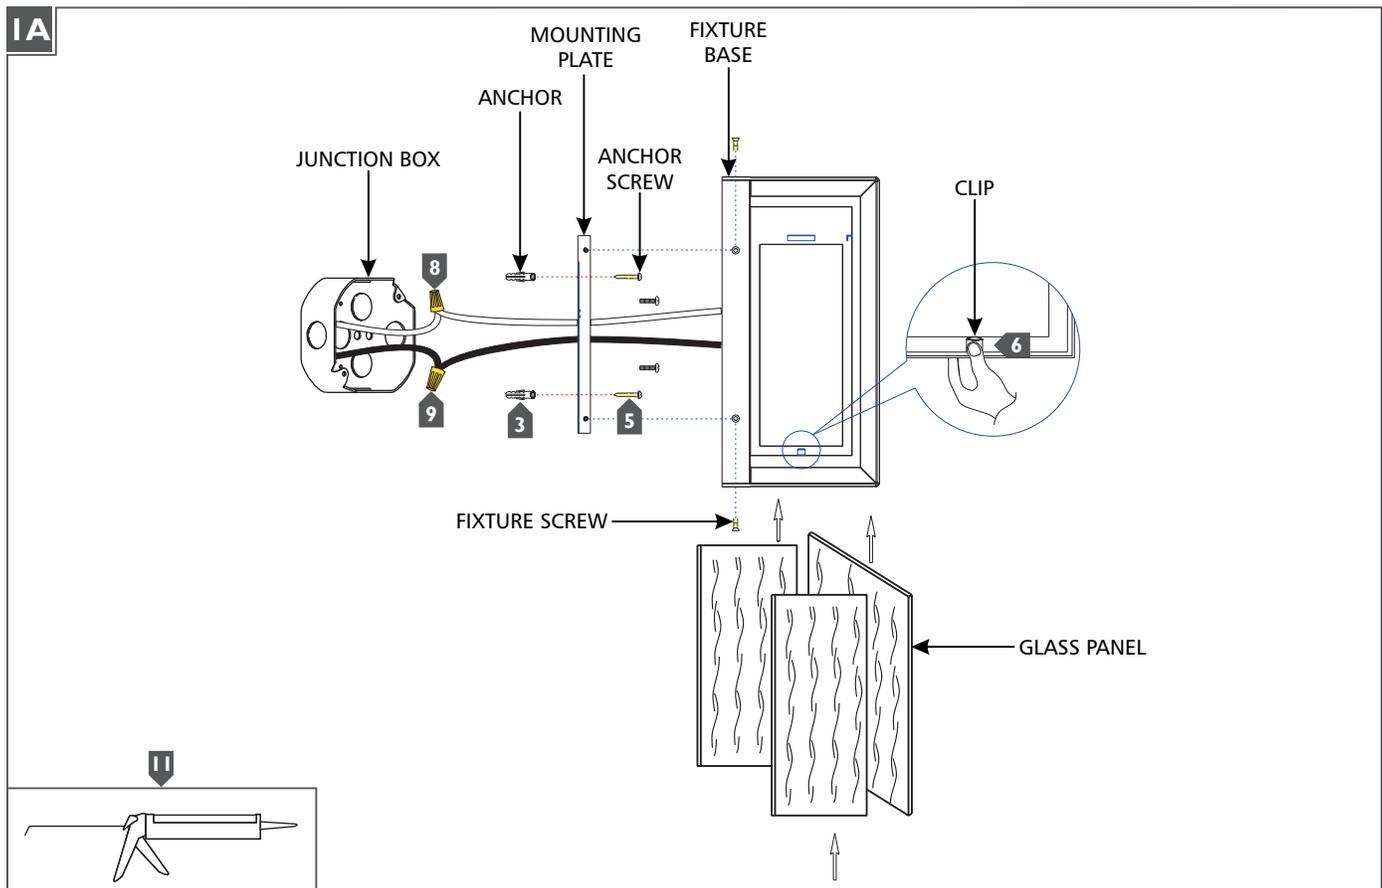

- 1** For Models OL13701, OL13702, and OL13703 Only: Temporarily install the mounting plate to the junction box.
- 2** For Models OL13701, OL13702, and OL13703 Only: Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3** For Models OL13701, OL13702, and OL13703 Only: Drill appropriate size holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box.
- 5** For Models OL13701, OL13702, and OL13703 Only: Screw the anchor screws into the anchors.
- 6** Insert the glass panels into the fixture and secure them in place using the clips.
- 7** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 8** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire to the hot power line wire with a wire nut.
- 10** Mount the fixture base onto the mounting plate and secure it with the fixture screws.
- 11** For wet locations, caulk around the base of the fixture with waterproof construction sealant.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.