

ASSEMBLY INSTRUCTIONS



CAUTION! Make sure electricity is off before and during installation or maintenance. The luminaire must be installed by a qualified professional in accordance with all applicable local regulations.

This luminaire is designed for indoor or sheltered use.

The location chosen for installation must support the weight of the product. If needed, secure the luminaire to structural elements such as beams and slabs. Installations in special locations require appropriate fixings.

Models **Lamp**
Ubatuba 1x E-26

Description: Ubatuba articable sconce

Composition: ceramics and aluminum

Instructions:

1) Remove the product's protective packaging, taking care not to damage any of the parts with sharp surfaces or objects.

Place the parts of the fixture on a horizontal surface to connect them; if needed, use the protection package to shield the surface and protect the parts from scratches or damage.

2) Turn off the electricity before starting to install.

3) Define the position of the rod (HA) on the wall where the luminaire will be installed. Level it and set the height and placement.

4) Position the two clamps (AB1) and (AB2), observing that the clamp (AB1) must be used at the bottom of the rod (HA), supporting the rod in the clamp (AB1). The clamp (AB2) should be fixed a little below the beginning of the curve of the rod (HA).

5) Considering the positioning of the clamps (AB1) and (AB2) on the wall, mark the holes.

6) Drill the holes using a drill and use 5/16" drills, inserting the plastic bushing on the holes, and fix the clamps with the rod (HA), using the screws (S).


7) Insert the energy cable (EC) of the pendant through the upper part of the rod (HA) and set the height of the dome (H), considering the size of the cable you want to leave exposed.

8) Use the strain relief (SR) to lock the energy cable (EC) at the bottom of the Clamp (AB1).

9) Use the screw (S1) located in the center of the clamp (AB1) to position and fix the rod (HA). If you want the rod to move to both sides, do not tighten the screw (S1).

10) Connect the energy cables (EC) to the switch according to the drawing. (insert detail).

11) Install the bulb lamp (not supplied), plug the energy cable (EC) into the outlet, turn on the power and your luminaire is ready for use.

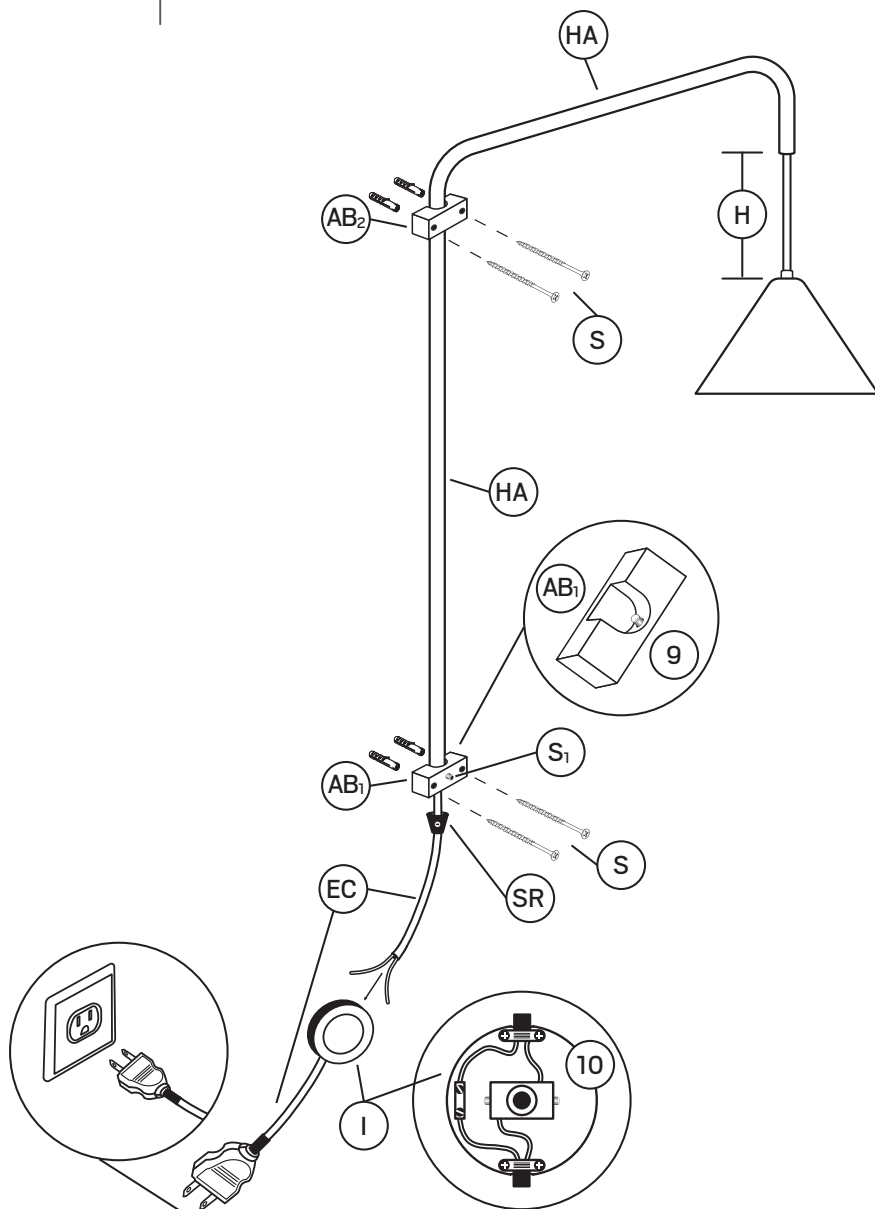

ATTENTION! Failure to comply with the instructions in this manual may cause accidents and void the product warranty. It is recommended that you read these instructions completely and carefully before proceeding. Make sure that the rated voltage requirements of the luminaire are compatible with the electric supply. Improper installation may cause property damage, fire, personal injury, or death. This Installation Manual is intended only for qualified electricians with proven knowledge about electrical installations and should be used as a manual for installing luminaires. All manufacturer's instructions accompanying the product must be followed. We stress the need for knowledge about electrical installation; hire an electrician.

Save these instructions for future reference.

Geo Contemporary warrants coverage against manufacturing defects, including electrical components and finishes, for a period of 3 years under normal conditions of use from the date of purchase. For warranty service contact your local dealer for more information. Proof of purchase date will be required for warranty validation.

The Manufacturer's responsibility regarding the product warranty is related to the correct observation of the instructions contained in this Manual. The Manufacturer is not responsible for any damages to the product caused by accidents, alterations of any nature, misuse, or improper installation. See our website for more details on warranty conditions.