

RONDE SMALL, MEDIUM, & LARGE ONE LIGHT OUTDOOR WALL LANTERNS

GLO1061DL; GLO1071DL; GLO1081DL

General Product Information



SAVE THESE INSTRUCTIONS!



NEC COMPLIANT JUNCTION BOX



WET LOCATION SAFE



DARK SKY FRIENDLY



PLEASE SEE [visualcomfort.com](http://visualcomfort.com) FOR PRODUCT SPECS



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Tools Required/Suggested



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER




CAULK GUN

Safety Information

**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

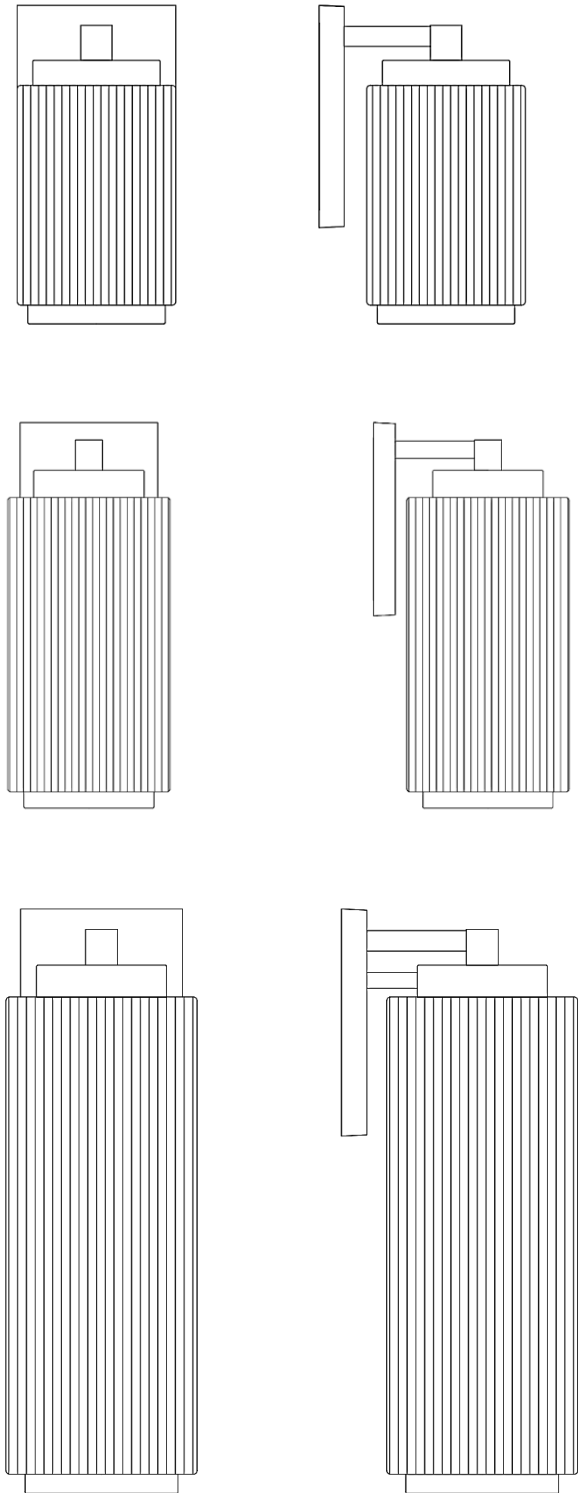

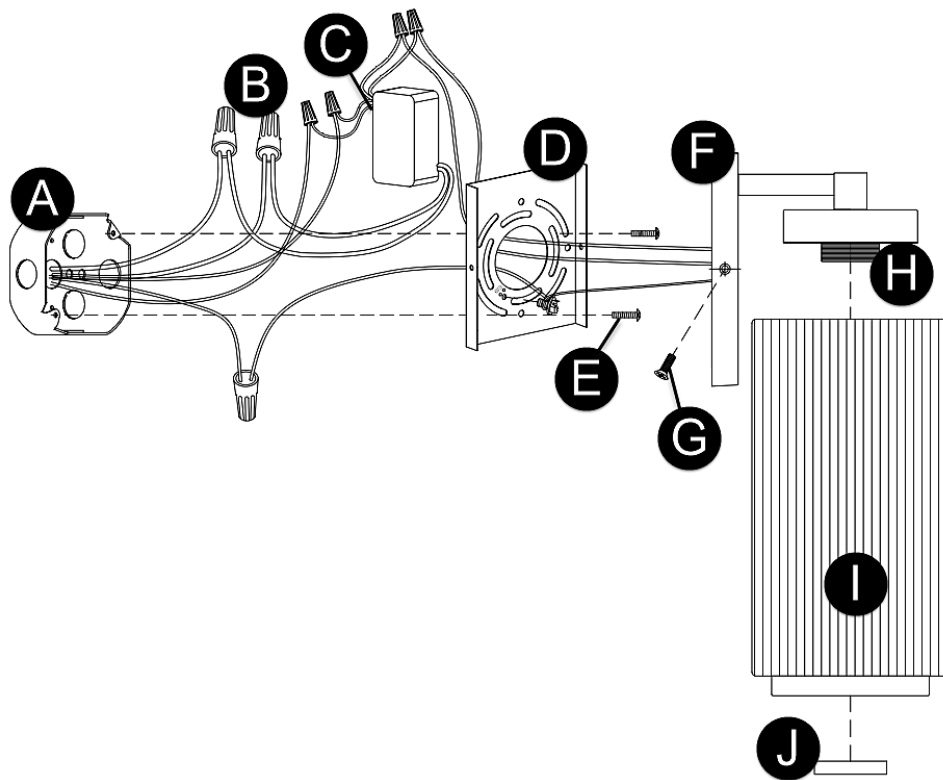

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Fixture Base
- G. Fixture Screws
- H. Shade Base
- I. Glass Shade
- J. Counter Ring

## INSTRUCTIONS

### I. Preparing the Fixture

1. Remove the mounting plate from the fixture base.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Neutral driver wire (white) to neutral power line wire
  - b) Hot driver wire (black) to hot power line wire
3. Place the driver in the junction box. Ensuring the driver output wires are accessible, secure the mounting plate to the junction box using the mounting screws
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Black (negative) driver wire (output) to blue (negative) fixture wire
  - b) Red (positive) driver wire (output) to red (positive) fixture wire
6. Carefully tuck all the wires behind the mounting plate.

### III. Installing the Fixture

1. Mount the fixture base onto the mounting plate and secure it in place by installing the fixture screws.
2. Secure the glass shade to the shade base with the counter ring.
3. For wet locations, caulk around the base of the fixture with waterproof construction sealant.