

LARSON SMALL, MEDIUM, & LARGE FLUSH MOUNTS

GLF1002; GLF1013; GLF1023

General Product Information



Intertek



SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



BULB(S) (NOT INCLUDED)



CONVERTS TO LED



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty




FCC Statement


Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



PENCIL/MARKER




WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

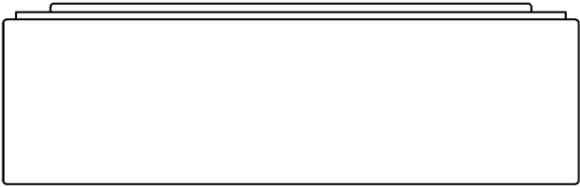

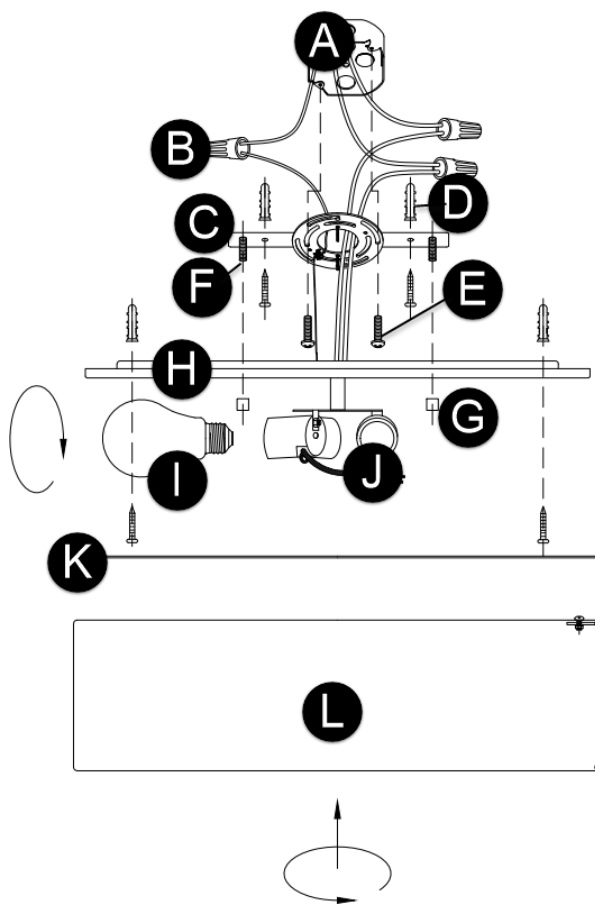

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Anchors & Screws
- E. Mounting Screws
- F. Mounting Studs
- G. Cap Nuts
- H. Fixture Base
- I. Bulb(s) (Not Included)
- J. Socket(s)
- K. Diffuser
- L. Shade

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, install the mounting studs with their heads facing the junction box and in alignment with the holes in the fixture base so that they protrude downward.
2. Install the anchors as follows:
 - a) Place the mounting plate on the junction box to trace and mark the locations for the anchor holes.
 - b) Use an electric drill to drill the marked holes.
 - c) Insert the anchors into the holes.
 - d) Install the mounting plate onto the junction box with the mounting screws and further secure it on the ceiling with the anchor screws.
3. For GLF1023 only, place the fixture base onto the mounting studs to trace and mark the locations for the fixture base anchor holes. Use an electric drill to drill the marked holes and insert the anchors into the holes.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Align the holes in the fixture base with the mounting studs on the mounting plate and push upwards so that they poke through the holes in the fixture base.
2. Secure the fixture base to the mounting plate by screwing the cap nuts on the mounting studs.
3. For GLF1023 only, further secure the fixture base onto the ceiling by screwing the anchor screws into the fixture base anchor holes.
4. Screw the bulb into the socket assembly. Refer to the socket label for max wattage information.
5. Gently slide the diffuser into the shade. Align the shade's top screws with the keyholes on the fixture base and twist to secure the shade in place.