

# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

ITEM NO.:DMC37

NAME: Tebaldi Chandelier

MATERIAL TYPE: Iron, Glass

FINISH: Antique Brass, clear etched glass


SOCKET TYPE: E12

SOCKET QTY: 8

BULB WATTAGE: 60W /13W CFL/8W LED

VOLTAGE: 110V-120V

ITEM NET WEIGHT: 36.82LBS

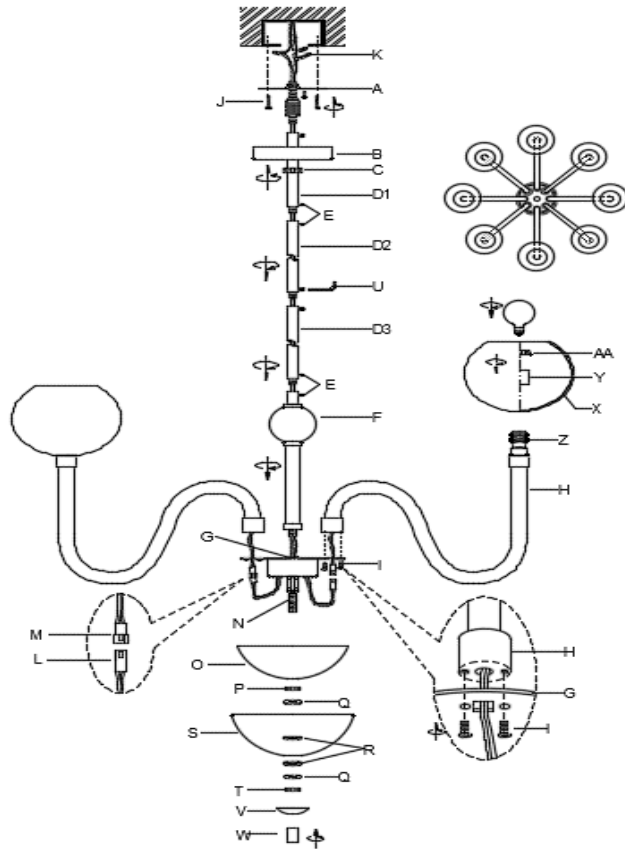

## PARTS INCLUDED:

Mounting Plate (A)	Qty: 1PC	Metal Bowl (O)	Qty: 1PC
Canopy (B)	Qty: 1PC	Screw Nut 1 (P)	Qty: 1PC
Collar Loop (C)	Qty: 1PC	Metal Washer (Q)	Qty: 2PCS
Rod (D)	Qty: 3PCS	Plastic Washer (R)	Qty: 2PCS
Hex Screw (E)	Qty: 7PCS	Bottom Glass Bowl (S)	Qty: 1PC
Glass Column (F)	Qty: 1PC	Screw Nut 2 (T)	Qty: 1PC
Lamp Body (G)	Qty: 1PC	Metal Plate (V)	Qty: 1PC
Glass Arm (H)	Qty: 8PCS	Finial (W)	Qty: 1PC
Screws (I)	Qty: 16PCS	Glass Shade (X)	Qty: 8PCS
Male Plug (L)	Qty: 8PCS	Lamp Cup (Y)	Qty: 8PCS
Female Plug (M)	Qty: 8PCS	Socket (Z)	Qty: 8PCS
Threaded Nipple (N)	Qty: 1PC	Socket Ring (AA)	Qty: 8PCS

## HARDWARE INCLUDED:

Mounting Screws (J)	Qty: 2PCS	Allen Wrench (U)	Qty: 1PC
Plastic Wire Connector (K)	Qty: 3PCS		

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



## TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Please be sure you have all parts indicated before you begin assembly.
4. Gently pull wiring down from ceiling junction box and allow to hang.
5. Put the central glass column(F) on lamp body( G) and secure in a clockwise direction till tight.
6. Then connect central glass column (F) and canopy (B) with rod (D1,D2,D3), when you connect the rods, loosen the small hex screws (E) first then tighten with Allen wrench(U) after all rods are connected. Be sure all the hexangular screws are tight enough.
7. Remove the mounting plate(A) from the canopy(B) by unscrewing the collar loop(C).
8. Connect lamp body (F) and canopy (B) with rod (D1,D2,D3,D4), loosen the small hex screws (E) first then tighten with Allen wrench (U), after all rods are connected. Be sure all the hexangular screws are tight enough. Note: if you want the fixture to be semi-flush mount, you only need connect lamp body (F) and canopy (B) with rod (D4).
9. Attach the mounting plate (A) to the outlet box by using the mounting screws(J).
10. **Carefully inspect the pendant's fixture wires. Neutral fixture wire: white hot fixture wire: black ground wire: green**
11. Wrap ground wire of lamp body and ground wire of junction box together and fasten together with a plastic wire connector (K) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (A) facing down, and wrap the fixture's bare ground wire around the ground screw.
12. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire connector (K) and wrap the connection with electrical tape.
13. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (K) and wrap the connection with electrical tape. Be sure no wire strands are exposed. **Do not reverse the hot and neutral connections or safety will be compromised.**
14. Gently tuck the wire connections neatly into the ceiling junction box.
15. Attach the mounting plate (A) with nipple to the ceiling outlet box using the enclosed mounting screws (J) and tighten screws with a screwdriver.
16. Push collar loop(C) up to canopy (B) and tighten onto nipple in mounting plate (A) by turning in a clockwise to secure canopy.
17. Pass through the wire into the hole of the lamp body (G) and insert the glass arm (H) into the lamp body (G), then secure the glass arm (H) with 2 screws (I). Tighten screws (I) with a screwdriver. Repeat the same operation for the other glass arms.
18. Connect each wire from glass arm to lamp body by connect female plug (M) from glass arm to the male plug (L) from lamp body.
19. Screw the threaded nipple(N) on the lamp body (G) till tight, then attached the metal bowl (O) to the threaded nipple(N) and secure by screw nut 1(P).
20. Put the metal washer (Q), plastic washer(R), bottom glass bowl(S), plastic washer (R), metal washer (Q) and screw nut 2 (T) into the threaded nipple (N) in turn. Then secure glass bowl(S) by screw nut 2 (T).
21. Attached metal plate (V) on the the threaded nipple(N) and fix by finial (W).
22. Attach the glass shade (X) \ **lamp cup (Y)** and socket ring (AA) onto the glass arm (H), tighten and socket ring (AA) clockwise on the socket (Z) of the glass tube. Repeat the same operation for the other glass arms.
23. Insert 8 type g 60w bulb (or CFL 13w or LED 10w, not included) into the socket ring (Y). **Do not exceed specified wattage.**
24. Restore power to the junction box and test fixture.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS