

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: DFC38

NAME: FLORKO MINI FLUSH MOUNT

MATERIAL TYPE: IRON, ACRYLIC

FINISH: GOLD,FROST

SOCKET TYPE:LED


SOCKET QTY: 2

BULB WATTAGE: 8.0W/2700K/90+CRI

VOLTAGE:110-277V

ITEM NET WEIGHT:1.1 LBS

PLEASE IGNORE THIS DEVICE IN

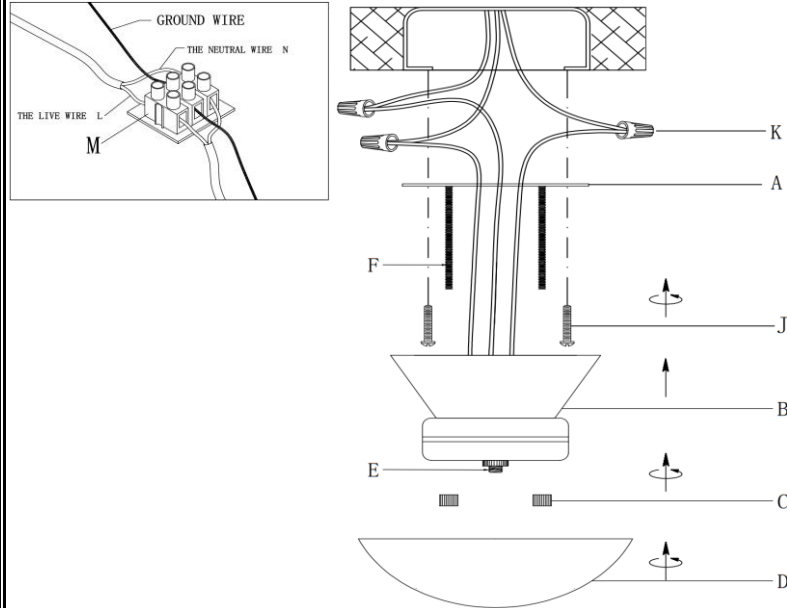

PARTS INCLUDED:

Mounting Plate (A)	Qty: 1 Pc
Lamp Base (B)	Qty: 1 Pc
Screw Nut (C)	Qty: 2Pcs
Metal Shade (D)	Qty: 1 Pc
Threaded Rod (F)	Qty: 2 Pcs

HARDWARE INCLUDED:

Mounting Screws (J)	Qty: 2 Pcs
Plastic Wire Cap (K)	Qty: 3 Pcs

TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.



We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Before mounting, remove the metal shade(D) ,Screw nut (C) and the mounting plate (A) from lamp base (B) by rotating them counterclockwise carefully.
3. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly carefully.
4. Connect ground wire from ceiling to ground wire from lamp using the wire caps (K).
5. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(K) . DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
6. PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE TERMINAL BLOCK (M) IN THE LAMP BASE. IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.
7. Place the mounting plate(A) over the center of the ceiling junction box.
8. Align holes in mounting plate(A) with holes in junction box and attach with two mounting screws(J). Secure mounting screws with a Phillips head screwdriver.
9. Attach lamp base(B) to the threaded rod(F) to go through the holes in lamp base, then using screw nut(C) to secure.
10. Put and assemble the metal shade(D) with the lamp base(B) by turning in a clockwise direction until tight.
11. Restore power to junction box and test fixture.

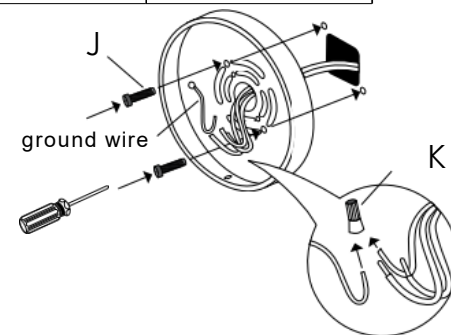

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

ARTERIO RS

WARNING:

INSTALL BEFORE RESTORING POWER AT THE BREAKER

LOW VOLTAGE LED DRIVER INSIDE.

DO NOT APPLY POWER AT THE BREAKER
OR SWITCH UNTIL FIXTURE IS FULLY INSTALLED.
FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT
IN MALFUNCTION AND WILL VOID WARRANTY.