


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO: GDDPI01	NAME: Egg Drop Pendant
MATERIAL TYPE: Brass	FINISH: Brass/Antique Brass
SOCKET TYPE: E26	SOCKET QTY: 1
BULB WATTAGE: 40W/CFL 10W/LED 9W	
VOLTAGE: 110-120V	ITEM NET WEIGHT: 14LBS

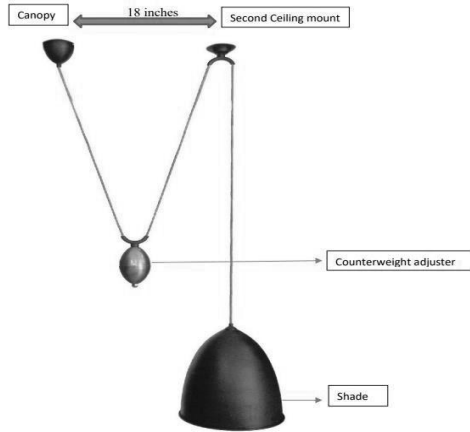

PARTS INCLUDED:

Shade	Qty: 1
Mounting Plate	Qty: 1
Canopy	Qty: 1
Counterweight Adjuster	Qty: 1
Ceiling Mount	Qty: 1

HARDWARE INCLUDED:


Mounting Screws	2
Plastic Wire Connector	2
Green Ground Screw	1

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures

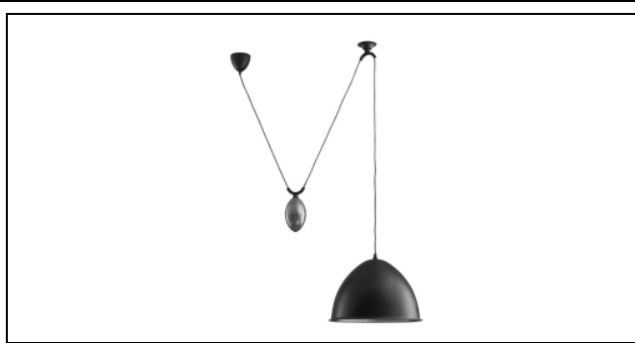

TO ASSEMBLE:

- Shut off the main electrical supply from the main fuse box/circuit breaker and unpack all fixture parts and hardware.**
- Gently pull wiring down from ceiling junction box and allow it to hang and remove mounting plate from the canopy by unscrewing the collar.
- Carefully inspect the pendant's fixture wires.
Neutral fixture wire: White
Hot fixture wire: Black
Ground wire: Green
- Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
- Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire nut and wrap the connection with electrical tape.
- Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire nut and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- Gently tuck the wire connections neatly into the ceiling junction box.
- Place the mounting plate over the center of the ceiling junction box.
- Align holes in mounting plate with holes in junction box and attach with two mounting bolts. Secure bolts with a Phillips head screwdriver.
- Push canopy up over the mounting plate until it flushes with the ceiling.
- Push collar through hole in canopy and thread onto nipple on the mounting plate. Secure by turning collar clockwise until canopy is flushed with the ceiling.
- Install the second ceiling mount with the help of mounting screws (provided) at the location of the pendant as the shade hangs down from it.
- Distance between second ceiling mount and canopy should be **18"** to allow the counterweight adjuster to function properly as shown in the image. No extra weight should be placed on the shade or the counterweight adjuster to avoid any damage to the cable.
- Restore power to junction box and test fixture.
Insert **(1) 40- Watt maximum E26 Type A** bulb into fixture.
DO NOT EXCEED SPECIFIED WATTAGE OF FIXTURE.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

A R T E R I O R S