ASSEMBLY INSTRUCTIONS

ARTERIORS

ITEM DESCRIPTION:

ITEM NO.: DMS26

NAME: Aegis Chandelier

MATERIAL TYPE: STAINLESS STEEL, VELLUM

FINISH: BRONZE, ANTIQUE BRASS, VELLUM

SOCKET TYPE: E12


SOCKET QTY: 6


BULB WATTAGE: 25W / 4W LED

VOLTAGE: 100V-120V

ITEM NET WEIGHT:



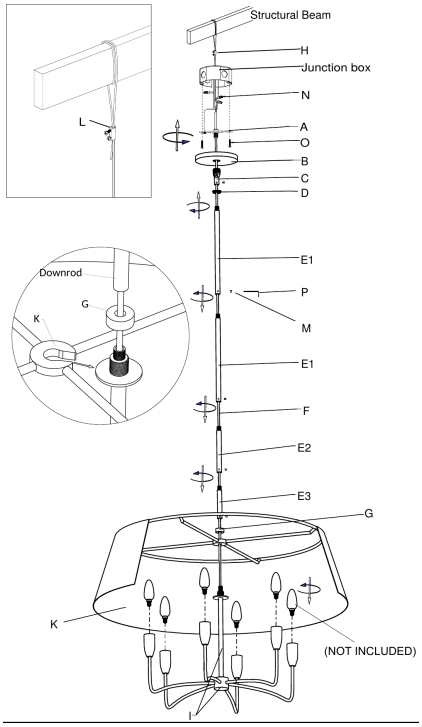

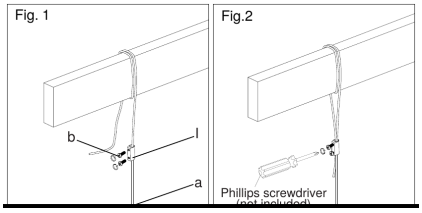

PARTS INCLUDED:

Mounting Plate (A)	1	Power Wire (F)	1
Canopy (B)	1	Shade Collar (G)	1
Hang Straight (C)	1	Cable Grip (H)	1
Canopy Collar (D)	1	Light Fixture (I)	1
12" Downrod (E1)	2	Shade (K)	1
6" Downrod (E2)	1	4" Downrod (E3)	1

HARDWARE INCLUDED:

Set Screw (M)	5	Mounting Screw (O)	2
Wire Nut (N)	3	Allen Key (P)	1

TO INSTALL YOU WILL NEED:

• 2 people recommended • Phillips screwdriver • Electrical tape

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Carefully unpack all parts and hardware and lay them on a soft surface.
3. Check that you have all the parts listed before you begin.
4. Remove the shade collar (G) from the light fixture (I), place the shade (K) on the light fixture (I), then secure it with the shade collar (G).
5. Loosen all set screws (M) on the downrods (E1, E2, E3) and the hang straight (C) with the Allen key (P). Feed the power wire (F) through the downrods, canopy collar (D), hang straight (C), canopy (B) and mounting plate (A). NOTE: Choose which downrods to use to set the fixture height.
6. Thread the downrods onto the light fixture (I) clockwise, then tighten the set screws (M) with the Allen key (P). Make sure all set screws are tight.
7. Attach the hang straight (C) to the top downrod and tighten its set screw (M) with the Allen key (P).
8. Attach the mounting plate (A) to the hang straight (C).
9. Turn the canopy collar (D) counterclockwise and carefully slide the canopy (B) down.
10. Carefully hang the fixture on the junction box: align the slots in the mounting plate (A) with the threaded holes in the junction box and secure with the mounting screws (O).
11. Install the safety cable as shown below (Fig. 1 and Fig. 2).
12. Gently pull the wires down from the junction box and let them hang. Identify the fixture's neutral, hot and ground wires.
13. Wrap the fixture ground wire around the ground screw on the mounting plate and tighten the screw. Connect the remaining ground wire to the junction box ground wire (usually green) with a wire nut (N) and wrap with electrical tape.
14. Connect the neutral fixture wire to the neutral junction box wire (usually white) with a wire nut (N) and wrap with electrical tape.
15. Connect the hot fixture wire to the hot junction box wire (usually black) with a wire nut (N) and wrap with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

16. Gently tuck all connections into the junction box. Align the canopy (B) with the hang straight (C) and secure it by turning the canopy collar (D) clockwise.
17. Insert one Type B bulb, max 25W (or 4W LED), not included, into each socket. Do not exceed the maximum wattage.
18. Restore power at the breaker and test the fixture.

TO INSTALL SAFETY CABLE:

1. Remove the set screws (b) from the cable grip (H).
2. Wrap the safety cable (a) around a structural beam of the building (Fig. 1).
3. Feed the safety cable (a) back through the cable grip (H) and secure it with the set screws (b), using a Phillips screwdriver (Fig. 2).

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150