
ASSEMBLY INSTRUCTIONS

ARTERIORS

ITEM DESCRIPTION:

ITEM NO.: DWS07	**NAME:** Aegis Wall Sconce
MATERIAL TYPE: STAINLESS STEEL, VELLUM	**FINISH:** ANTIQUE BRASS, STAINED VELLUM
SOCKET TYPE: E12	**SOCKET QTY:** 2
BULB WATTAGE: 25W / 4W LED	**VOLTAGE:** 100V-120V
ITEM NET WEIGHT:	



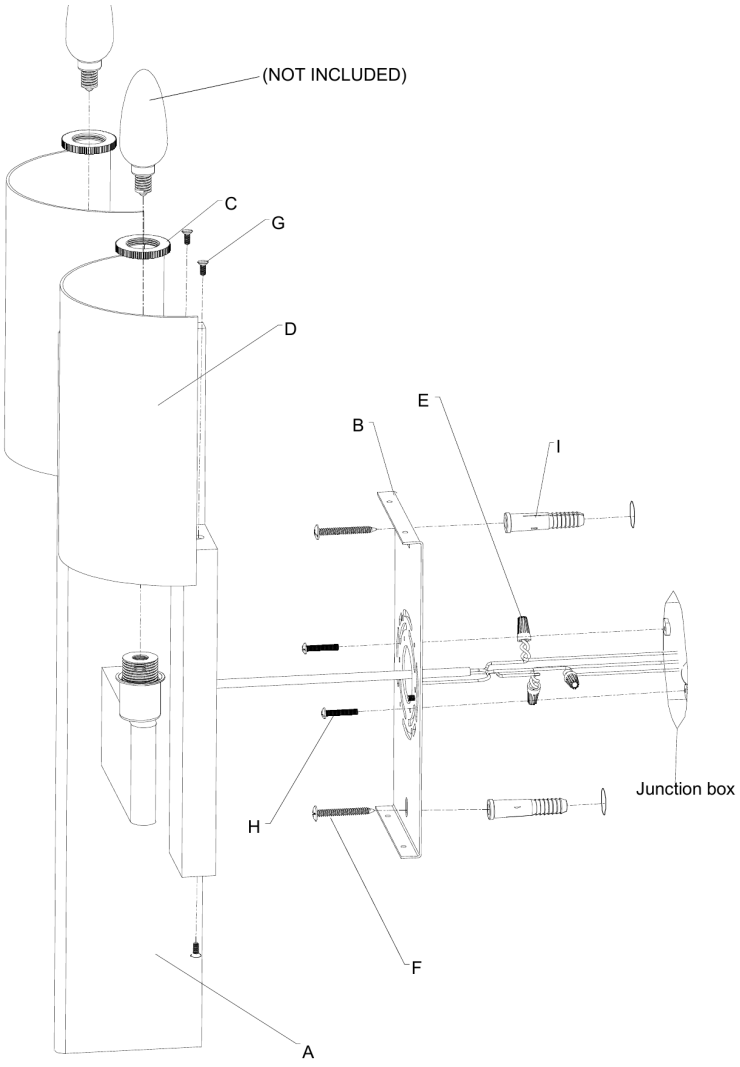

PARTS INCLUDED:

Light Fixture (A)	1	Shade Ring (C)	2
Mounting Plate (B)	1	Shade (D)	2

HARDWARE INCLUDED:

Wire Nut (E)	3	Mounting Screw (H)	2
Anchor Screw (F)	2	Wall Anchor (I)	2
Canopy Screw (G)	4		

TO INSTALL YOU WILL NEED:

• 2 people recommended • Phillips screwdriver • Electrical tape • Pencil

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Carefully unpack all parts and hardware and lay them on a soft surface.
3. Check that you have all the parts listed before you begin.
4. Place the mounting plate (B) over the center of the junction box and align its holes with the junction box holes. Mark the 2 wall-anchor holes on the wall with a pencil. At each mark, drill a hole slightly smaller than the wall anchor (I) and insert a wall anchor (I).
5. Loosely attach the mounting plate (B) to the junction box with the 2 mounting screws (H), using a Phillips screwdriver. Secure the plate to the wall anchors (I) with the 2 anchor screws (F), then fully tighten the mounting screws.
6. Gently pull the wires down from the junction box and let them hang. Identify the fixture's neutral, hot and ground wires.
7. Wrap the fixture ground wire around the ground screw on the mounting plate and tighten the screw. Connect the remaining ground wire to the junction box ground wire (usually green) with a wire nut (E) and wrap with electrical tape.
8. Connect the neutral fixture wire to the neutral junction box wire (usually white) with a wire nut (E) and wrap with electrical tape.
9. Connect the hot fixture wire to the hot junction box wire (usually black) with a wire nut (E) and wrap with electrical tape.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

10. Gently tuck all connections into the junction box.
11. Fit the light fixture (A) onto the mounting plate (B) and secure it with the 4 canopy screws (G), using a Phillips screwdriver.
12. Place each shade (D) on its socket by fitting the shade's UNO fitter over the socket, then secure it with a shade ring (C).
13. Insert one Type B bulb, max 25W (or 4W LED), not included, into each socket. Do not exceed the maximum wattage.
14. Restore power at the breaker and test the fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150