ASSEMBLY INSTRUCTIONS

ARTERIORS

ITEM DESCRIPTION:

ITEM NO.: DWC111

NAME: Tindra Wall Sconce

MATERIAL TYPE: IRON, GLASS

FINISH: CHATTERED ENGLISH BRONZE, SMOKE

SOCKET TYPE: Integrated LED

SOCKET QTY: 1


BULB WATTAGE: 10W/2700K/90+CRI


VOLTAGE: 100V-130V


ITEM NET WEIGHT: 9.9 LBS




TERMINAL BLOCK: EUROPEAN WIRING ONLY. DO NOT USE.



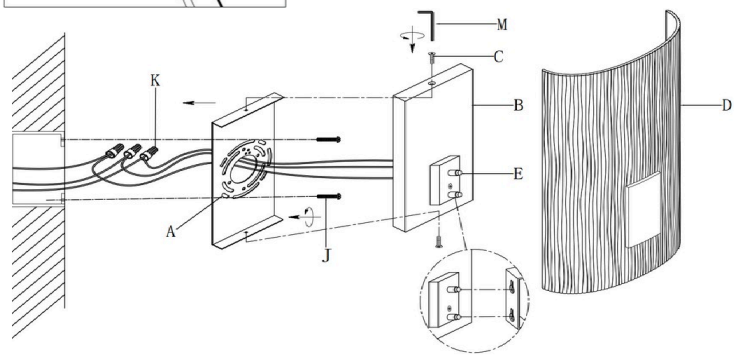





PARTS INCLUDED:

Mounting Plate (A)	1	Glass Shade (D)	1
Lamp Base (B)	1	Hang Pole (E)	2
Canopy Screw (C)	2		

HARDWARE INCLUDED:

Mounting Screw (J)	2	Plastic Wire Cap (K)	3
Allen Wrench (M)	1		

TO INSTALL YOU WILL NEED:

· Phillips Screwdriver

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Attach the mounting plate (A) to the junction box or wall with the mounting screws (J).
3. Connect the fixture ground wire (bare) to the junction box ground wire (usually green or bare) with a wire connector (K) and wrap with electrical tape. If there is no ground wire in the box, attach the fixture ground wire to the green ground screw on the mounting plate (A).
4. Connect the white (neutral) fixture wire to the white junction box wire with a wire connector (K) and wrap with electrical tape.
5. Connect the black (hot) fixture wire to the black junction box wire with a wire connector (K) and wrap with electrical tape. Make sure no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

6. The terminal block in the lamp base is for European wiring only. Do not connect any wires to it.
7. Gently tuck all connections into the junction box.
8. Attach the lamp base (B) to the mounting plate (A) by inserting the canopy screws (C) through the pre-drilled holes. Tighten with the Allen wrench (M).
9. Carefully hang the glass shade (D) on the two hang poles (E) and make sure it is secure.
10. Restore power at the breaker and test the fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150



WARNING

INSTALL BEFORE RESTORING POWER AT THE BREAKER

LOW VOLTAGE LED DRIVER INSIDE

DO NOT APPLY POWER AT THE BREAKER OR SWITCH
UNTIL THE FIXTURE IS FULLY INSTALLED.
FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT
IN MALFUNCTION AND WILL VOID THE WARRANTY.