
ASSEMBLY INSTRUCTIONS

ARTERIORS

ITEM DESCRIPTION:

ITEM NO.: DFC46	**NAME:** Patera Flush Mount
MATERIAL TYPE: IRON, TPU	**FINISH:** HAMMERED ENGLISH BRONZE, WHITE
SOCKET TYPE: E12	**SOCKET QTY:** 6
BULB WATTAGE: LED BULB 4W	**VOLTAGE:** 110V-120V
ITEM NET WEIGHT: 6.38 LBS	



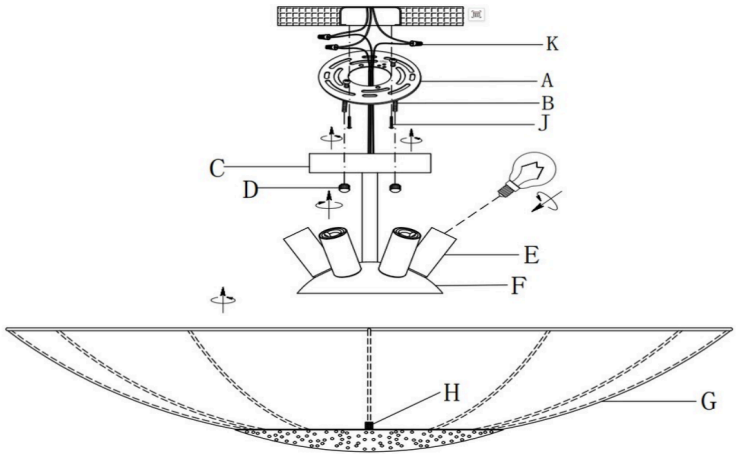

PARTS INCLUDED:

Mounting Plate (A)	1	Plate Screw (B)	2
Canopy (C)	1	Screw Nut (D)	2
Socket (E)	6	Lamp Assembly (F)	1
Vellum Shade (G)	1	Screw Nut Pipe (H)	1

HARDWARE INCLUDED:

Mounting Screw (J)	2	Green Ground Screw	1
Plastic Wire Connector (K)	3		

TO INSTALL YOU WILL NEED:

• 2 people recommended • Phillips screwdriver

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Carefully unpack all parts and hardware and lay them on a soft surface.
3. Gently pull the wires down from the junction box and let them hang.
4. Remove the mounting plate (A) from the canopy (C) by unscrewing the screw nuts (D).
5. Attach the mounting plate (A) to the junction box with the two mounting screws (J), using a Phillips screwdriver.
6. Connect the fixture ground wire (bare) to the junction box ground wire (usually green or bare) with a wire connector (K) and wrap with electrical tape. If there is no ground wire in the box, attach the fixture ground wire to the green ground screw on the mounting plate (A).
7. Connect the white (neutral) fixture wire to the white junction box wire with a wire connector (K) and wrap with electrical tape.
8. Connect the black (hot) fixture wire to the black junction box wire with a wire connector (K) and wrap with electrical tape. Make sure no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

9. Gently tuck all connections into the junction box.
10. Push the canopy (C) up over the mounting plate (A) until it is flush with the ceiling, then secure it by turning the screw nuts (D) clockwise onto the plate screws (B).
11. Insert six Type G 4W LED bulbs (not included) into the sockets (E). Do not exceed the maximum wattage.
12. Carefully turn the vellum shade (G) clockwise onto the lamp assembly (F) until secure.
13. Restore power at the breaker and test the fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150