

Scala Flush Mount

Assembly Guide



In Common With

Scala Flush Mount

incommonwith.com

Thank you for choosing In Common With. Please confirm that you received all of the components pictured in this guide, and reach out to us if anything is missing. It's rare, but it happens. We hope you enjoy your fixture. With proper care, it should last a lifetime.

Have questions? Please contact us at support@incommonwith.com.




CAUTION!

Electrical shock risk. Turn off electrical power at the main fuse box or circuit panel before beginning installation, servicing the light, or installing accessories. We recommend working with a qualified electrician familiar with the type of work you'd like done.


ATTENTION!

Risque de choc électrique. Coupez l'alimentation électrique au niveau de la boîte à fusibles principale ou du panneau de circuits avant de commencer l'installation, l'entretien de la lumière ou l'installation d'accessoires. Nous vous recommandons de travailler avec un électricien qualifié familier avec le type de travail que vous souhaitez effectuer.


Lyra Sconce
Components

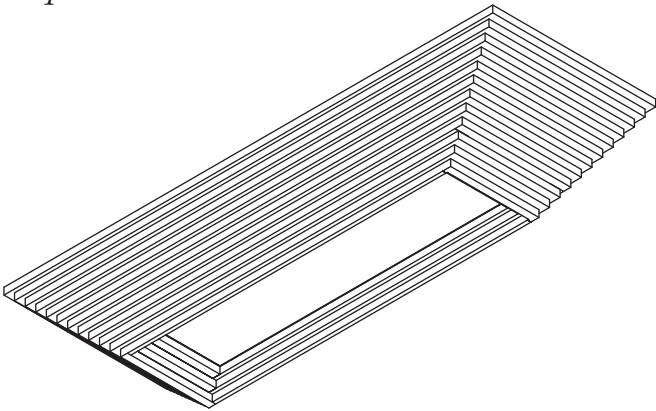

Scala Flush Mount Assembly

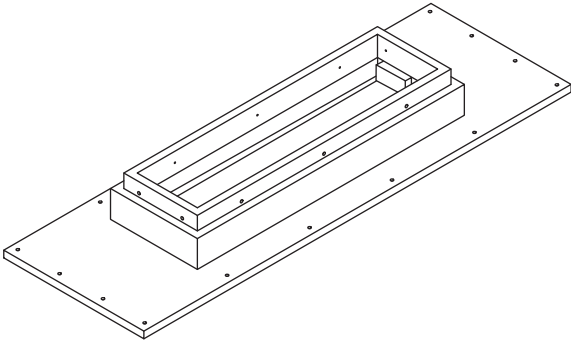

Canopy Cover & Driver

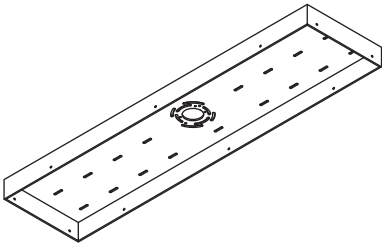

Backplate



Canopy Screws (10)




Canopy Cover Screws (16)



5/32" Hex Drill Bit




9/64" Hex Drill Bit




Hardware Pack

Step 1

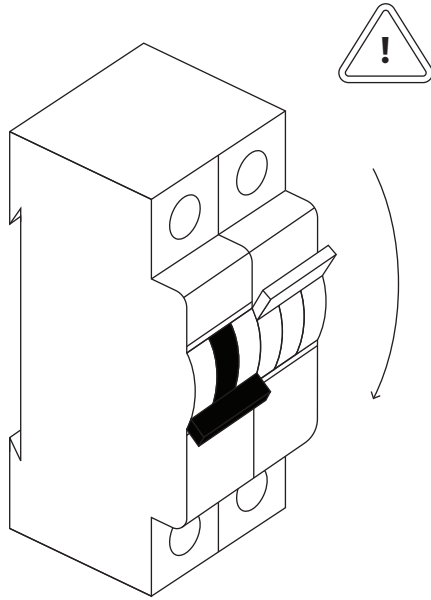


Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

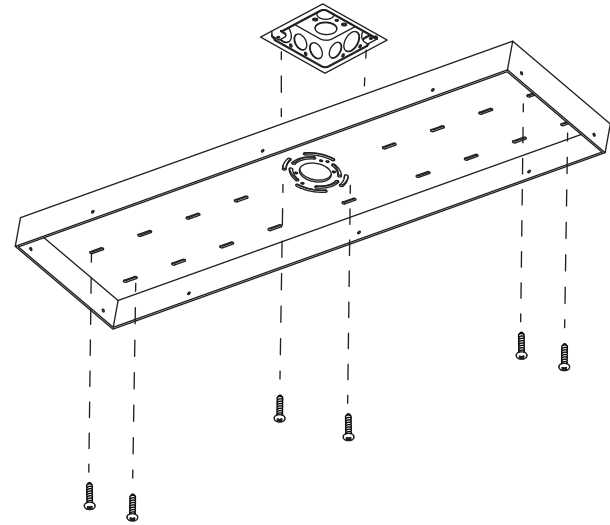


Mount the backplate to the junction box on ceiling using a Phillips head screwdriver to tighten the mounting screws. For additional support, mount the backplate to the ceiling using anchors appropriate for your ceiling material.

Step 3

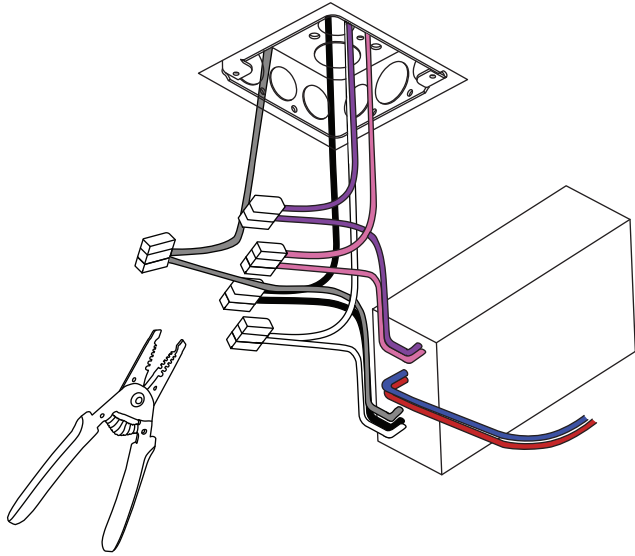


Use the wago clips to connect the drivers wires (located inside the canopy cover) to the corresponding wires from the junction box in the ceiling. White wire is neutral and the black wire is live. Connect the Green/Yellow wire to the grounding wire in the junction box. If you are using 0-10V dimming connect the pink and purple wires to the dimming system. If you are using TRIAC or ELV dimming, simply cap the wago on the ends of the purple and pink wire. If needed, use a wire stripper to remove 3/8" insulation from each wire before inserting them into the corresponding wago clip. Leave the driver in place inside the canopy cover with the red and blue wires accessible.

Step 4

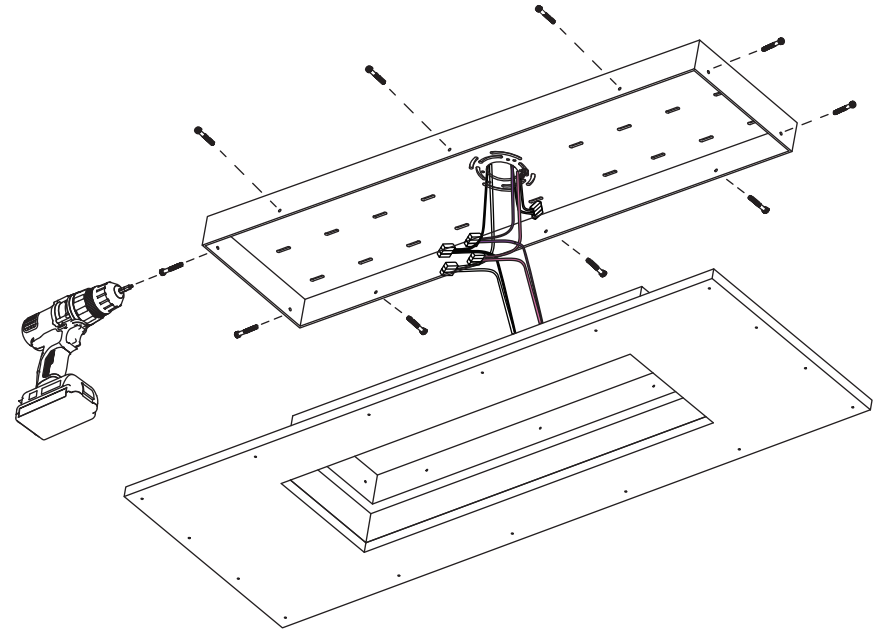


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place using the canopy screws, a drill and the 5/32" Hex drill bit provided.

Step 5

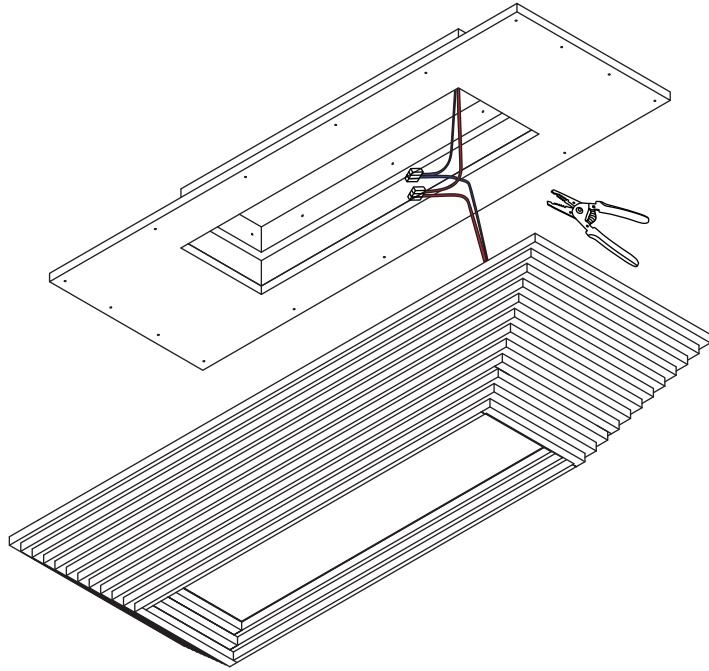


Use the wago clips to connect the fixtures wires to the corresponding wires from the driver. Remember that blue/black is neutral while red is live. Before inserting the wires into the corresponding clip, strip off 3/8" insulation from each wire if required.

Step 6

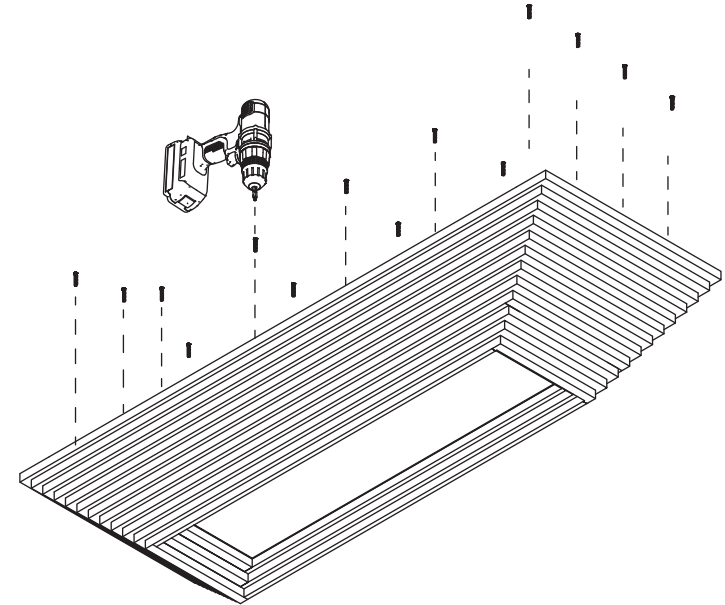

Align the holes of the canopy cover with holes on of the assembly. Secure them in place using a drill and the 9/64" Hex drill bit provided.

Step 7

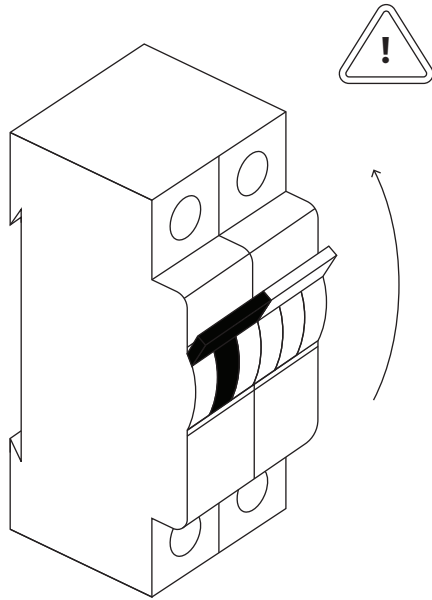

Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)

Never use scouring pads or abrasive cleaning solutions. If it comes in a bottle, it is bad for your fixture. Instead, we recommend using soft microfiber cloths, which are gentler on our products and the planet.

For Metal: Wipe with a damp or dry microfiber cloth. Please note that our brass is unlaquered, and will darken naturally over time.

For Glass: Wipe clear or colored glass with a damp microfiber cloth. For sandblasted or etched glass, use a dry microfiber cloth. Removable glass shades can be washed carefully in a sink using warm or hot water.

For Ceramic: Wipe with a damp microfiber cloth. Do not submerge in water.