

Ecco Surface Mount
Assembly Guide



In Common With

Ecco Surface Mount

incommonwith.com

Thank you for choosing In Common With. Please confirm that you received all of the components pictured in this guide, and reach out to us if anything is missing. It's rare, but it happens. We hope you enjoy your fixture. With proper care, it should last a lifetime.

Have questions? Please contact us at support@incommonwith.com.




CAUTION!

Electrical shock risk. Turn off electrical power at the main fuse box or circuit panel before beginning installation, servicing the light, or installing accessories. We recommend working with a qualified electrician familiar with the type of work you'd like done.


ATTENTION!

Risque de choc électrique. Coupez l'alimentation électrique au niveau de la boîte à fusibles principale ou du panneau de circuits avant de commencer l'installation, l'entretien de la lumière ou l'installation d'accessoires. Nous vous recommandons de travailler avec un électricien qualifié familier avec le type de travail que vous souhaitez effectuer.

Ecco Surface Mount, Medium
Components

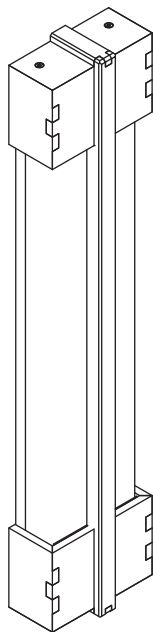

Ecco Surface Mount, Medium Assembly

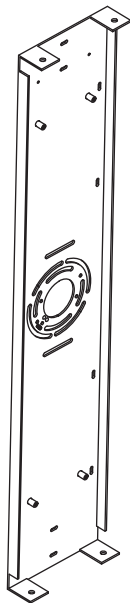

Backplate




LED Board



Socket Head Screws (x4)




Canopy Screws (x4)




Hardware Pack

Step 1

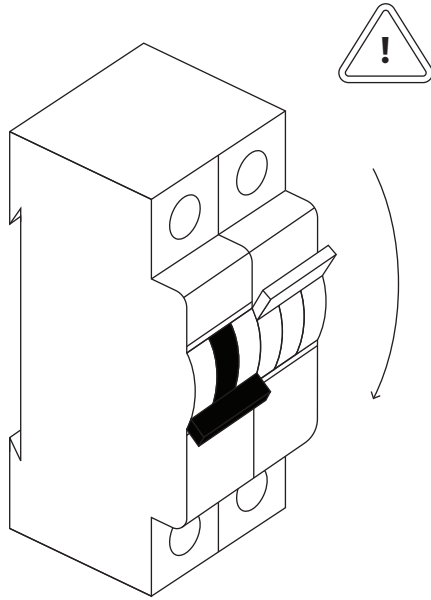


Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

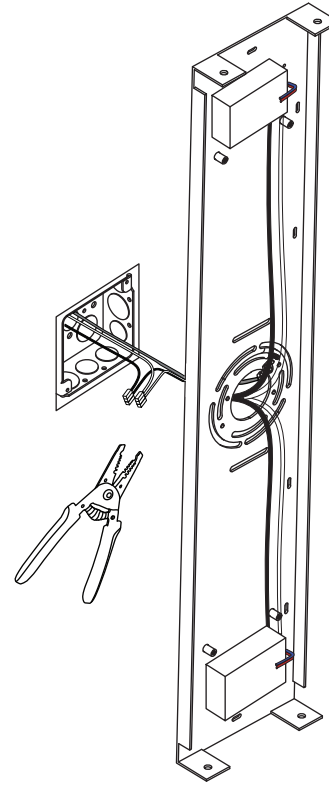

Use the wago clips to connect the wires from the junction box to the corresponding wires on the drivers: the white wire is neutral and the black wire is live. Connect the Green/Yellow wire the the grounding wire in the junction box. If you are using 0-10V dimming connect the pink and purple wires to the dimming system. If you are using TRIAC or ELV dimming, simply cap the wago on the ends of the purple and pink wire. If needed, use a wire stripper to remove 3/8" insulation from each wire before inserting them into the corresponding wago clip. Leave the red and blue wires accessible. These wires will be connected to the LED light source in step 4.


Step 3

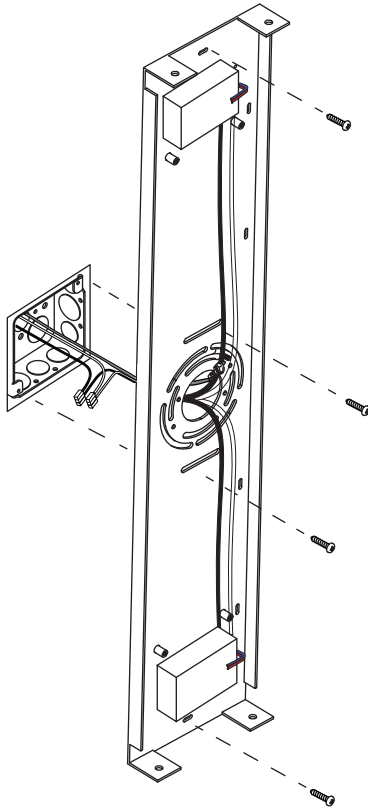

Mount the backplate to the junction box using a Phillips head screwdriver to tighten the mounting screws. For additional support, mount the backplate to the wall using anchors appropriate for your wall material.

Make sure blue and red leads are accessible.


Step 4

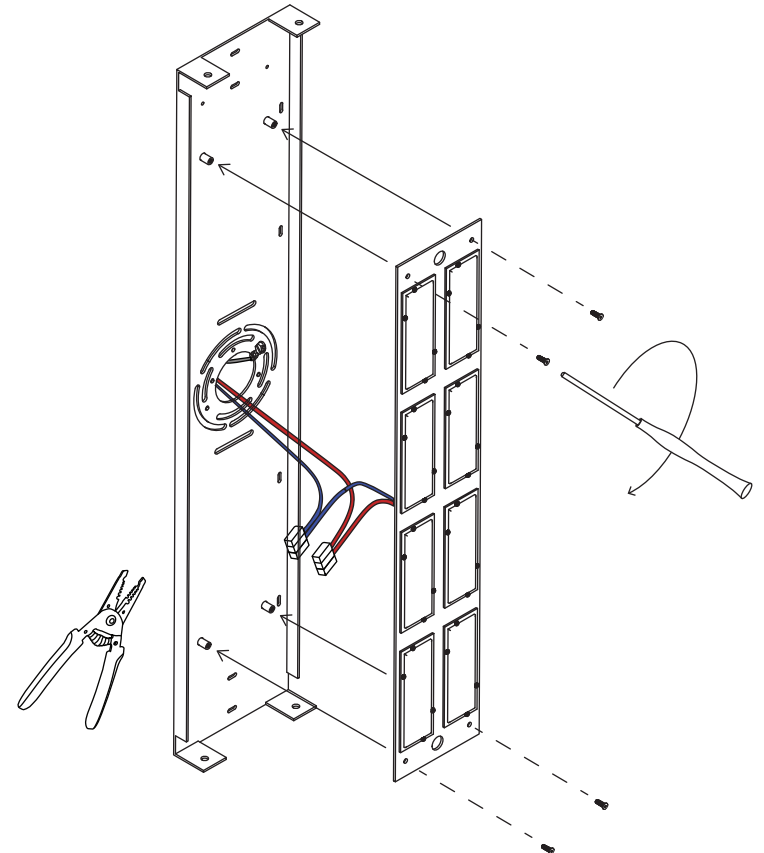

Connect the blue and red wires from the driver to the blue and red wires on the LED light source located on LED board. If needed, use a wire stripper to remove 3/8" insulation from each wire before inserting them into the corresponding wago clip.


Align holes on LED board with threaded standoffs on backplate. Secure board with screwdriver found in hardware pack.

Step 5

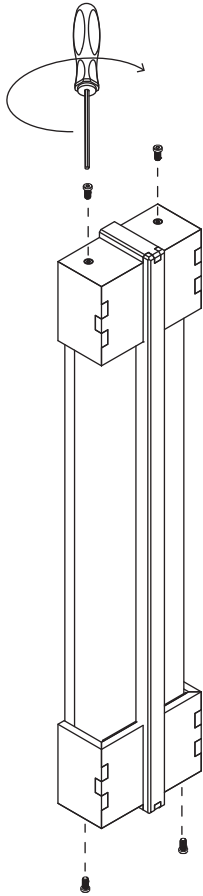


Align the holes of the backplate with the holes of the Ecco Surface Mount Assembly. Secure the assembly in place with the canopy screws and screwdriver found in the hardware pack.

Step 6

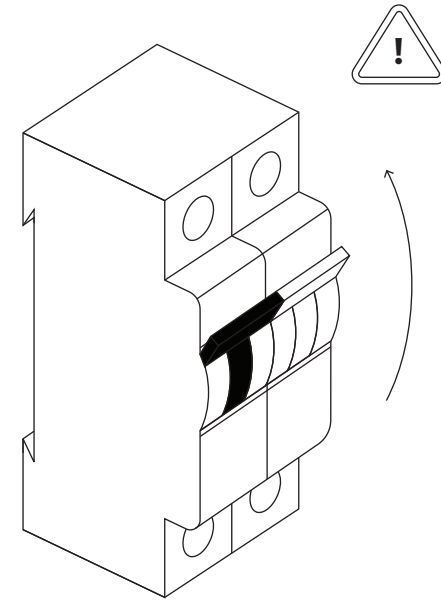

Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)

*Ecco Surface Mount, Large
Components*

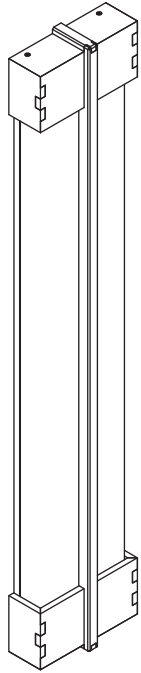

Ecco Surface Mount, Large Assembly



Backplate




LED Board




Socket Head Screws (x4)



Canopy Screws (x4)




Dimmable LED Driver




Hardware Pack

Step 1

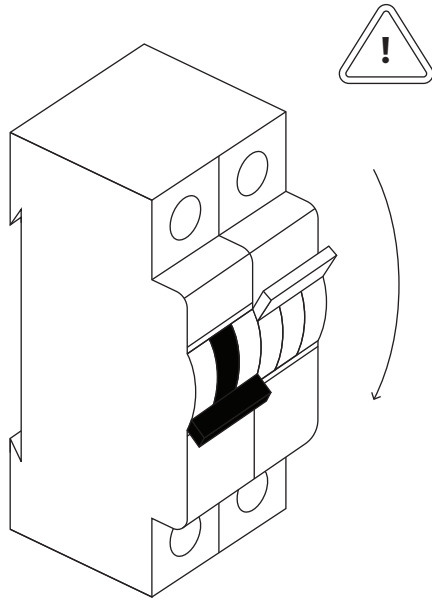

Before beginning installation, turn off electrical power at the main fuse box or circuit panel.


Step 2

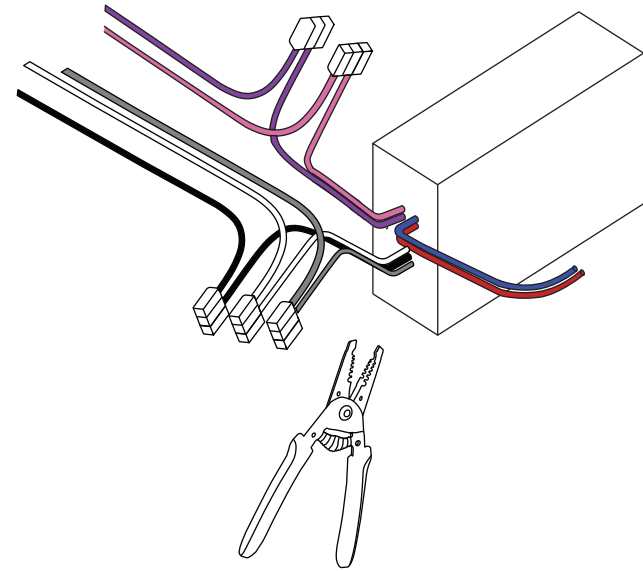

Install driver provided in remote location. Use the wago clips to connect the wires from the driver to the corresponding wires of power source: the white wire is neutral and the black wire is live. Connect the Green/Yellow wire the the grounding wire of power source. If you are using 0-10V dimming connect the pink and purple wires to the dimming system. If you are using TRIAC or ELV dimming, simply cap the wago on the ends of the purple and pink wire. If needed, use a wire stripper to remove 3/8" insulation from each wire before inserting them into the corresponding wago clip.

Make sure the red and blue wires on driver are accessible.


Step 3

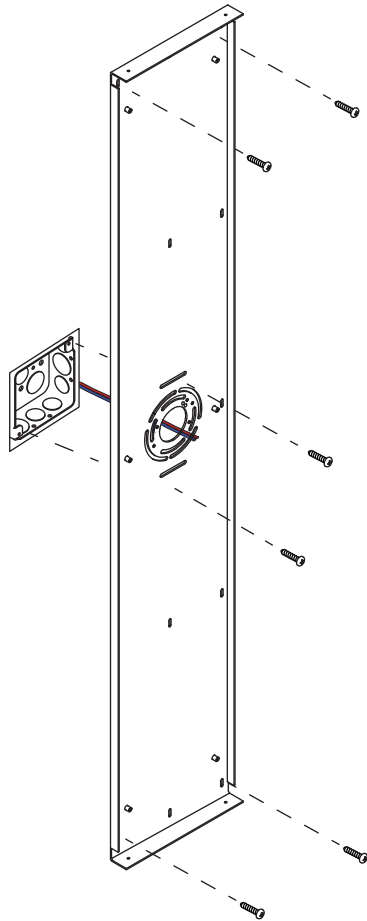

Mount the backplate to the junction box or wall using a Phillips head screwdriver to tighten the mounting screws. For additional support, mount the backplate to the wall using anchors appropriate for your wall material.

Make sure blue and red leads are accessible.


Step 4

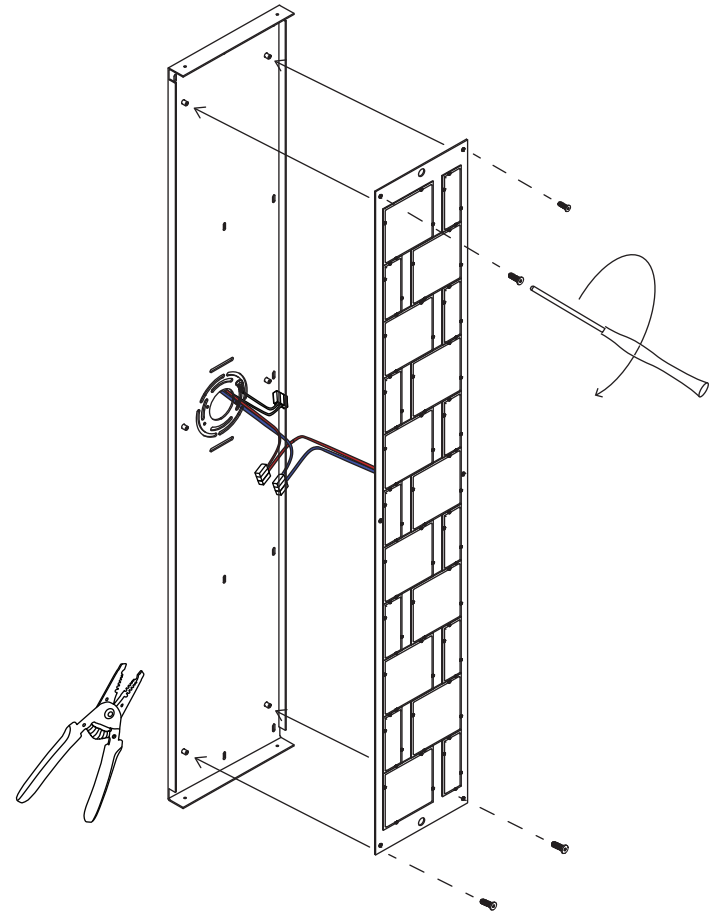

Connect the blue and red wires from the driver to the blue and red wires on the LED light source located on LED board. If needed, use a wire stripper to remove 3/8" insulation from each wire before inserting them into the corresponding wago clip.


Align holes on LED board with threaded standoffs on backplate. Secure board with screwdriver found in hardware pack.

Step 5

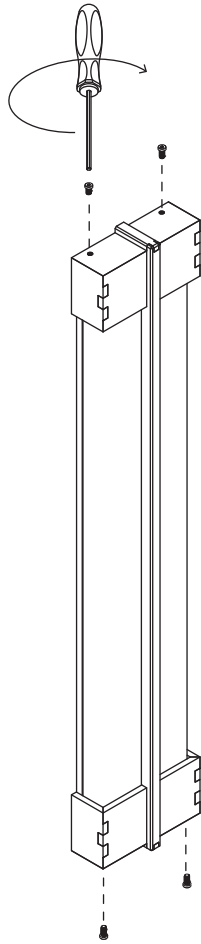

Align the holes of the backplate with the holes of the Ecco Surface Mount Assembly. Secure the assembly in place with the canopy screws and screwdriver found in the hardware pack.

Step 6

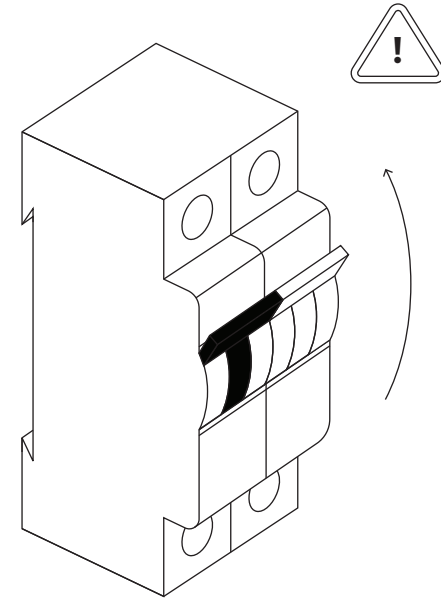

Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)

Never use scouring pads or abrasive cleaning solutions. If it comes in a bottle, it is bad for your fixture. Instead, we recommend using soft microfiber cloths, which are gentler on our products and the planet.

For Metal: Wipe with a damp or dry microfiber cloth. Please note that our brass is unlaquered, and will darken naturally over time.

For Glass: Wipe clear or colored glass with a damp microfiber cloth. For sandblasted or etched glass, use a dry microfiber cloth. Removable glass shades can be washed carefully in a sink using warm or hot water.

For Ceramic: Wipe with a damp microfiber cloth. Do not submerge in water.