


For Model : FSN-9012-ETCH-BRSS/FSN-9019-ETCH-BRSS

IMPORTANT

- . Justice Design recommends that a licensed electrician install this lighting fixture
- . Installation must comply with all building, safety, and electrical codes and requirements
- . Disconnect power to the junction box prior to installation
- . Do not reconnect power until this fixture is properly installed
- . This fixture is designed to mount to a standard metal 4-0 octagonal junction box

**Hardware Pack contains:**


- A. (2) Mounting Screws
- B. (2) Screws
- C. (3) Wire Nuts
- D. (1) Mounting Plate



D. E.

Other parts included in the box:


- E. (1) Stem
- F. (1) Hex Nut
- G. (2) Washer
- H. (1) Ground Wire
- I. (1) Steel Washer
- J. (2) Glass Shade

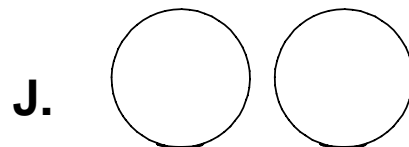


1

Attach the mounting plate (D) to junction box using mounting screws (A).

Note: The side of the mounting plate marked "GND" must face out. The **junction box is not included**.

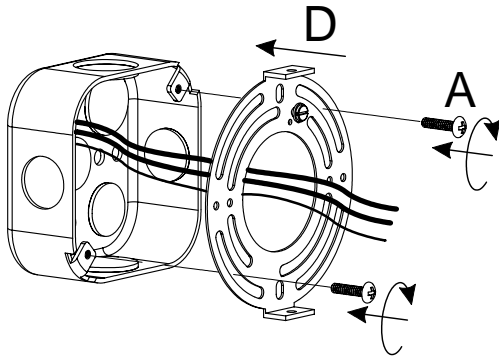


2

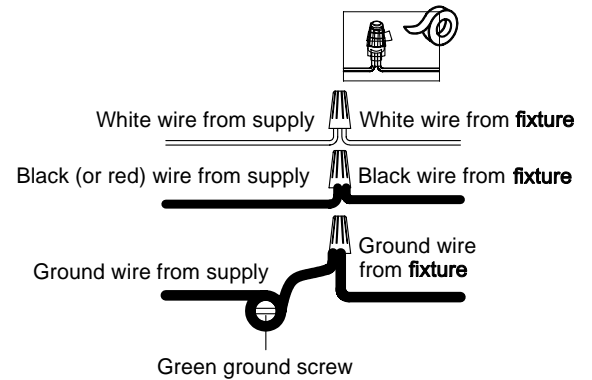

3

1. Tuck wires and wire nuts(C) into junction box. Attach canopy to mounting plate (D) then lock it securely with the screws (B).
2. NOTE: Install bulbs (Not included). Take care never to exceed maximum wattage.
3. Install the glass shade (J) onto the socket.

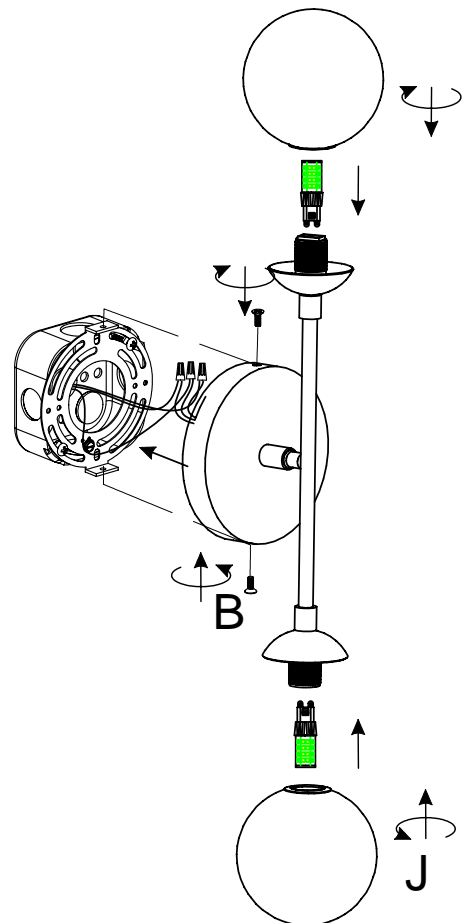


**Your installation is now complete.
Return power to the junction box
and test the fixture.**

Semi-flush


1

Attach the mounting plate (D) to junction box using mounting screws (A).

Note: The side of the mounting plate marked "GND" must face out. The junction box is not included.

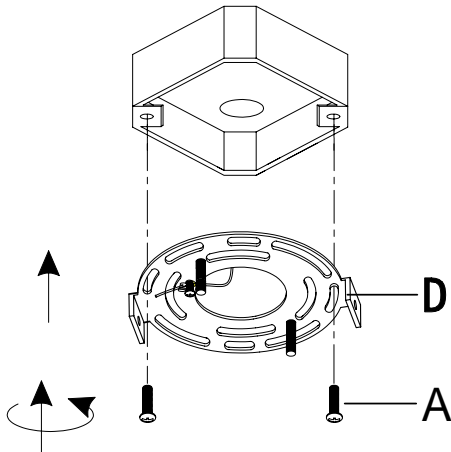


2

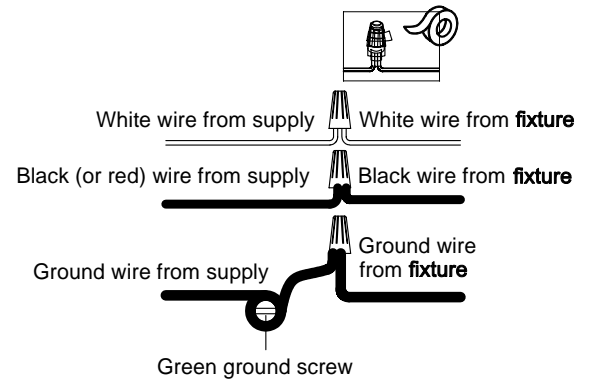


3

Install the stem (E) into the coupling, the canopy, steel washer (I), washer (G), ground wire (H), washer (G) onto the stem (E) then lock it securely with the hex nut (F).

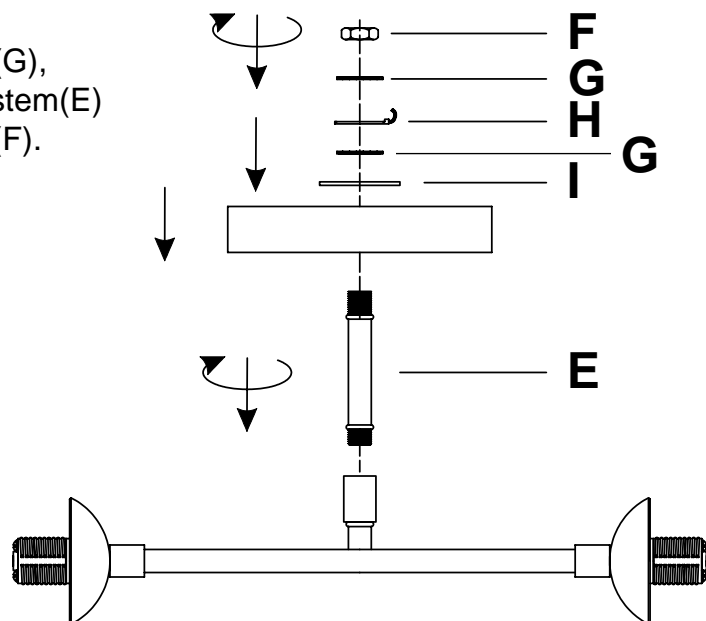

4

1. Tuck wires and wire nuts(C) into junction box. Attach canopy to mounting plate (D) then lock it securely with the screws (B).
2. NOTE: Install bulbs (Not included).
Take care never to exceed maximum wattage.
3. Install the glass shade (J) onto the socket.

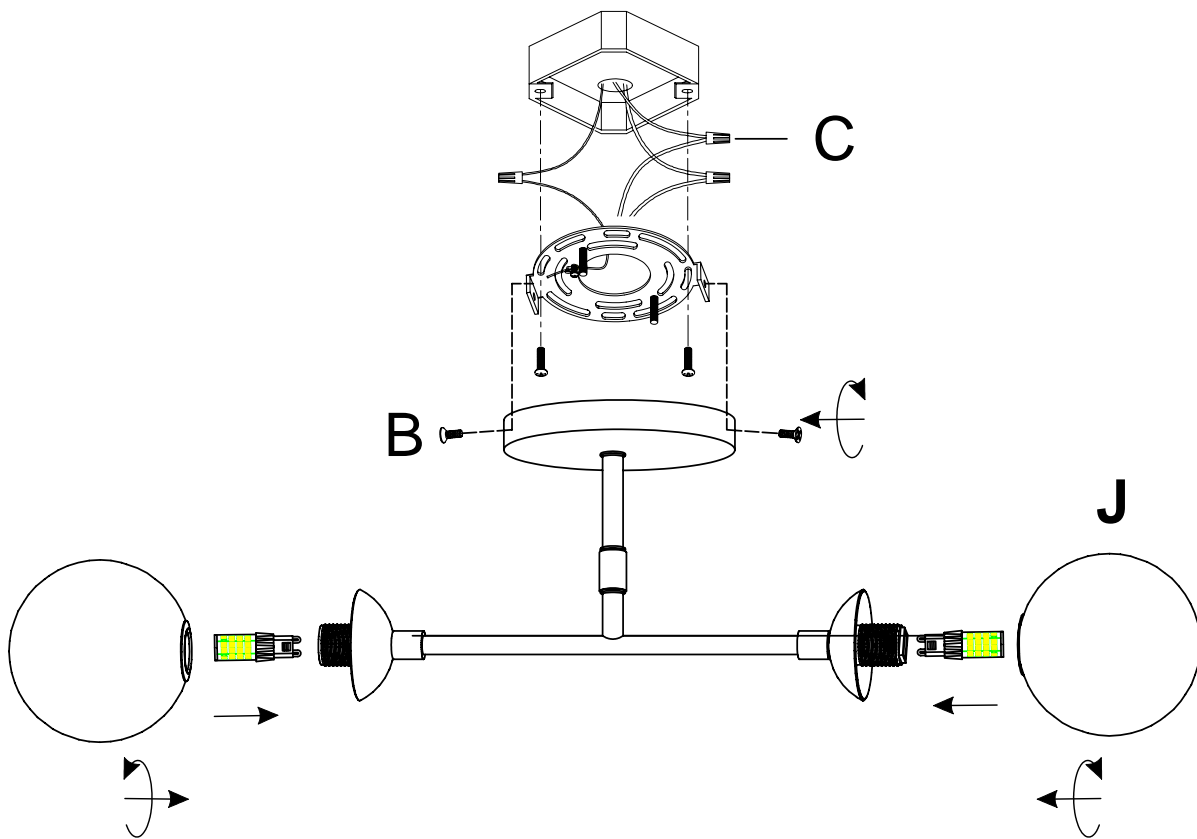

**Your installation is now complete.
Return power to the junction box
and test the fixture.**