

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528645RSG
SEMI-FLUSH MOUNT CONVERTIBLE

I M A G E



If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plait appel pour l'assistance.

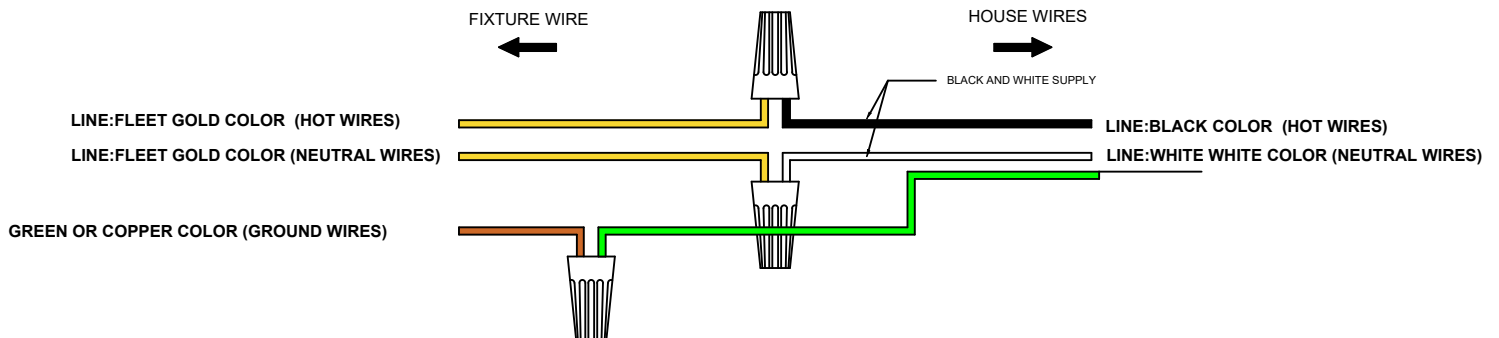
Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Si vous n'êtes pas familier avec le câblage électrique, appelez un électricien qualifié pour installer cet appareil. Plus d'une personne peut être nécessaire d'installer appareil, assurez vous que vous disposez de l'aide assez qualifié.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.

WIRING DIAGRAM

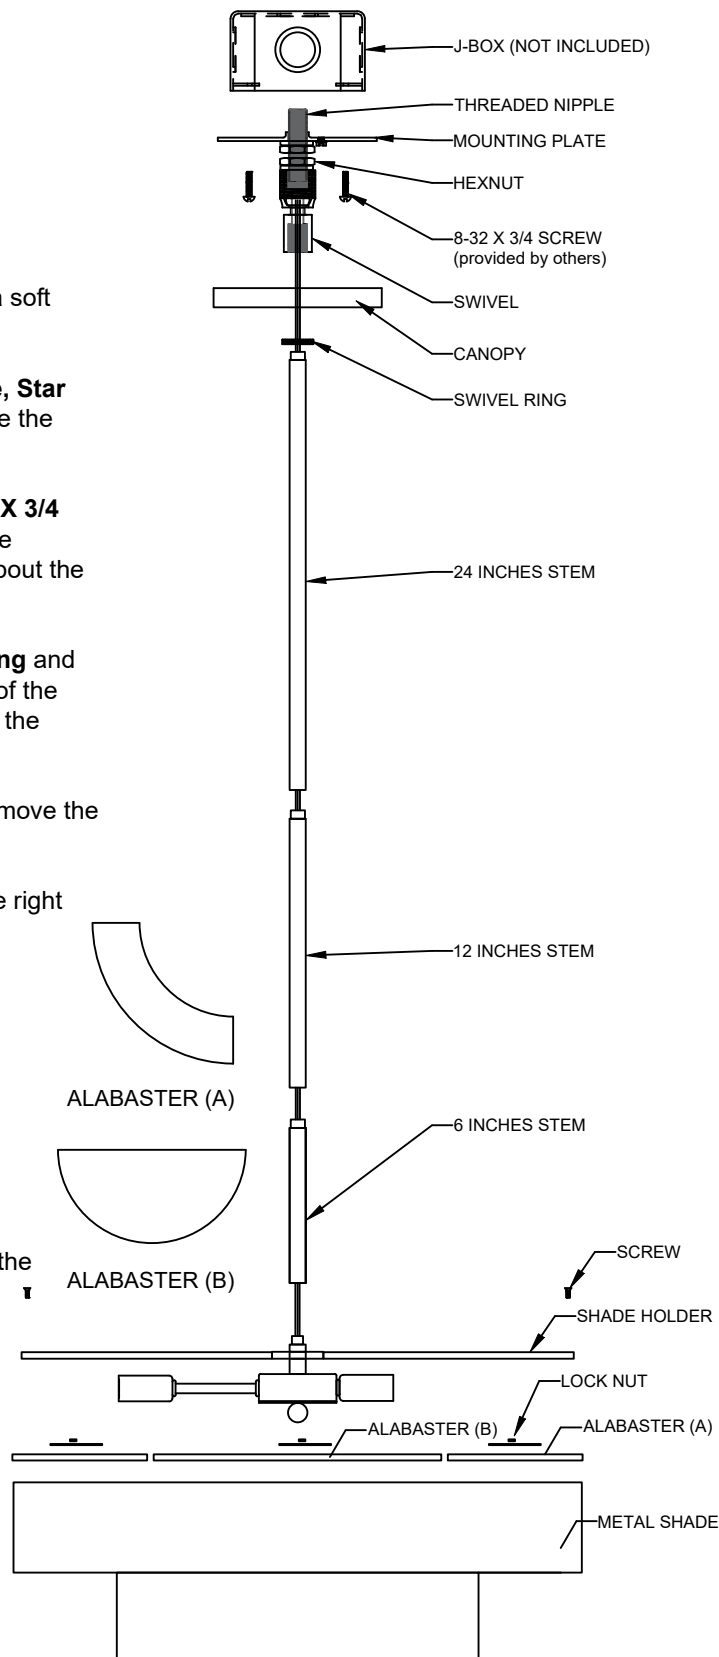


ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528645RSG
SEMI-FLUSH MOUNT CONVERTIBLE

ELECTRICAL / MOUNTING INSTALLATION

- STEP 1:** Carefully remove all parts from the box and lay them on a soft clean surface. Check to ensure no parts are missing.
- STEP 2:** Assemble the **Mounting Plate** with the **Threaded Nipple**, **Star Washer** and **(2) Hex nuts**. Attach the **Swivel** and remove the **Swivel Ring**.
- STEP 3:** Install the mounting assembly to the **j-box** using **(2) 8-32 X 3/4 screws (provided by others)**. Place the **canopy** onto the assembly. The face of the canopy should be located at about the center of the threaded section.
- STEP 4:** After determine the **canopy** height remove the **swivel ring** and **canopy**. Tighten the bottom **hex nut** to lock the position of the **Swivel** and tighten the top **hex nut** to lock the position of the **Mounting Plate**.
- STEP 5:** Unscrew the **8-32 x 3/4 screw (provided by other)** to remove the mounting plate.
- STEP 6:** Determine the total fixture height requirement and use the right length of **center stem** to achieve. .
- Note:** If the fixture was intended to be semi-flush use the **6" center stem** only.
- STEP 7:** Insert the **swivel ring** and **canopy** to the **center stem** going down to the top on shade holder.
- STEP 8:** Carefully pass the wire through to the **swivel** with **canopy**, and attached it to the center stem.
- STEP 9:** Carefully lift the fixture and install the **mounting plate** to the **j-box**.
- Note:** Two manpower required to install, one is to install on the junction box, and the other was to hold the fixture.

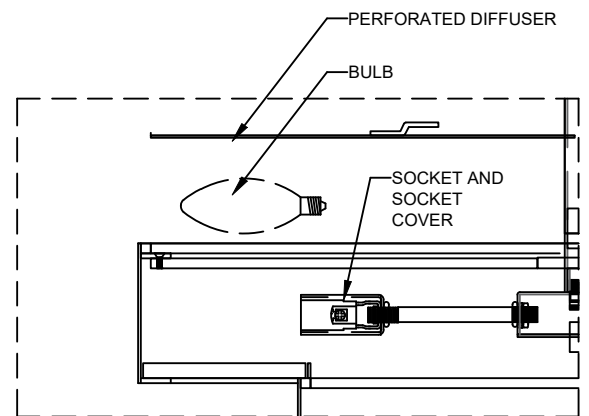
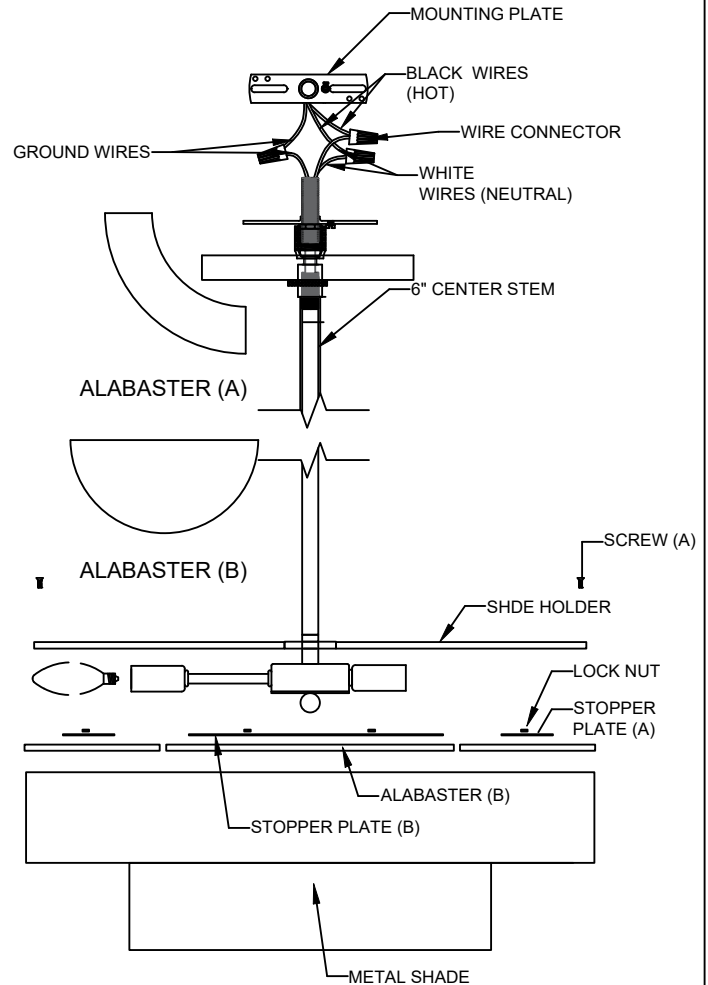


ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528645RSG
SEMI-FLUSH MOUNT CONVERTIBLE

ELECTRICAL / MOUNTING INSTALLATION

- STEP 10:** Refer to wiring diagram. With wire carefully thread through the swivel, connect the **black color supply wire (HOT WIRES)** to the **fleet gold color wire** of fixture wire with **wire connector**, connect the **white supply wire (NEUTRAL WIRE)** to the **fleet gold color wire** fixture wire with **wire connector**.
- STEP 11:** Carefully tuck all wires into outlet box ensuring that there are no wires pinched between the **canopy** and ceiling and cut the excess wire that will be not use.
- STEP 12:** Carefully attach the **alabaster stone (A)** and **(B)** to the metal shade. secure the alabaster stone using the stopper bar and lock nut provided.
- STEP 13:** Carefully install the metal shade with the **alabaster** to the **shade holder** and secure using the **(4) screws(A)** provided.
- STEP 14:** Install the **(8) e12 bulbs**. Do not put bulb that exceeds 6 watts.
- STEP 15:** Install **(4) perforated diffuser** on the top of the metal shade.




















FOR LIGHTING MAINTENANCE:

- Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.
- Refrain from using harsh cleaning liquids that may cause chemical reaction on the hand painted finishes.
- Always refer to the Assembly Instruction before removing any components.
- HANDLE WITH CARE.

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528645RSG
SEMI-FLUSH MOUNT CONVERTIBLE

PARTS LIST

PART NO.	PARTS NAME	IMAGE/DRAWING	QTY
KS-A-56	Mounting Plate (1/4IP THREAD)		1 pc
	Hex Nut (1/4IP THREAD)		2 pcs
	Washer (1/4 IP)		2 pcs
	Threaded Nipple 1/4IP THREAD (1/2" Ø X 2 1/2" L.)		1 pc
	Strain Relief (1/8 IP)		2 pcs
CS-BS-1	Canopy (6 1/2" Ø X 3/4" HT X 1" Ø CENTER HOLE)		1 pc
LS-A-386	Swivel (15/16 DIA X 2-3/16 HT X 1/2 FINED THREAD 90 DEG.)		1 pc
LS-A-426	Center Stem (5/8 IN. R.T) 6 IN. HT. W/ 5/8 IN. LENGTH FINE THREAD		1 pc
LS-A-427	Center Stem (5/8 IN. R.T) 12 IN. HT. W/ 5/8 IN. LENGTH FINE THREAD		1 pc
LS-A-428	Center Stem (5/8 IN. R.T) 24 IN. HT. W/ 5/8 IN. LENGTH FINE THREAD		1 pc
CS-FB-5	Stopper Plate (A) (3/4" W X 3 1/4" L X 1/8 IN THK W/ 3/16"Ø CENTER HOLE)		4 pcs
CS-FB-5	Stopper Plate (B) (3/4" W X 11 5/16" L X 1/8 IN THK W/ 3/16"Ø CENTER HOLE)		1 pc
BN-B-34	Flat Head Screw ((4)A+(4)B) (3/4" W X 3 1/4" L X 1/8 IN THK W/ 3/16"Ø CENTER HOLE)		4 pcs
BN-N-9	Lock Nut (8-32 NUT)		6 pcs
KS-G-489	ALABASTER (A) (ALABASTER QUARTER MOON DIFFUSER 10-3/4 X 10-3/4 X 9MM THK)		4 pcs
KS-G-488	ALABASTER (B) (ALABASTER HALF MOON DIFFUSER 13-1/4 X 6-9/16HT X 9MM THK)		2 pcs
KS-A-141	PERFORATED DIFFUSER (PERFORATED DIFFUSER HALF MOON 21 5/16" W X 10 11/16" HT)		2 pcs