



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528655RSG
32 IN DIAMETER PENDANT

I M A G E



If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plaît appel pour l'assistance.

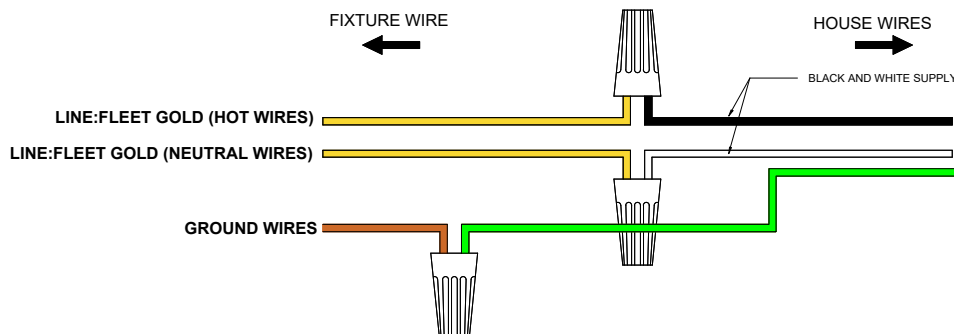
Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Ce produit doit être installé conformément au code d'installation applicable par une personne connaissant la construction et le fonctionnement du produit ainsi que les dangers encourus.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.

WIRING DIAGRAM




ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528655RSG
32 IN DIAMETER PENDANT

CEILING BRACE OPTIONS

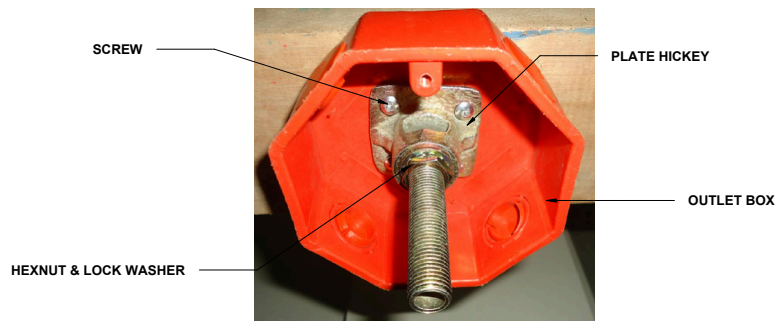
" METHOD A "



Brace is directly on top of the outlet box and not accessible).

Using a 1/8" drill bit, pre-drill (4) holes into the wood brace through the (4) hole pattern in the outlet box. (Outlet box is shown as a cutaway for Clarity). Secure the hickey to the brace with (4) #8 x 1-1/2" screws(provided by other). The wire way opening should mount as shown, between the outlet box and 2 mounting flanges.

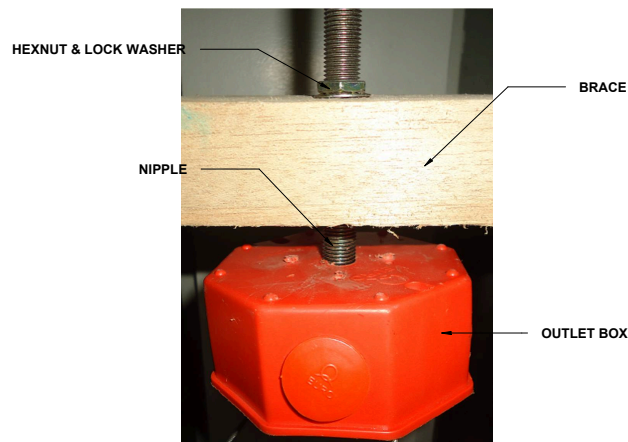" METHOD B "



(Brace is above and not in contact with the outlet box and is accessible)

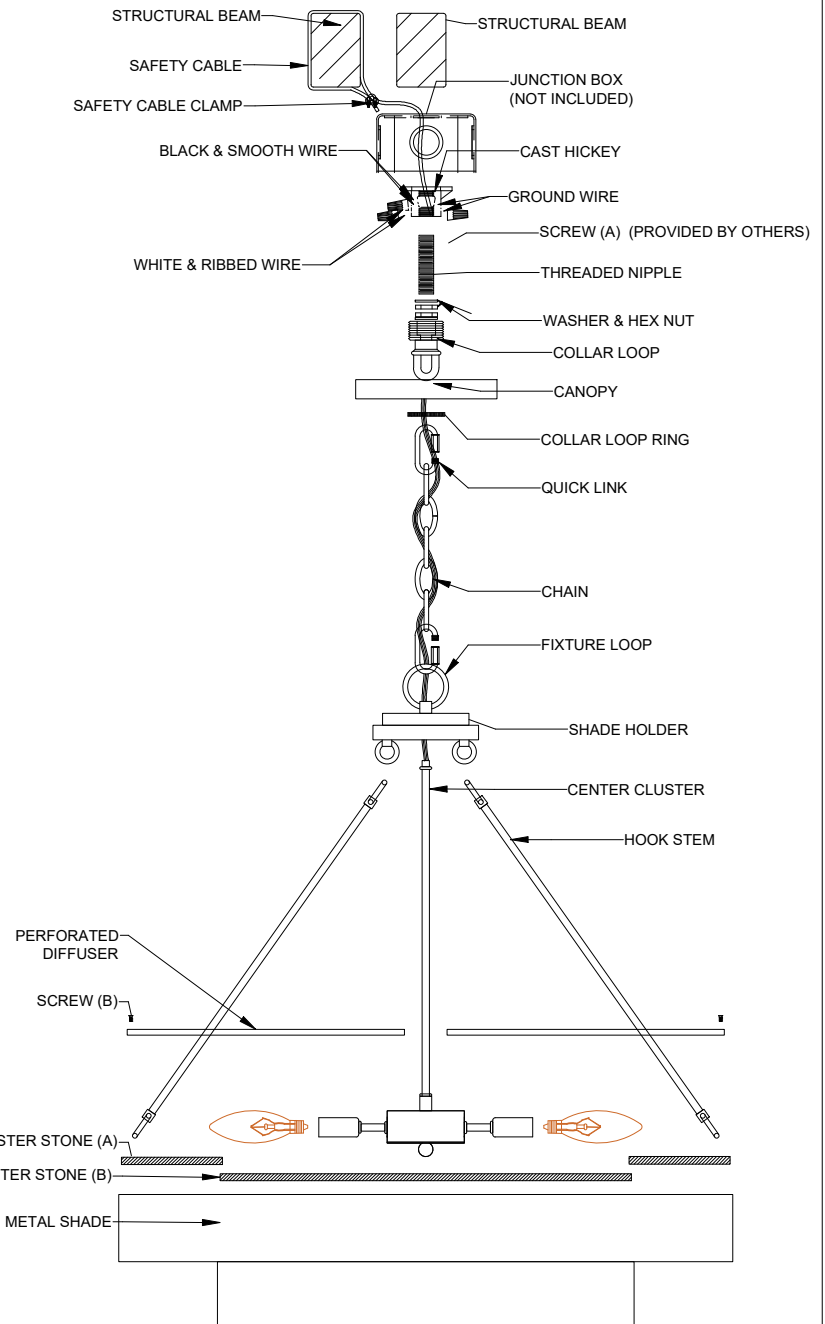
Remove center knockout from outlet box. In line with the center knockout, drill a 9/16" hole in the brace. (Brace should be fastened to the ceiling joist after pipe is installed). Assemble hickey to one end of a 1/4 pipe nipple. The pipe should be flush with inside of the hickey wire way. Insert pipe through back of outlet box and through the brace above. Secure pipe with a 1/4 pipe nut.

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528655RSG
32 IN DIAMETER PENDANT

ELECTRICAL / MOUNTING INSTALLATION

- STEP 1:** Carefully remove all parts from the box and lay them on a soft clean surface. Check to ensure no parts are missing.
- STEP 2:** Assemble the **Cast Hickey** with the **Threaded Nipple, Star Washer and Hex nuts**. Attach the **collar loop** and remove the **Collar Loop Ring**.
- STEP 3:** Install the mounting assembly to the **j-box** using **(4) Screws (A) (provided by others)**. Place the **canopy** onto the assembly. The face of the **canopy** should be located at about the center of the threaded section.
- STEP 4:** After determine the **canopy** height remove the **swivel ring** and **canopy**. Tighten the bottom **hex nut** to lock the position of the **Swivel** and tighten the top **hex nut** to lock the position of the **Mounting Plate**.
- STEP 5:** Unscrew the **screw(A) (provided by other)** to remove the mounting plate and lock the position of **collar loop** and **cast hickey** using the **(2) nut** provided.
- STEP 6:** Determine fixture height. Make adjustment if needed. Attach the **center cluster** to the **shade holder** and attach the **chain** to **fixture loop** using **quick link**.
- STEP 7:** Insert the **collar loop ring** and **canopy** to the
- STEP 8:** Lace the wires through the **chain** (every other link)
- STEP 9:** Attached the end chain to the **quick link chain with collar loop**.
- STEP 10:** Pull ends of wire through center hole of **collar loop** and out the openings of the **cast hickey**. determine the wire length needed and cut all excess wires.



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528655RSG
32 IN DIAMETER PENDANT

ELECTRICAL / MOUNTING INSTALLATION

STEP 11: Refer to wiring diagram. With wire carefully threaded through **canopy**, connect the **black color supply wire** to the **fleet gold color fixture wire** with wire connector, connect the **white color supply wire** to the **fleet gold color fixture wire** with wire connector. Connect **ground wire from fixture** with **supply ground wire**.

STEP 12: Carefully tuck in all wires and raise the **canopy** to the junction box.

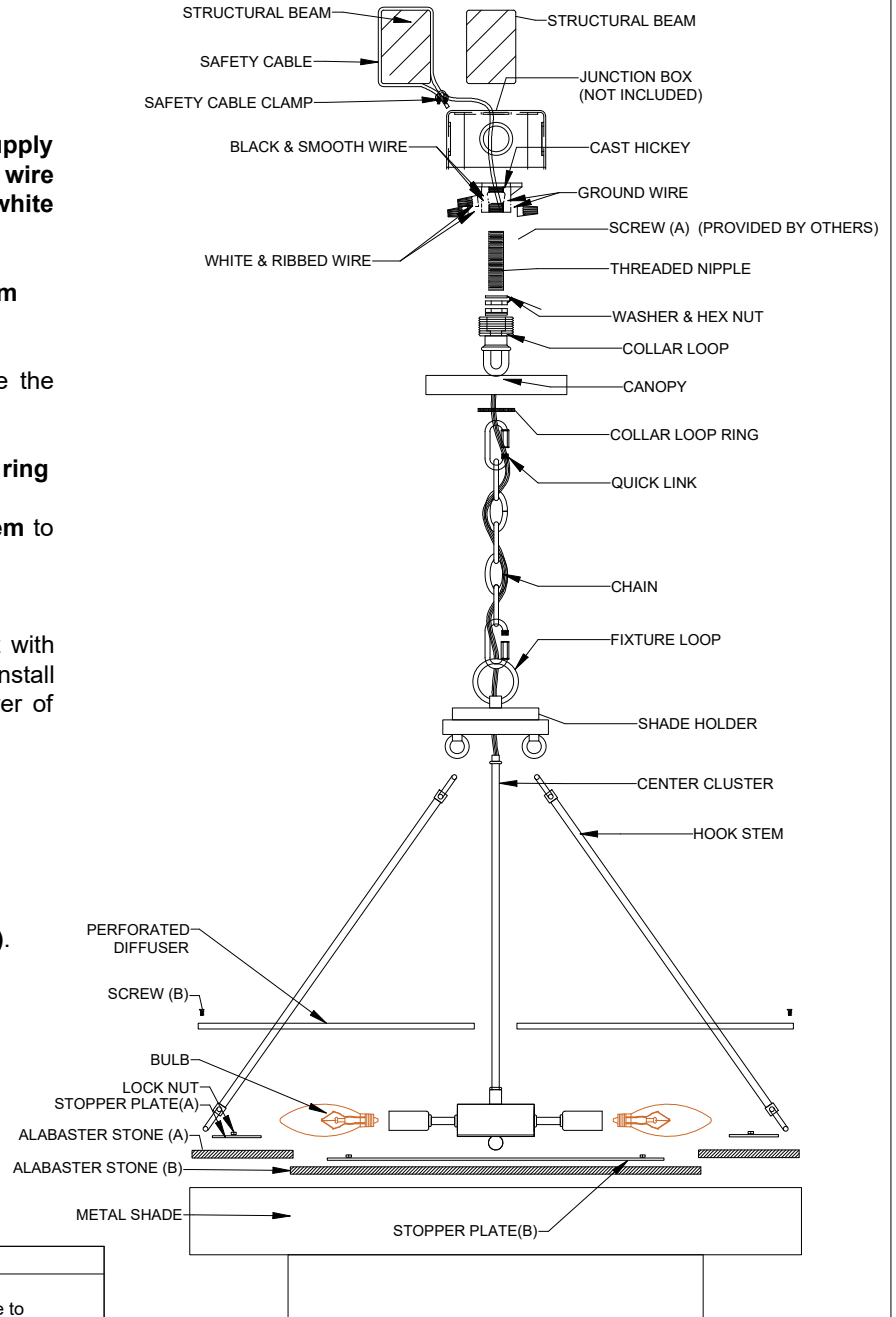
STEP 13: Secure the **canopy** with **collar loop ring**

STEP 14: Carefully attached the (4) **Hook Stem** to the **shade holder** and **metal shade**.

STEP 15: Install the **alabaster (A)** to the top layer of **metal shade** and secure it with the **stopper plate** and **lock nut**. Install the **alabaster (B)** to the bottom layer of **metal shade** and secure it using the **stopper plate** and **lock nut**.

STEP 16: Install the (12) **E12 Bulb**, Do not install bulb that exceed 6 watts.

STEP 17: Carefully install the (4) **perforated diffuser** and lock using (8) **screw(B)**.



CLEANING MAINTENANCE:

















WARNING!!: To ensure the safety on electric shock please make sure to unplug or not connected the fixture to the outlet.

- When cleaning the alabaster stone please use a soap and water.
Note: Refrain from using harsh cleaning liquids that may cause a chemical reaction to the alabaster stone
- Always refer to the Assembly Instruction before removing any components.
- HANDLE WITH CARE.

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528655RSG
32 IN DIAMETER PENDANT

PARTS LIST

PART NO.	PARTS NAME	IMAGE/DRAWING	QTY
KS-A-53	Mounting Plate (1/4IP THREAD)		1 pc
	Hex Nut (1/4IP THREAD)		2 pcs
	Washer (1/4 IP)		2 pcs
	Threaded Nipple Short 1/4IP THREAD (1/2" Ø X 2 1/2" L.)		1 pc
	Threaded Nipple Long 1/4IP THREAD (1/2" Ø X 2 1/2" L.)		1 pc
	Strain Relief (1/8 IP)		2 pcs
KS-A-251	Collar Loop & Collar Loop Ring (Gauge 4)		2 pcs
KS-A-249	QUICK LINK (Gauge 4)		2 pcs
KS-A-89	CHAIN (OVAL SHAPE CHAIN GAUGE 4 X 8 FT.)		1 pc
CS-BS-1	Canopy (6 1/2" Ø X 3/4" HT X 1" Ø CENTER HOLE)		1 pc
	Hook Stem (22 11/16" Length)		3 pcs
	Shade Holder (5 1/2" Ø x 5 3/16" ht.)		1 pc
CS-FB-5	Stopper Plate (A) (4 9/16" L x 3/4" W. X 1/8" Thk)		4 pcs
CS-FB-5	Stopper Plate (B) (20 1/2" L x 3/4" W. X 1/8" Thk)		1 pc
BN-B-34	Flat Head Screw ((4)A+(4)B) (3/4" W X 3 1/4" L X 1/8 IN THK W/ 3/16"Ø CENTER HOLE)		4 pcs
BN-N-9	Lock Nut (8-32 NUT)		6 pcs



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 528655RSG
32 IN DIAMETER PENDANT

PARTS LIST

PART NO.	PARTS NAME	IMAGE/DRAWING	QTY
KS-G-483	ALABASTER (A) ALABASTER QUARTER MOON DIFFUSER 15-3/4 X 15-3/4 X 3/16 THK		4 pcs
KS-G-482	ALABASTER (B) (ALABASTER HALF MOON DIFFUSER 21-3/8 W X 10-5/8 HT X 3/16 THK)		2 pcs
KS-A-141	PERFORATED DIFFUSER (PERFORATED DIFFUSER QUARTER MOON 15 7/16" W X 15 7/16" HT)		4 pcs