

Burlington 600 Phase

astro

General

Location:	Bathroom
Class:	cULus (Class I)
Location Rating:	Damp
Driver Required:	Mains 120V
Installation Orientation:	Wall Mount - Horizontal & Vertical
Fitting Method:	½" Stub Mount or 4" Octagon Box with included Canopy Kit
Main Material:	Metal - Zinc
Dimensions (mm):	H: 600 W: 110 D: 118
Dimensions (inch):	H: 23.62 W: 4.33 D: 4.65
Cut Out Hole (mm/inch):	-
Recess Depth (mm/inch):	-
Fire Rating:	-
Cable Length (mm/inch):	-
Gross Weight (lb):	6.16
Ada Compliant:	Yes - if installed in compliance with ADA 307.2
Ic Rating:	-

Lamp


Light Source:	Mid-Power LED
Wattage:	14.4W
Lamp Included:	Yes (Integral)
Maximum Lamp Length (mm/inch):	-
Luminous Flux (lm):	778
Colour Temp (K):	2700
Cri (Ra):	90
Macadam Ellipse:	3-Step
Tilt Adjustable Angle (°):	-
Rotation Adjustable Angle (°):	-
Average Lifetime (hrs):	52000
Beam Angle (°):	-

Electrical

Switched:	No
Dimmable:	Yes
Dimming Method:	Phase - Leading & Trailing Edge
Supply Frequency (Hz):	50/60
Driver/Ballast Voltage (V):	120
Driver Average Lifetime (hrs):	50000
Efficacy (lm/W):	54

Additional Information:

Shade Included:	-
Shade/Diffuser Material:	Plastic
Shade/Diffuser Finish:	-
F Mark:	Suitable for mounting on flammable materials

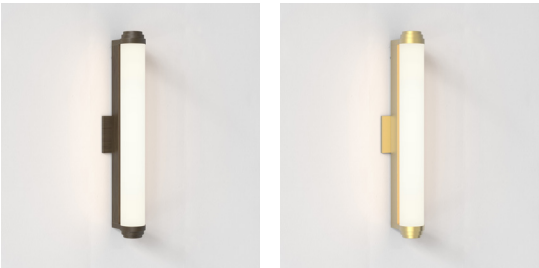

Code: 1477013  
Finish: Bronze

Code: 1477015  
Finish: Matt Gold

To maintain this product to its best condition, please view our care and cleaning guidelines on the support section of the astro website.

Astro® is a registered trademark of astro lighting limited. Astro lighting's fixture designs and imagery are protected under U.S. And international intellectual property laws, and all rights to such designs and imagery are expressly reserved.