

# Nodes 8 and 12 Light Chandelier

**KC1008, KC1012** 1.1

## GENERATION LIGHTING

### Pendant

#### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

#### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

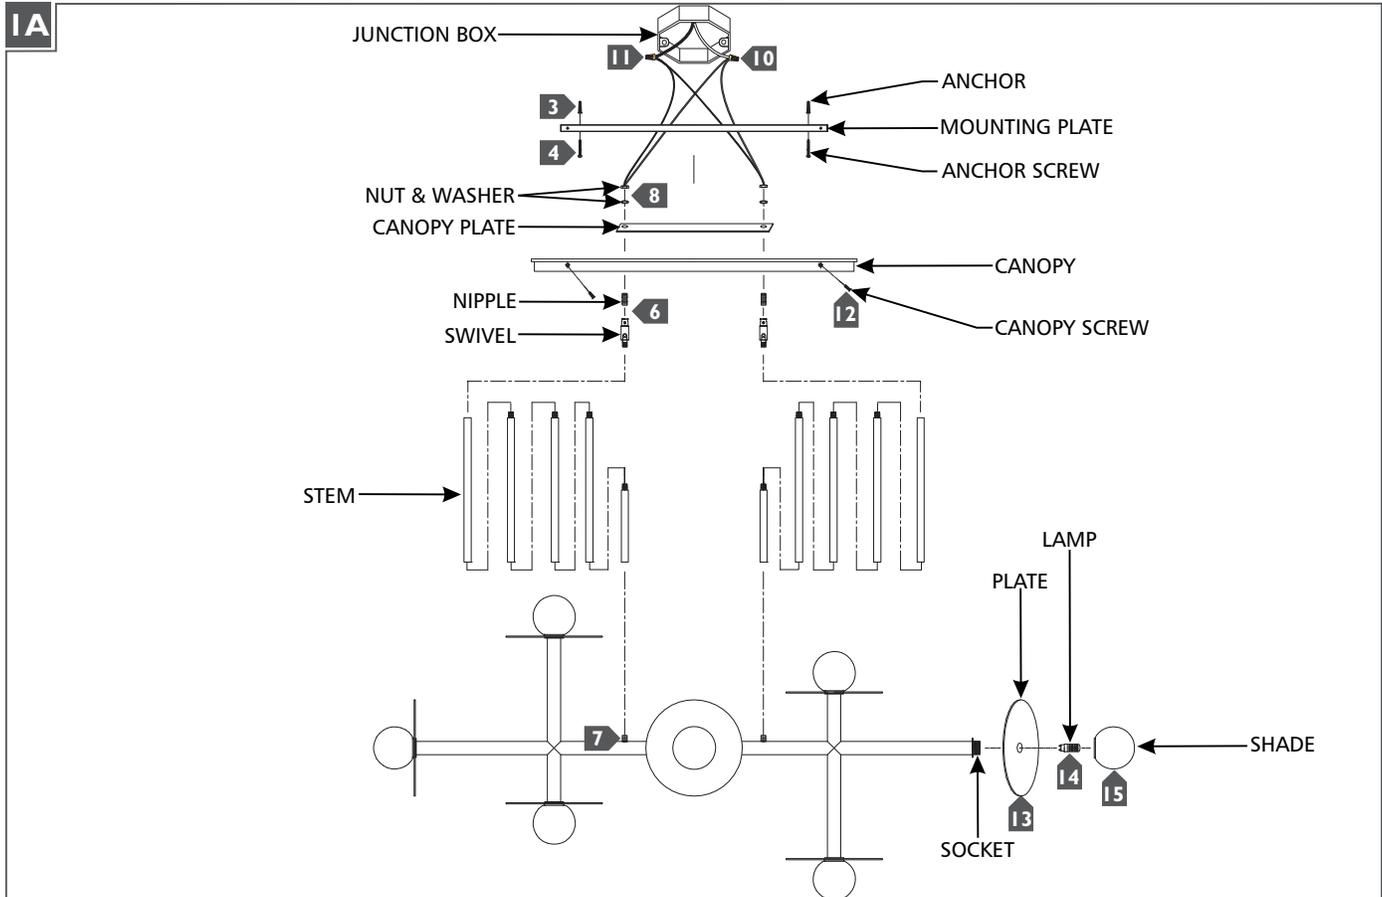

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor hole locations through the mounting plate, then remove the mounting plate.
- 3** Drill appropriate sized holes and install the anchors.
- 4** Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 5** Determine the wanted height of the fixture with the provided stems and assemble them by screwing them together.
- 6** Screw the nipples onto the swivels, then screw the swivel onto the stem assemblies.
- 7** Feed the cords through the stem assemblies and swivels, then screw the stem assemblies onto the fixture.
- 8** Feed the cords through the canopy and plate, then secure them onto the swivels using provided washers and hex nuts.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it place using the canopy screws.
- 13** **For KC1008 Only:** Place the plate over the socket. **For KC1012 Only:** Screw the plate onto the socket.
- 14** Install the lamps by pushing the lamp pins completely into the socket holes. Refer to the label on the socket for Max Wattage Information.
- 15** Install the shades by screwing them onto the sockets.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.